




**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift BP**  
**Unlocked Rail Cant -150mm**

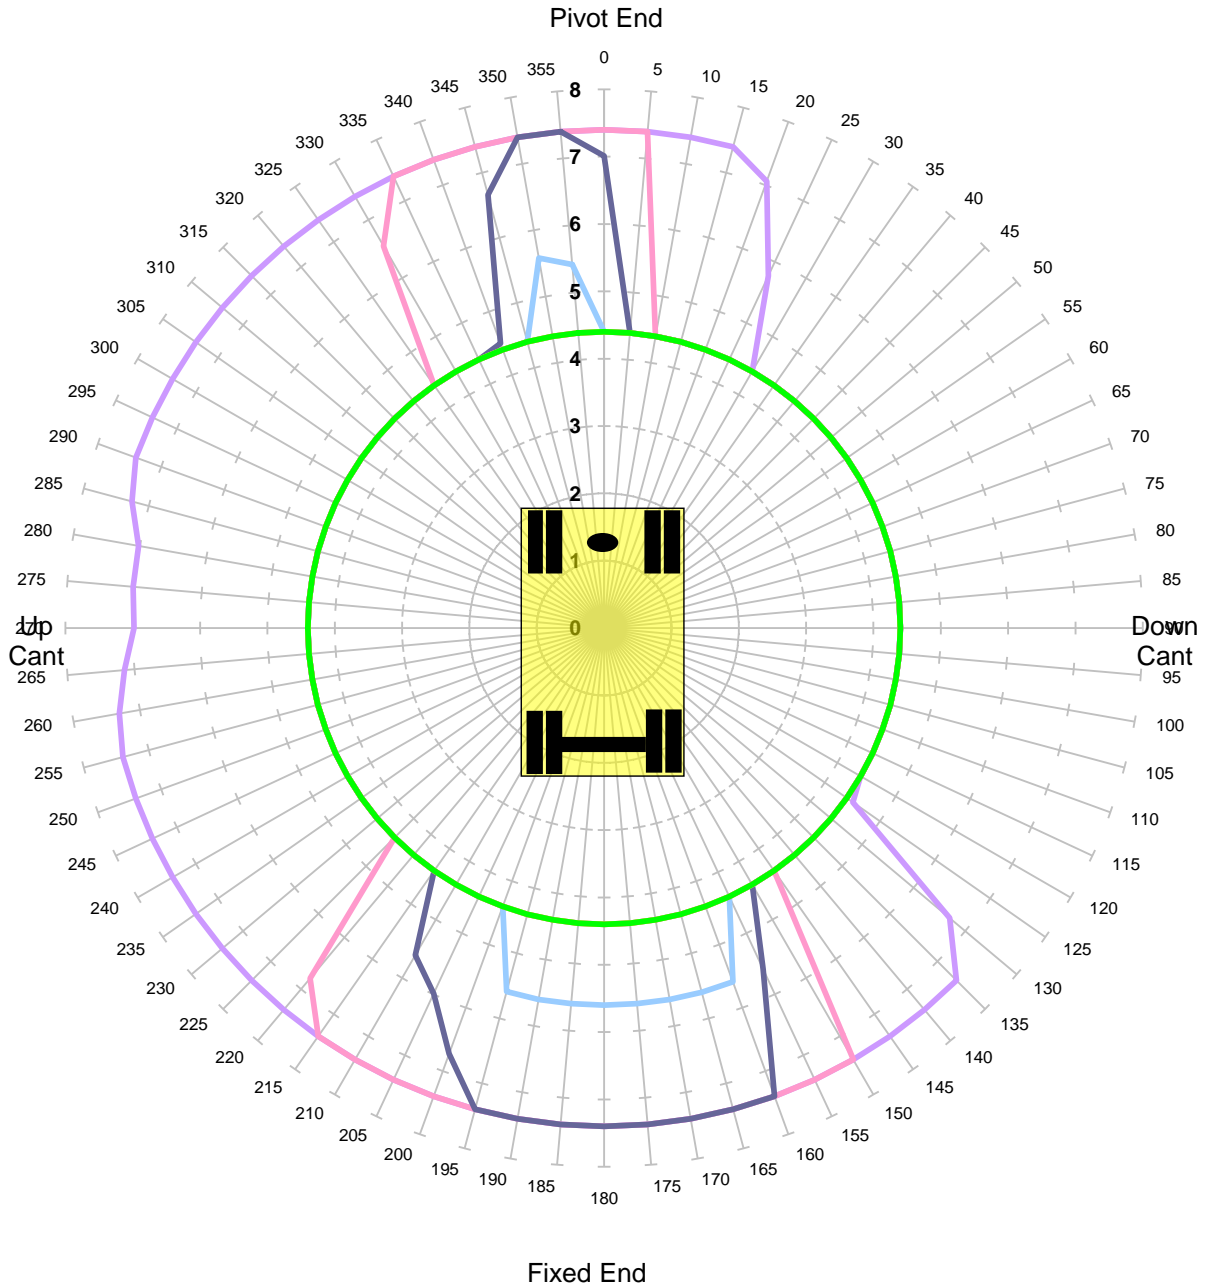


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	67.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift BP**  
**Unlocked Rail Cant -50mm**

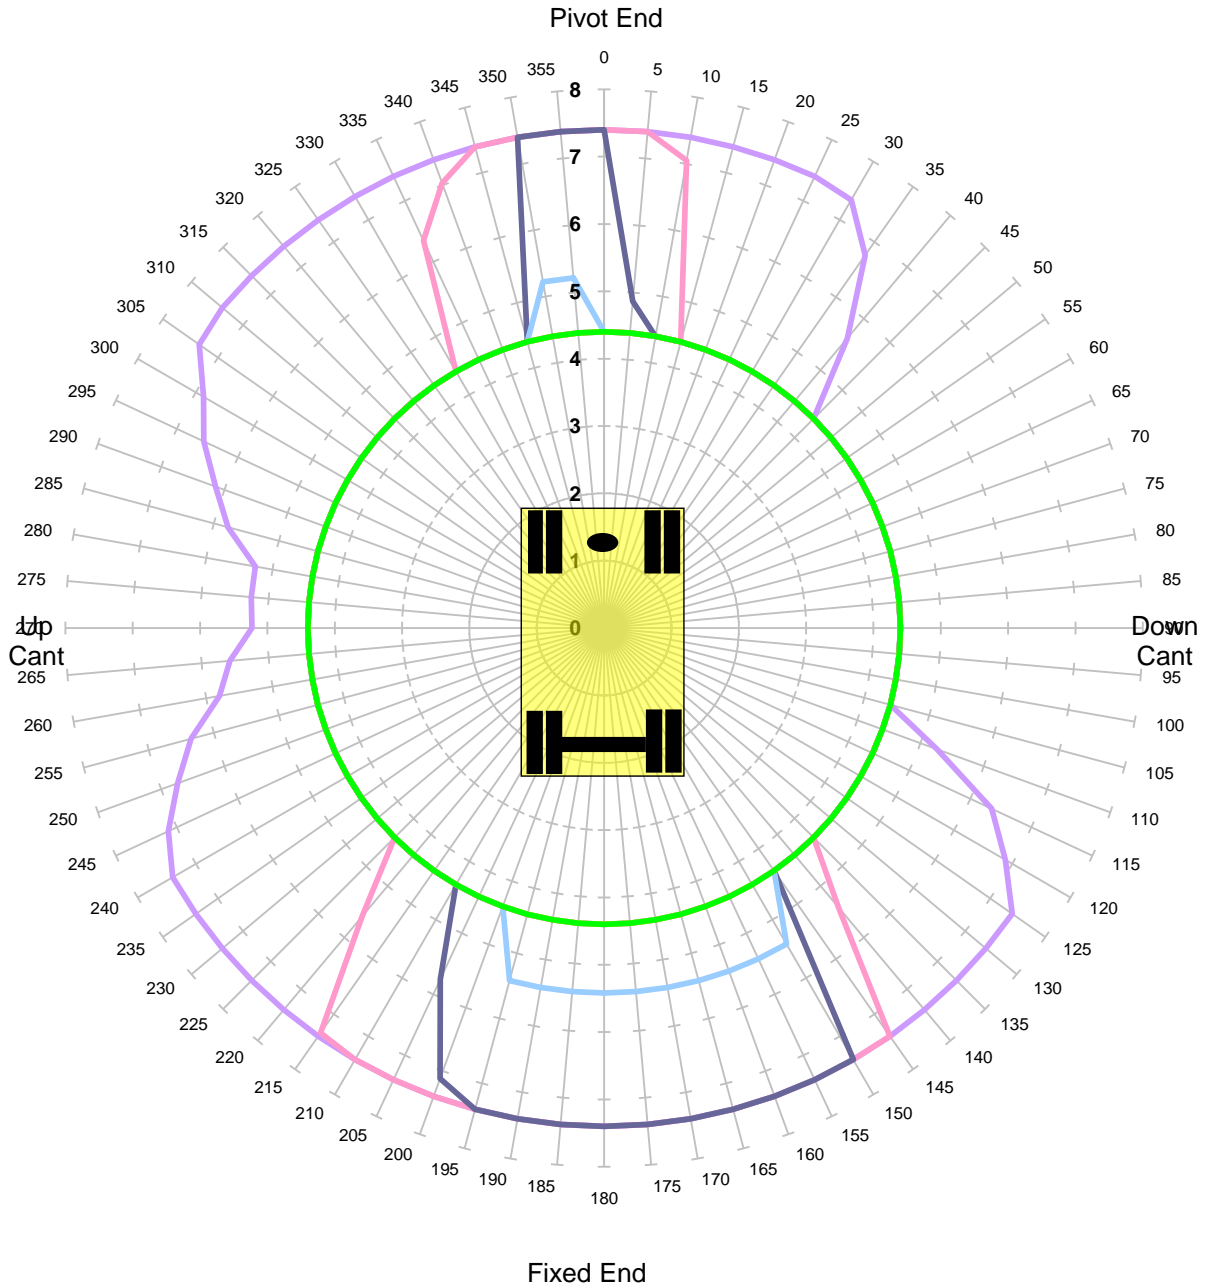


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	67.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift BP**  
**Unlocked Rail Cant 50mm**

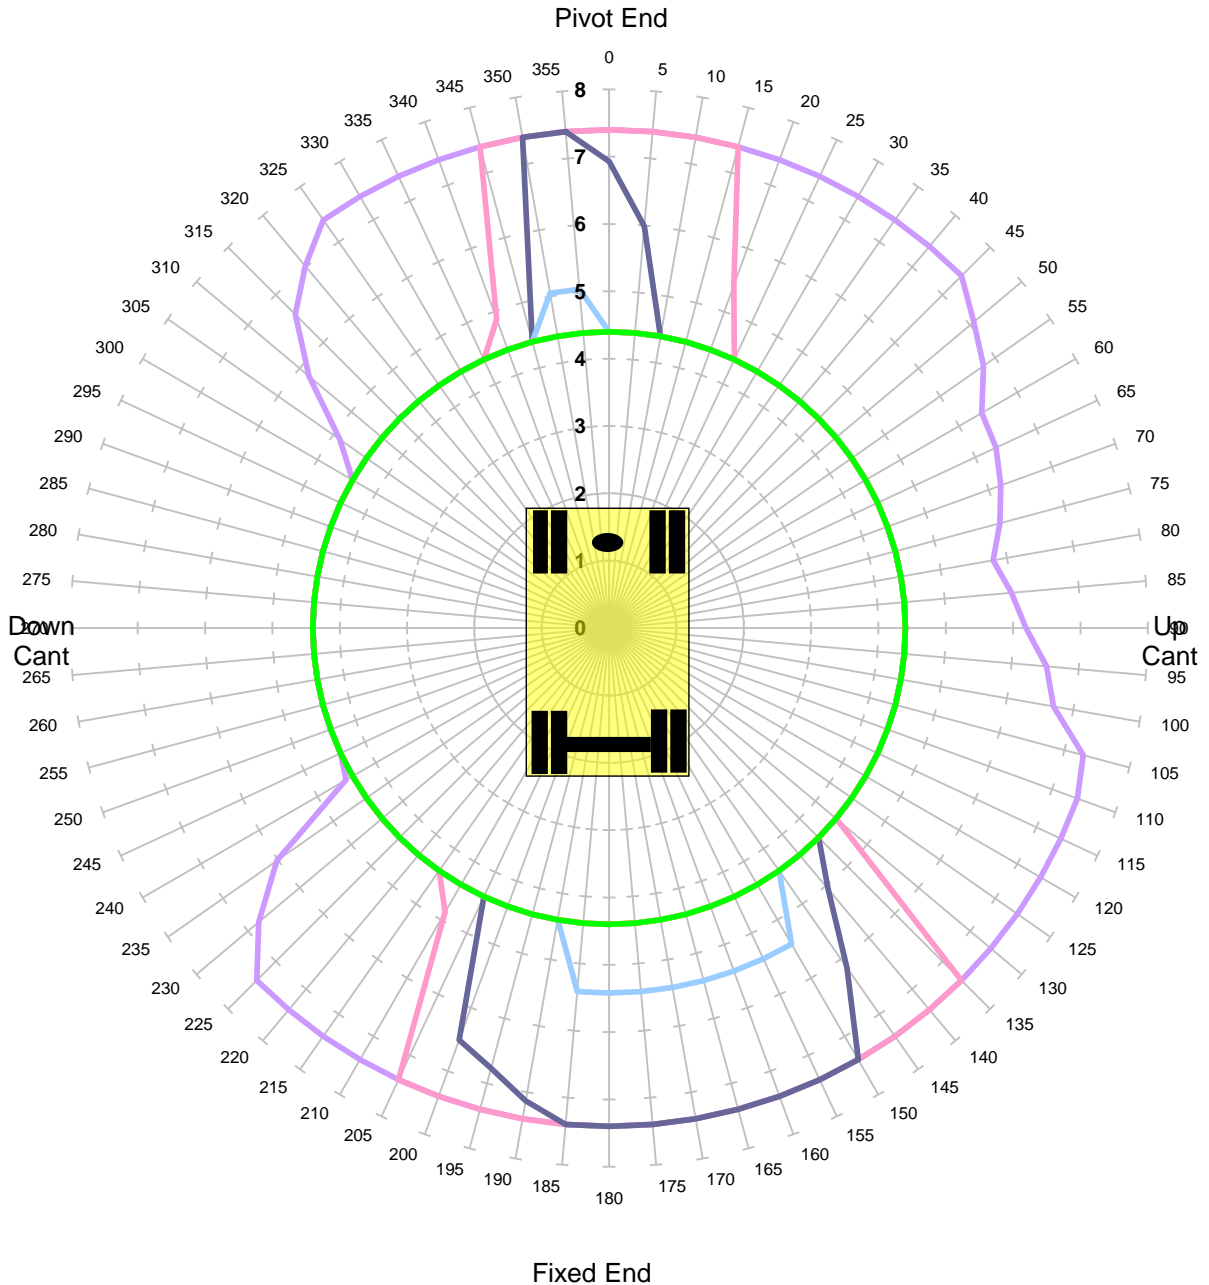


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	67.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift BP**  
**Unlocked Rail Cant 150mm**

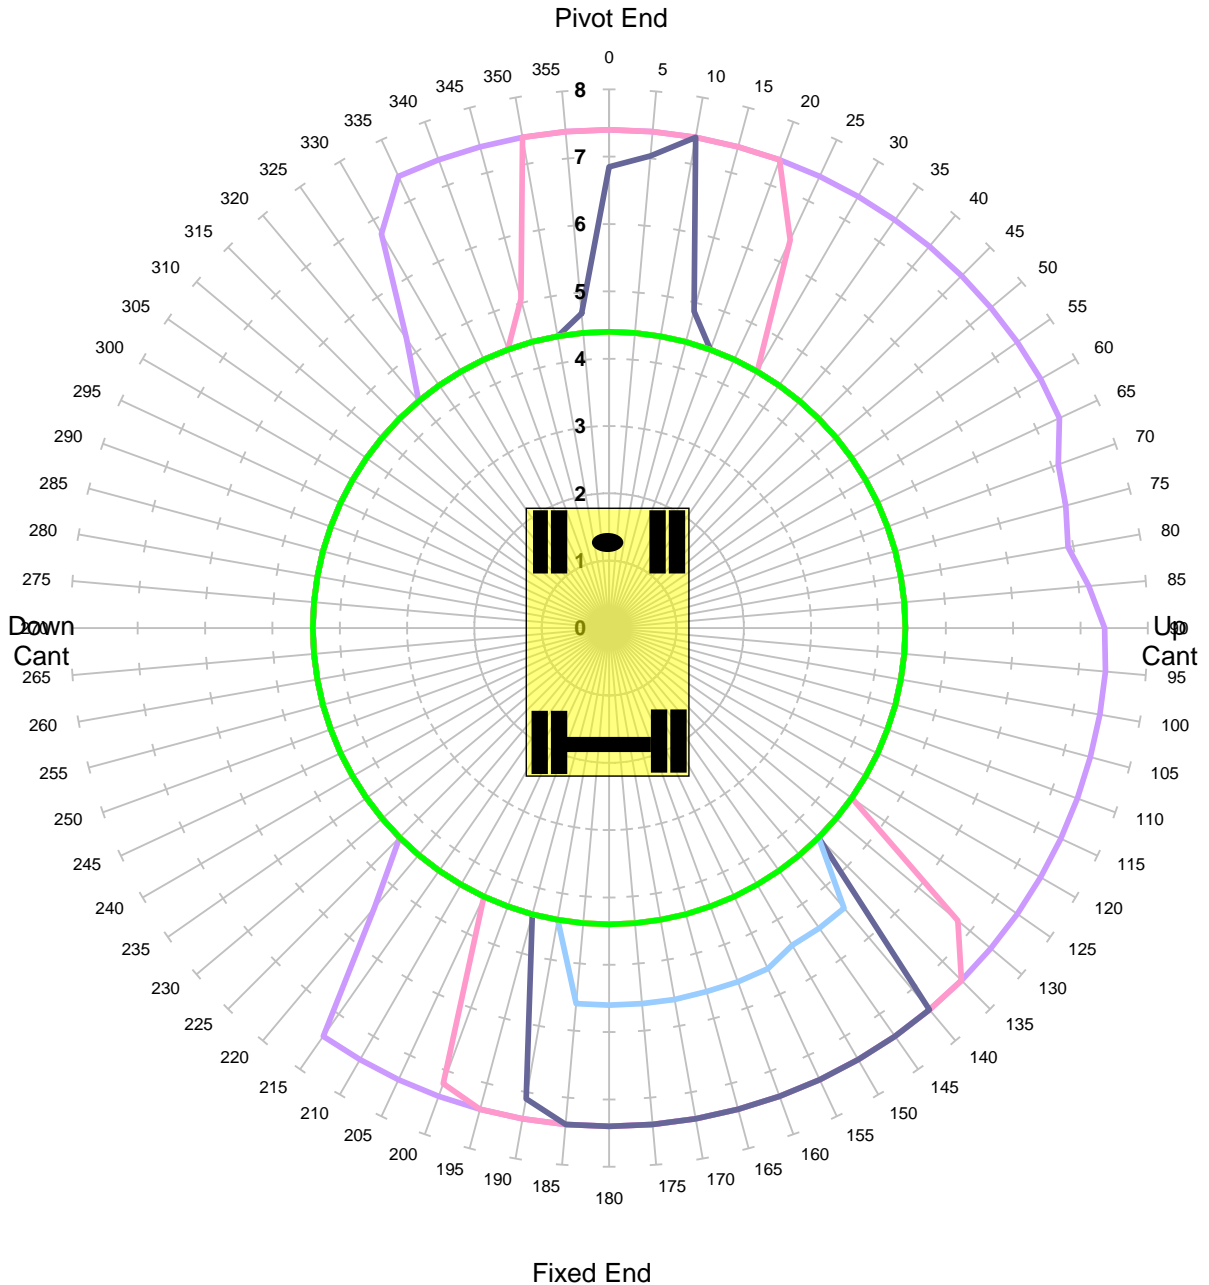


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	67.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift BP**  
**Locked Rail Cant -150mm**

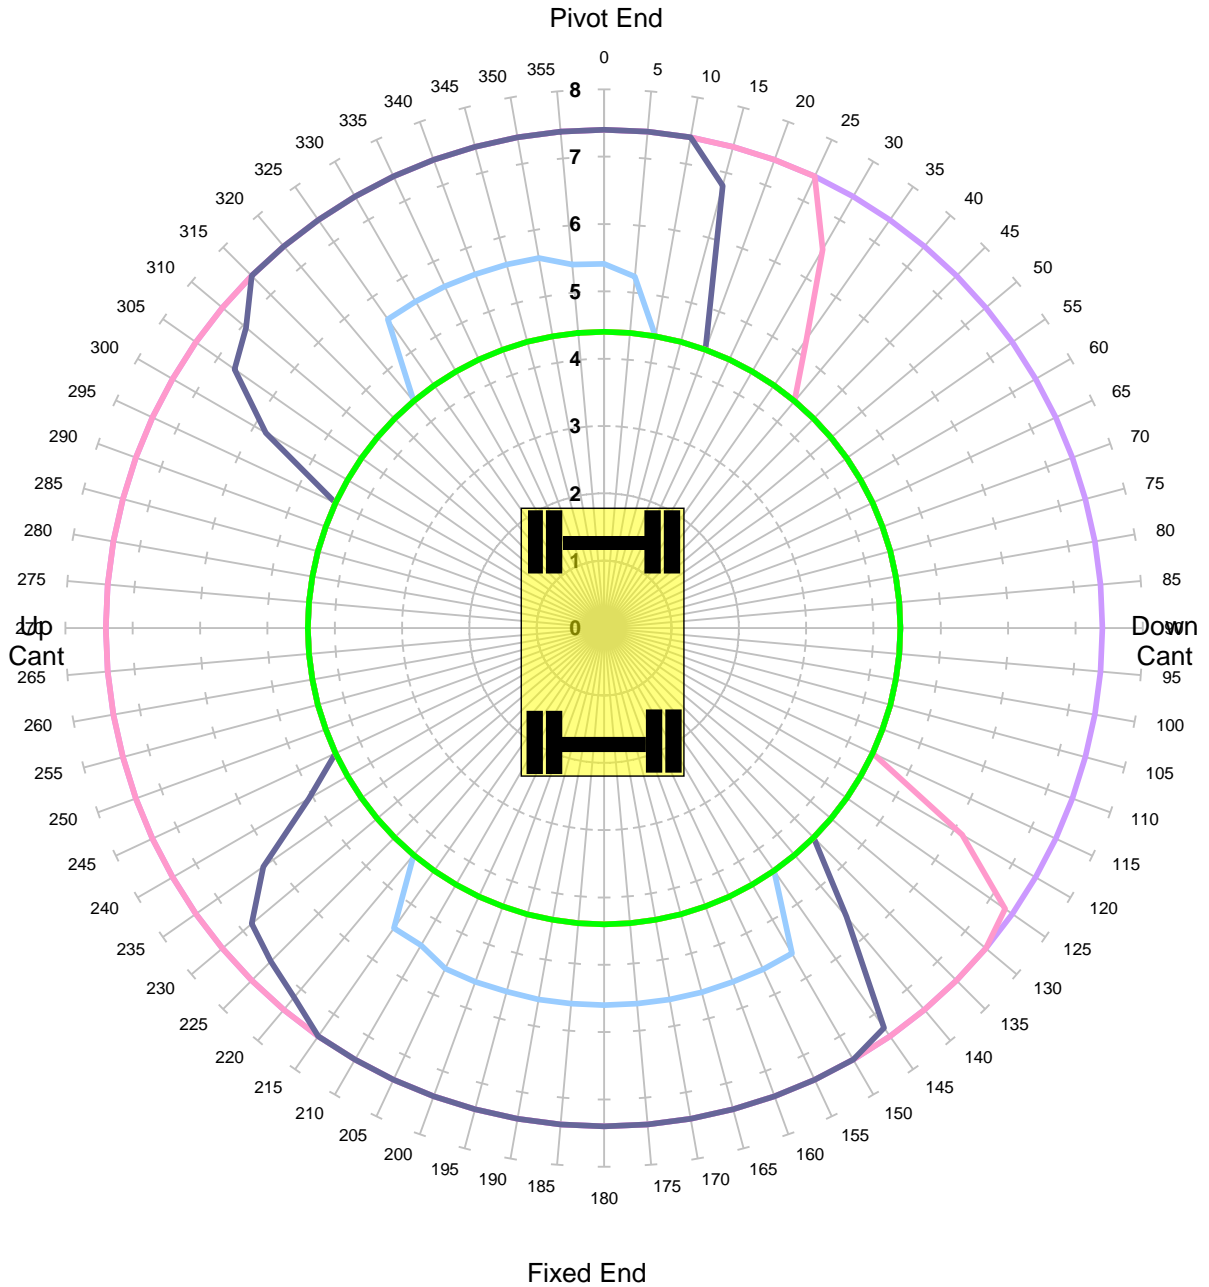


Units in Tonnes

- 1   
 — 2   
 — 3   
 — 4   
 — 5   
 — 6   
 — 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	90.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift BP**  
**Locked Rail Cant -50mm**

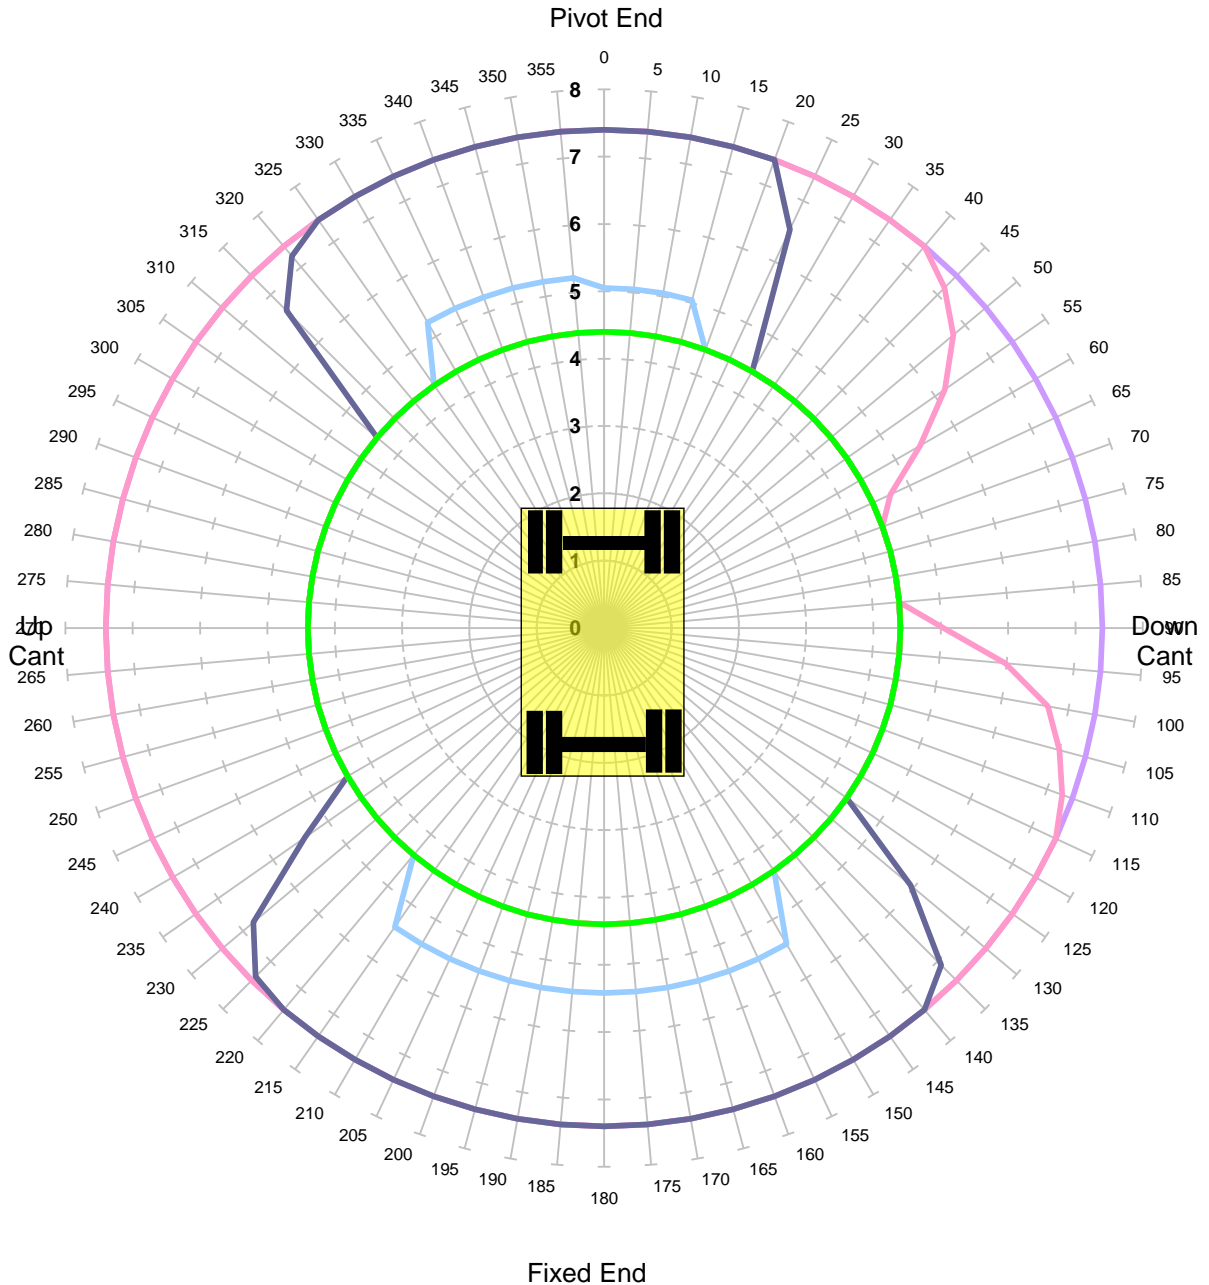


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	90.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift BP**  
**Locked Rail Cant 50mm**

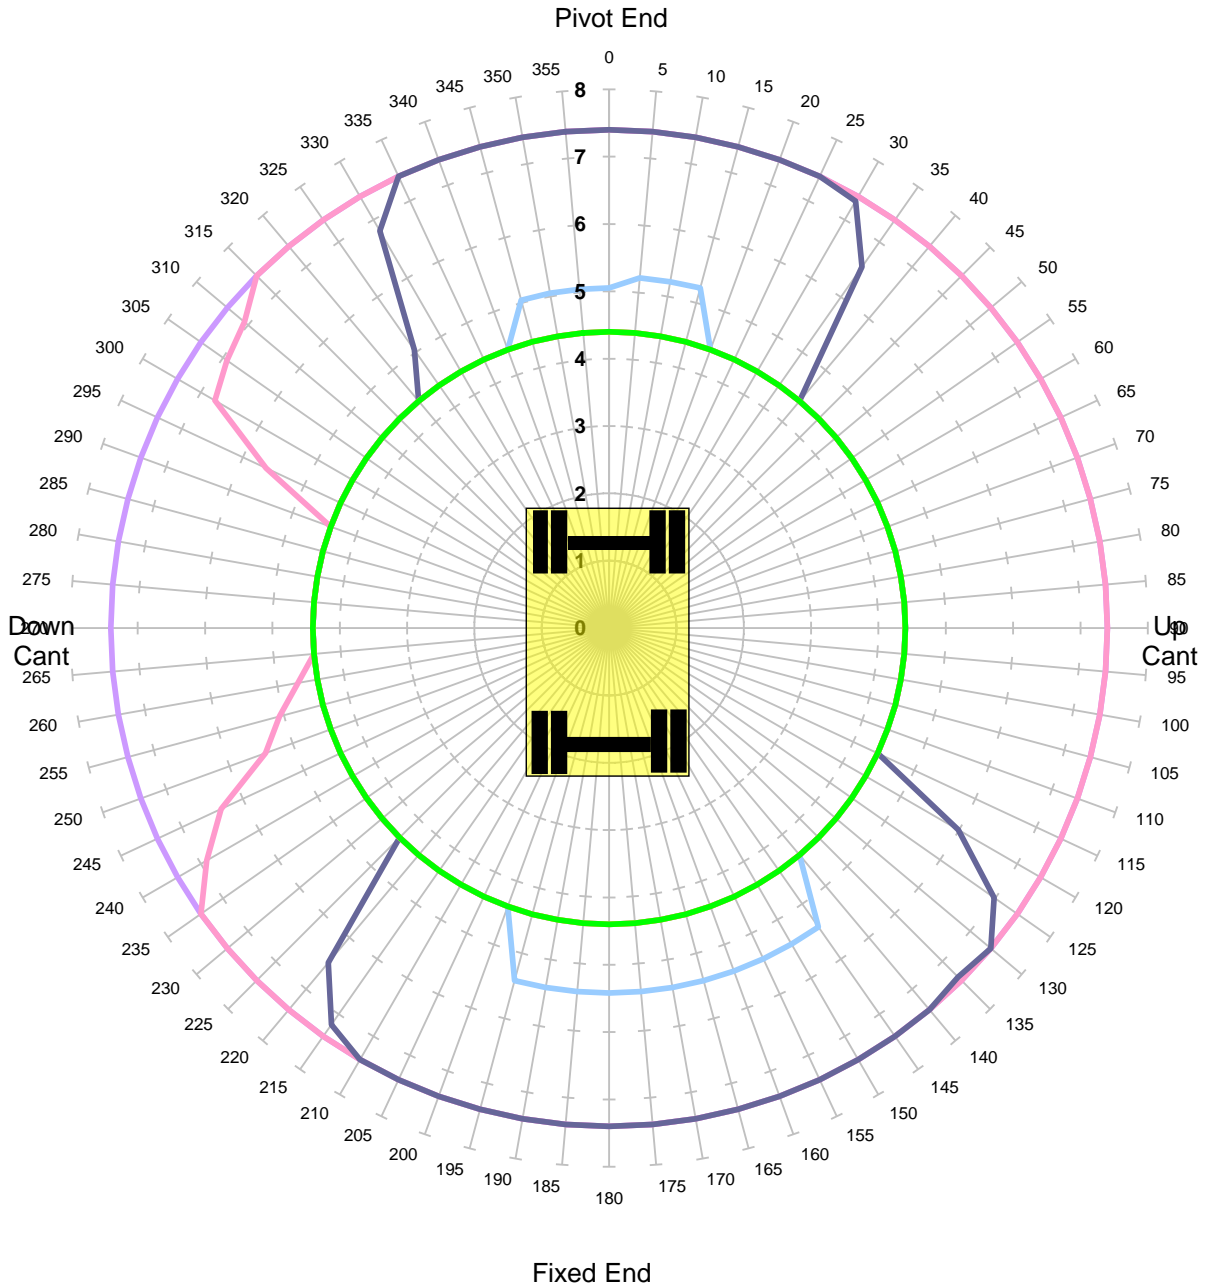

Units in Tonnes


- 1   
 — 2   
 — 3   
 — 4   
 — 5   
 — 6   
 — 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	90.0%
<b>COMMENT:</b>			





**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift BP**  
**Locked Rail Cant 150mm**

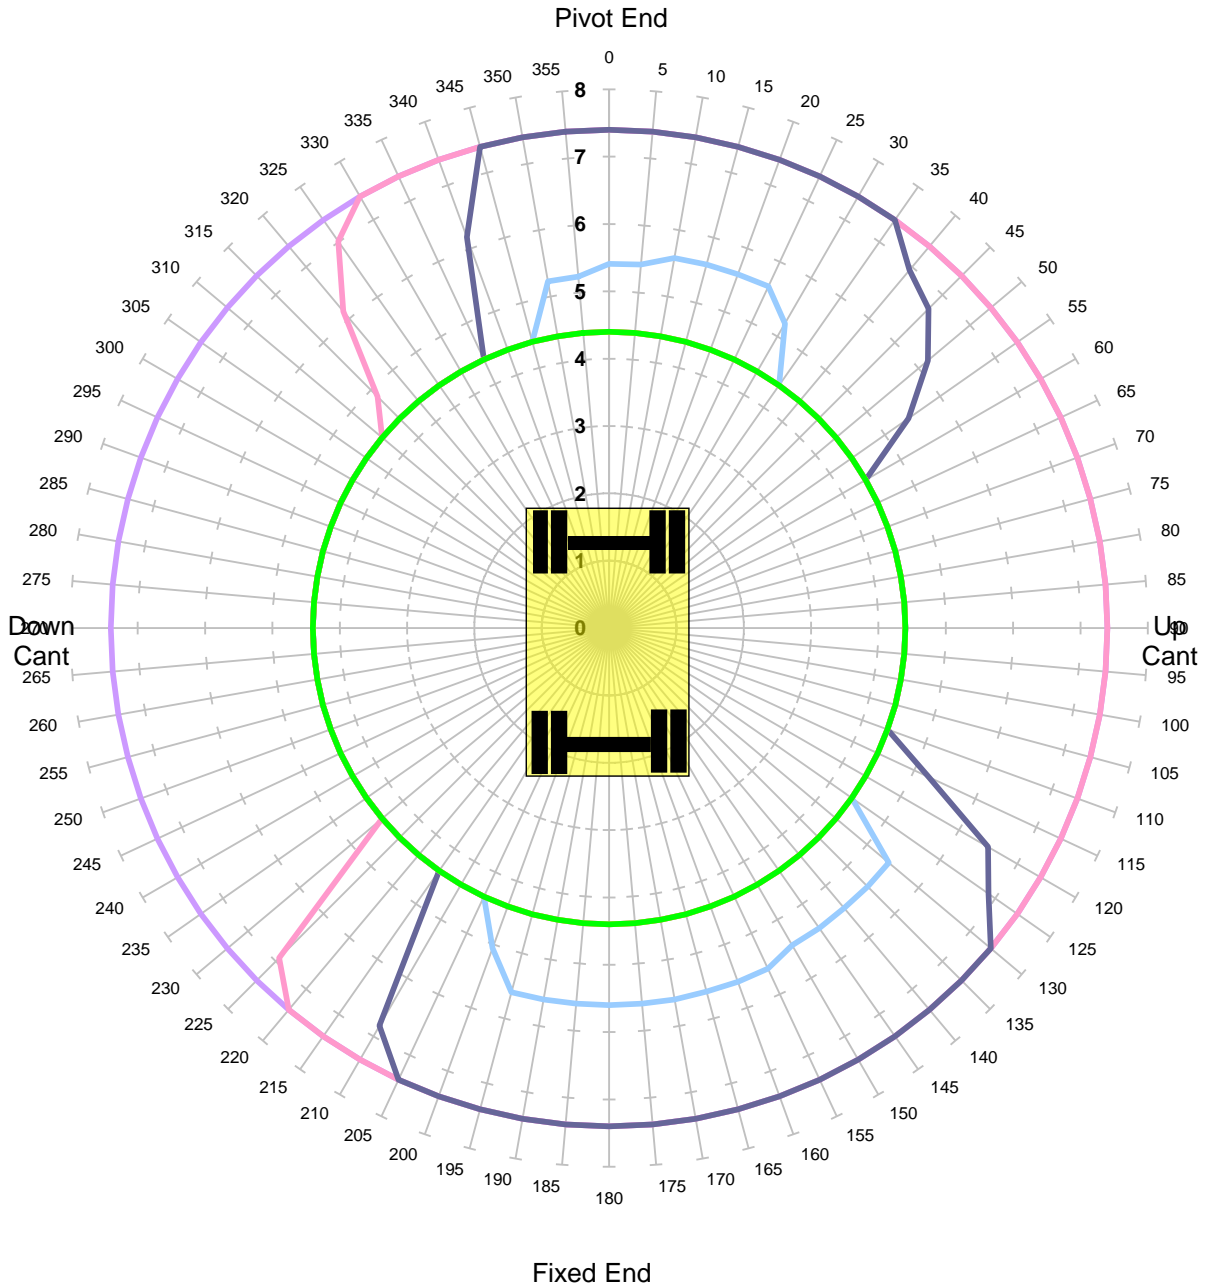

Units in Tonnes


- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	90.0%
<b>COMMENT:</b>			





**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Level Ground Height 2m Lift BP**  
Unlocked Road

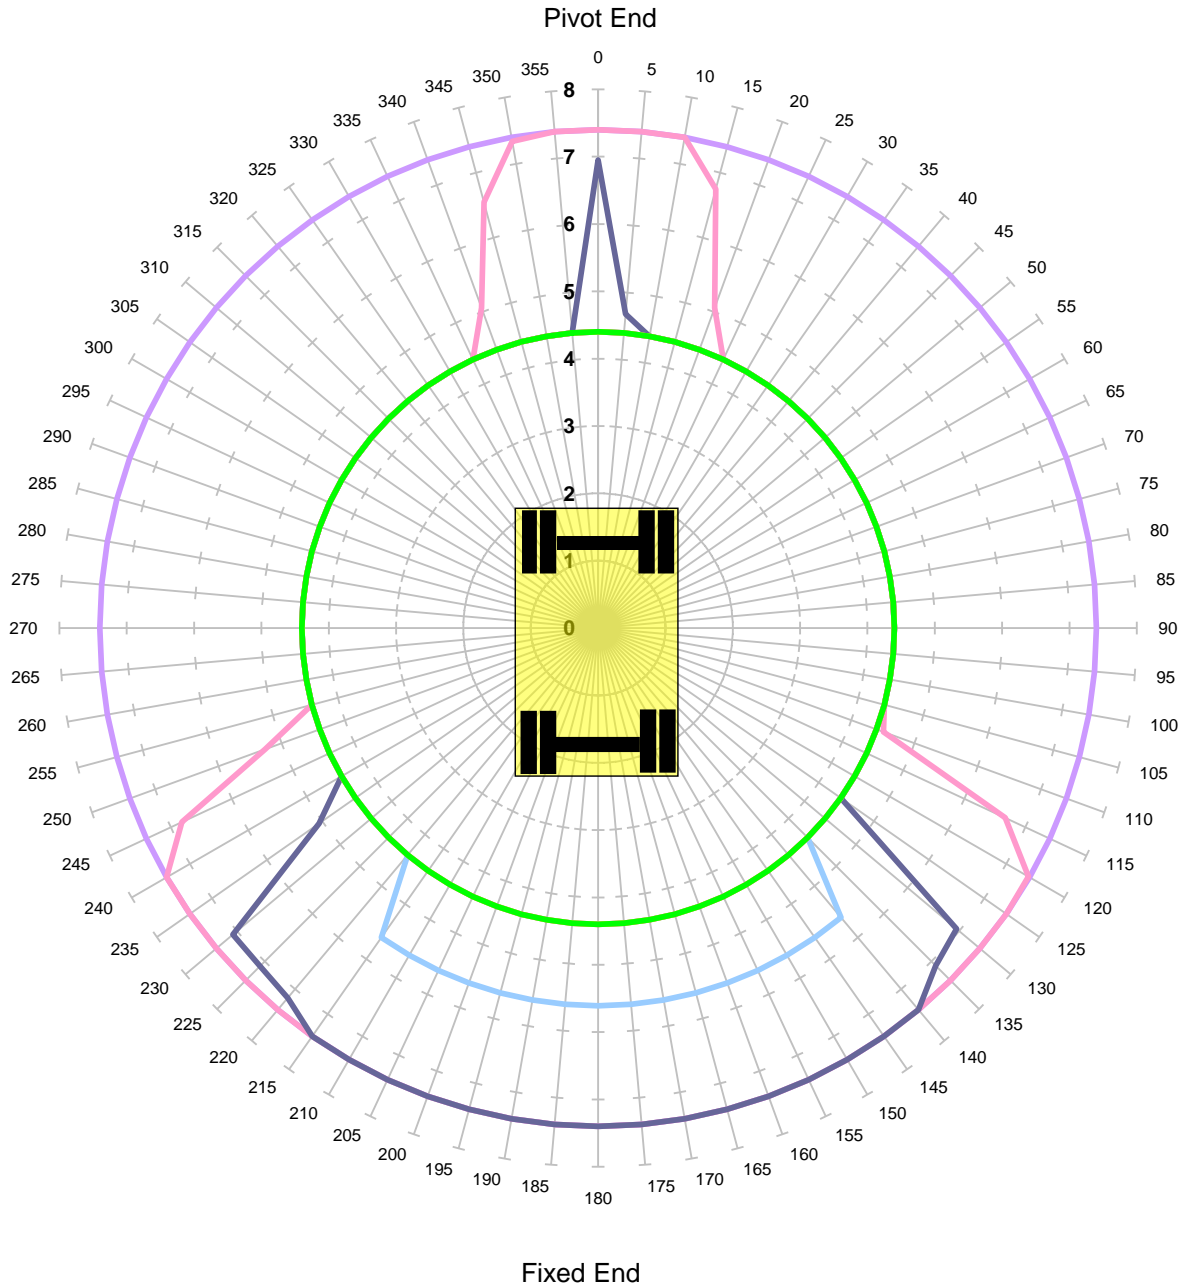


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	71.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Level Ground Height 2m Lift BP**  
Locked Road

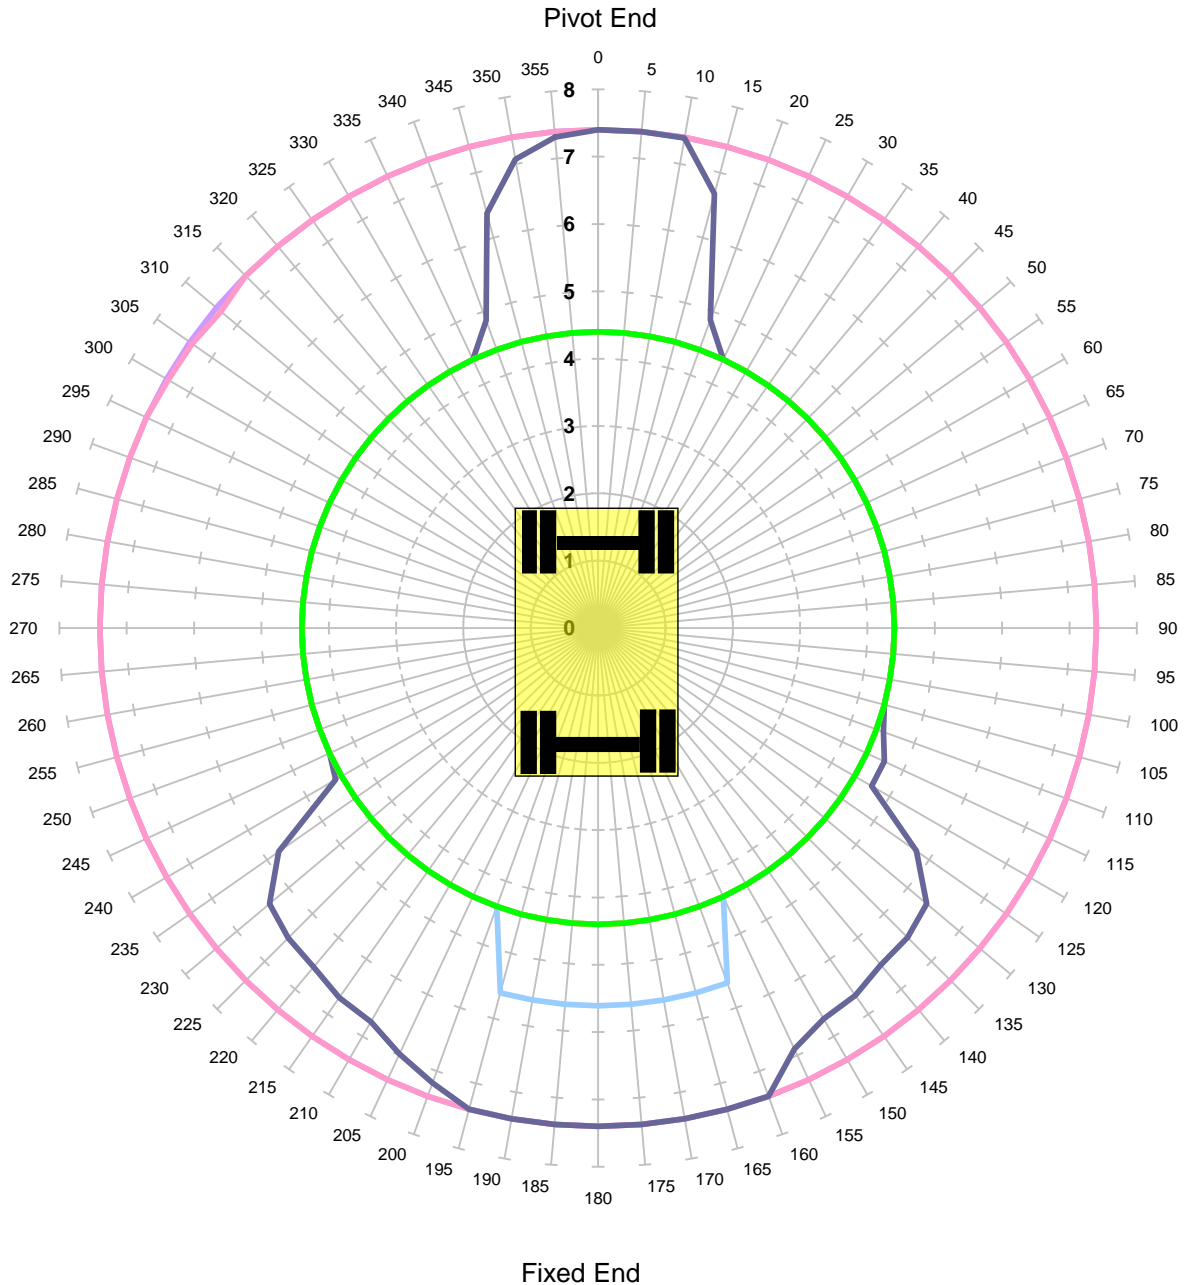


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	71.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift BP**  
**Unlocked Rail Cant -150mm - Tandem Lift**

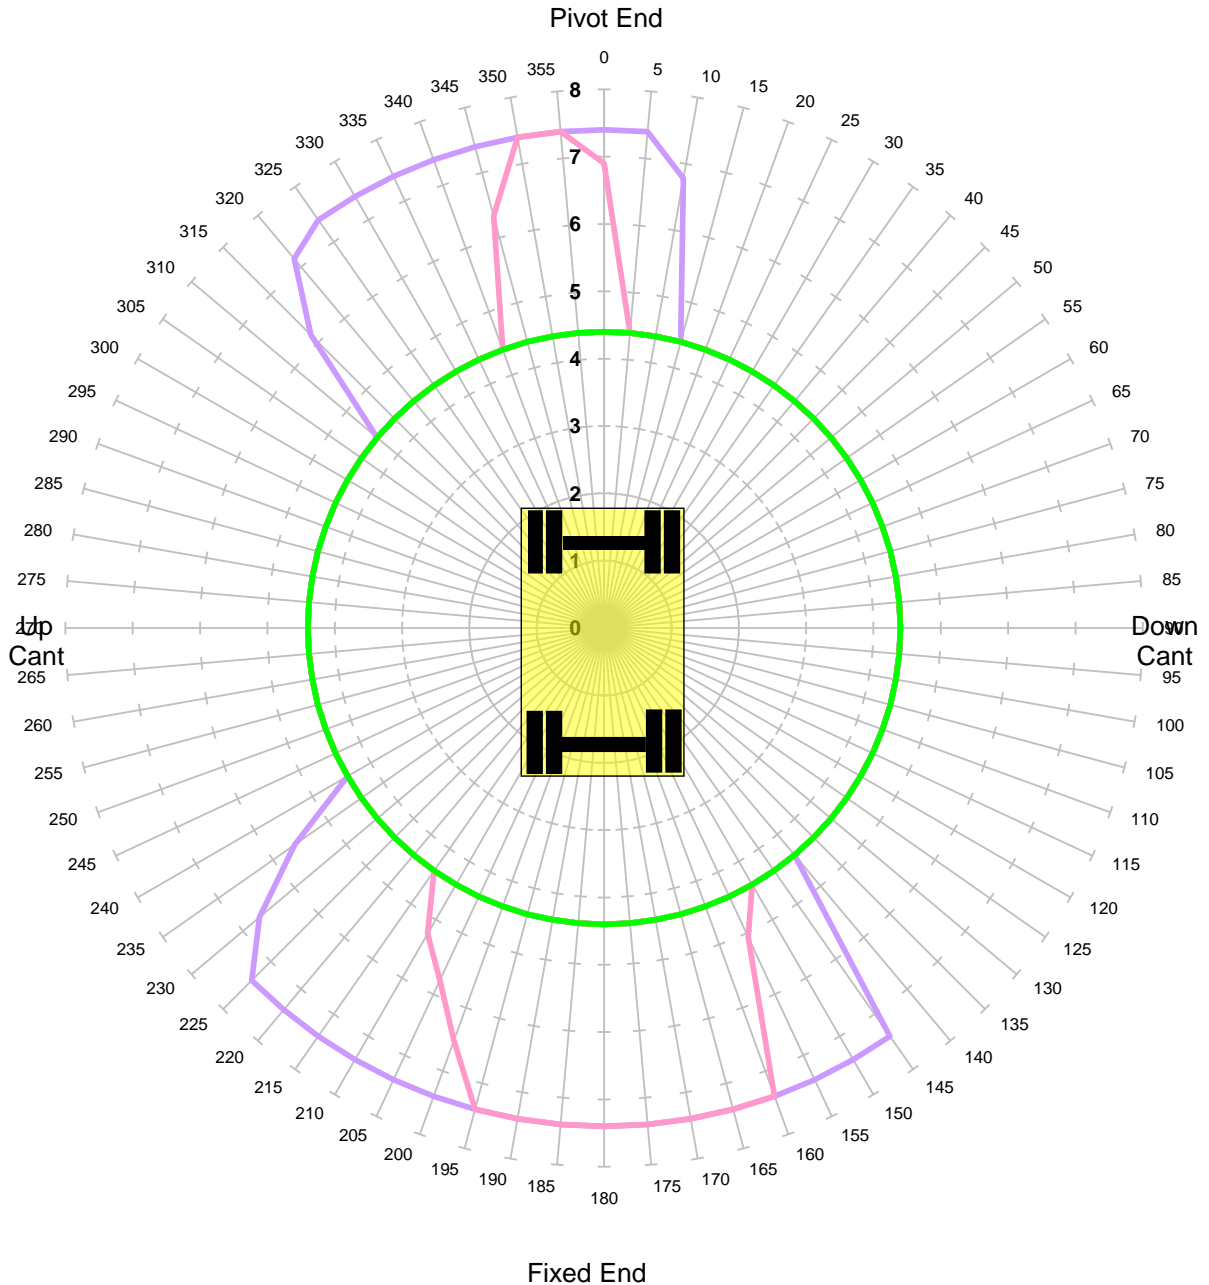


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	44.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift BP**  
**Unlocked Rail Cant -50mm - Tandem Lift**

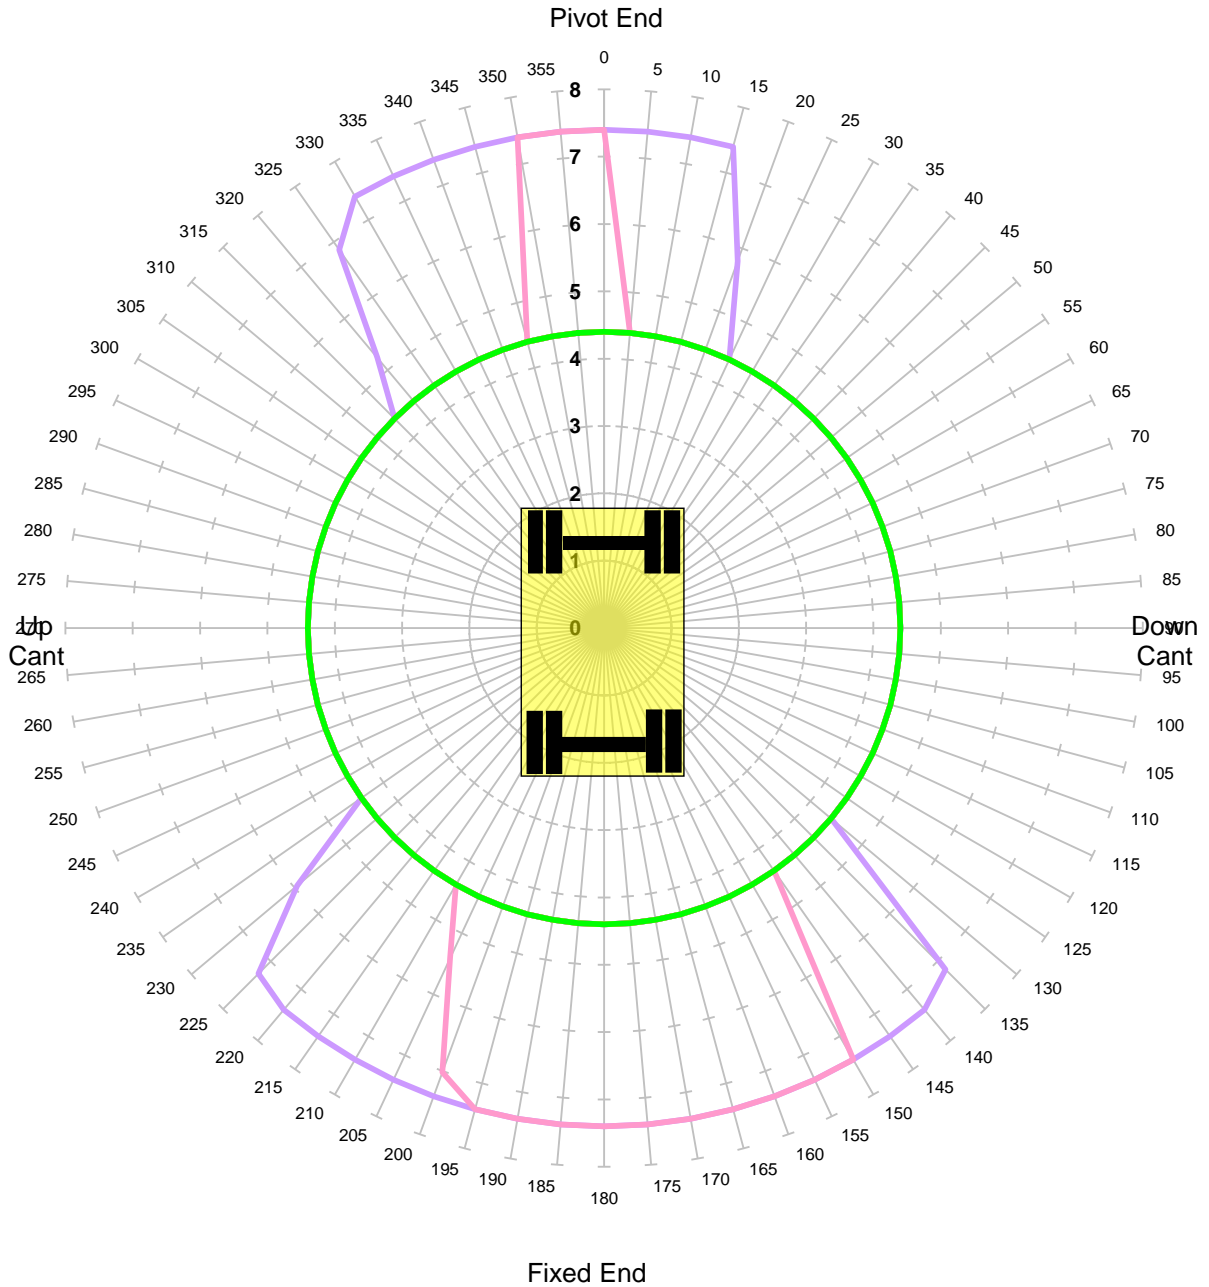


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	44.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift BP**  
**Unlocked Rail Cant 50mm - Tandem Lift**

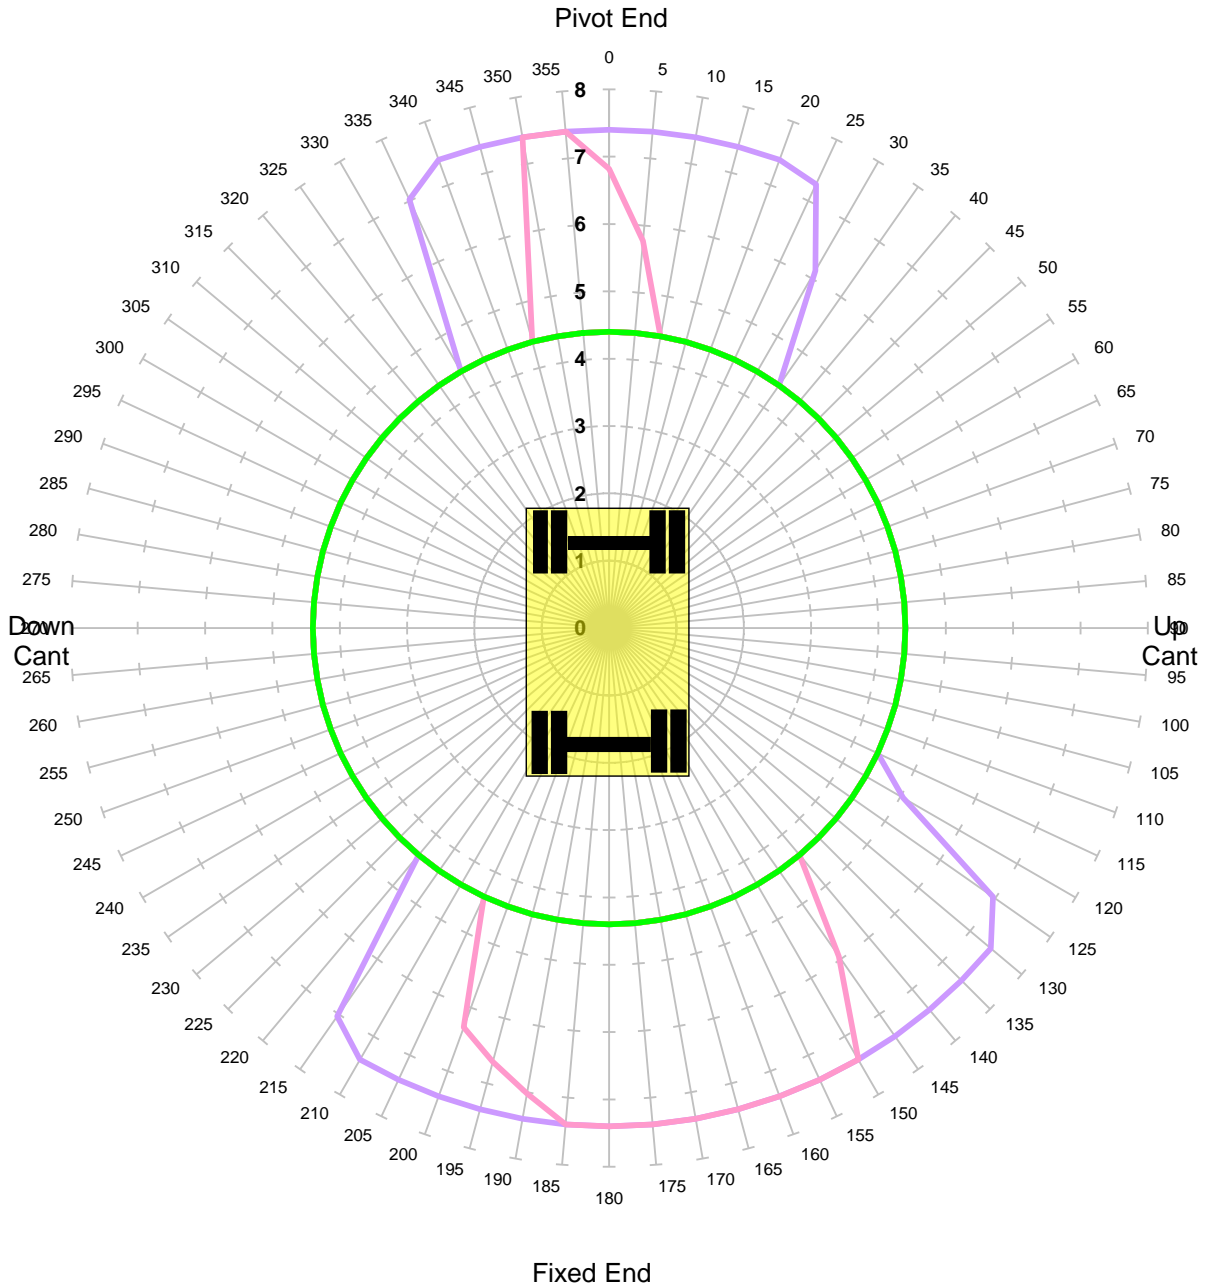


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	44.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift BP**  
**Unlocked Rail Cant 150mm - Tandem Lift**

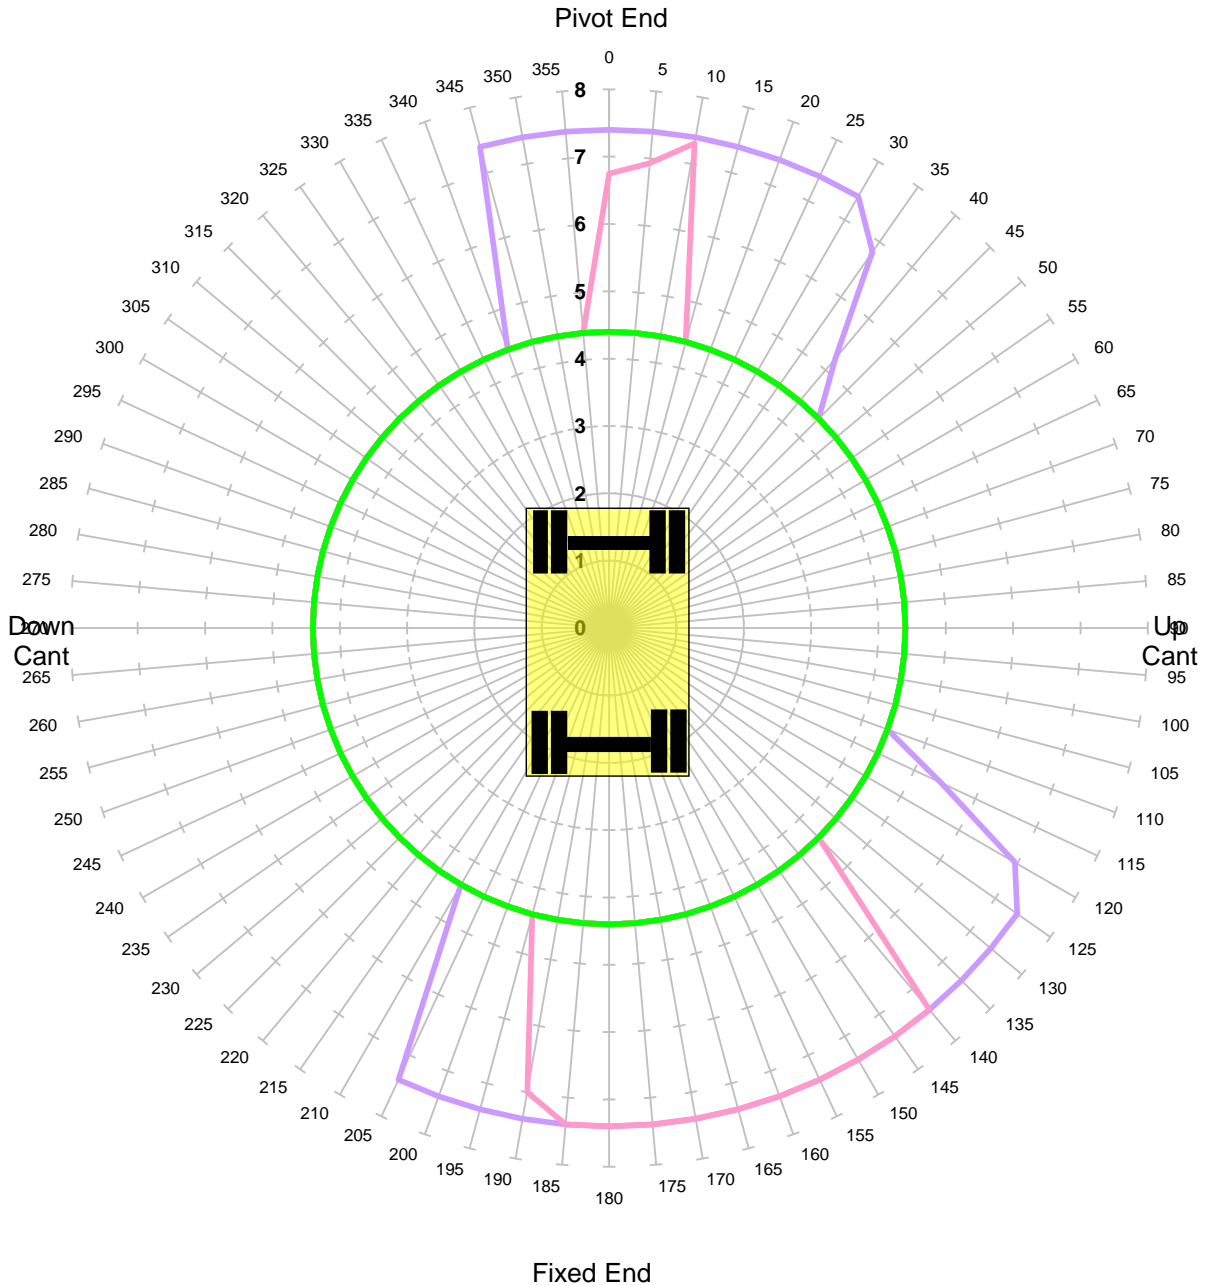

Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	44.0%
<b>COMMENT:</b>			




**KING TRANSPORT EQUIPMENT LTD**

**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**

**Gradient 1 in -25 Height 2m Lift BP**

**Locked Rail Cant -150mm - Tandem Lift**

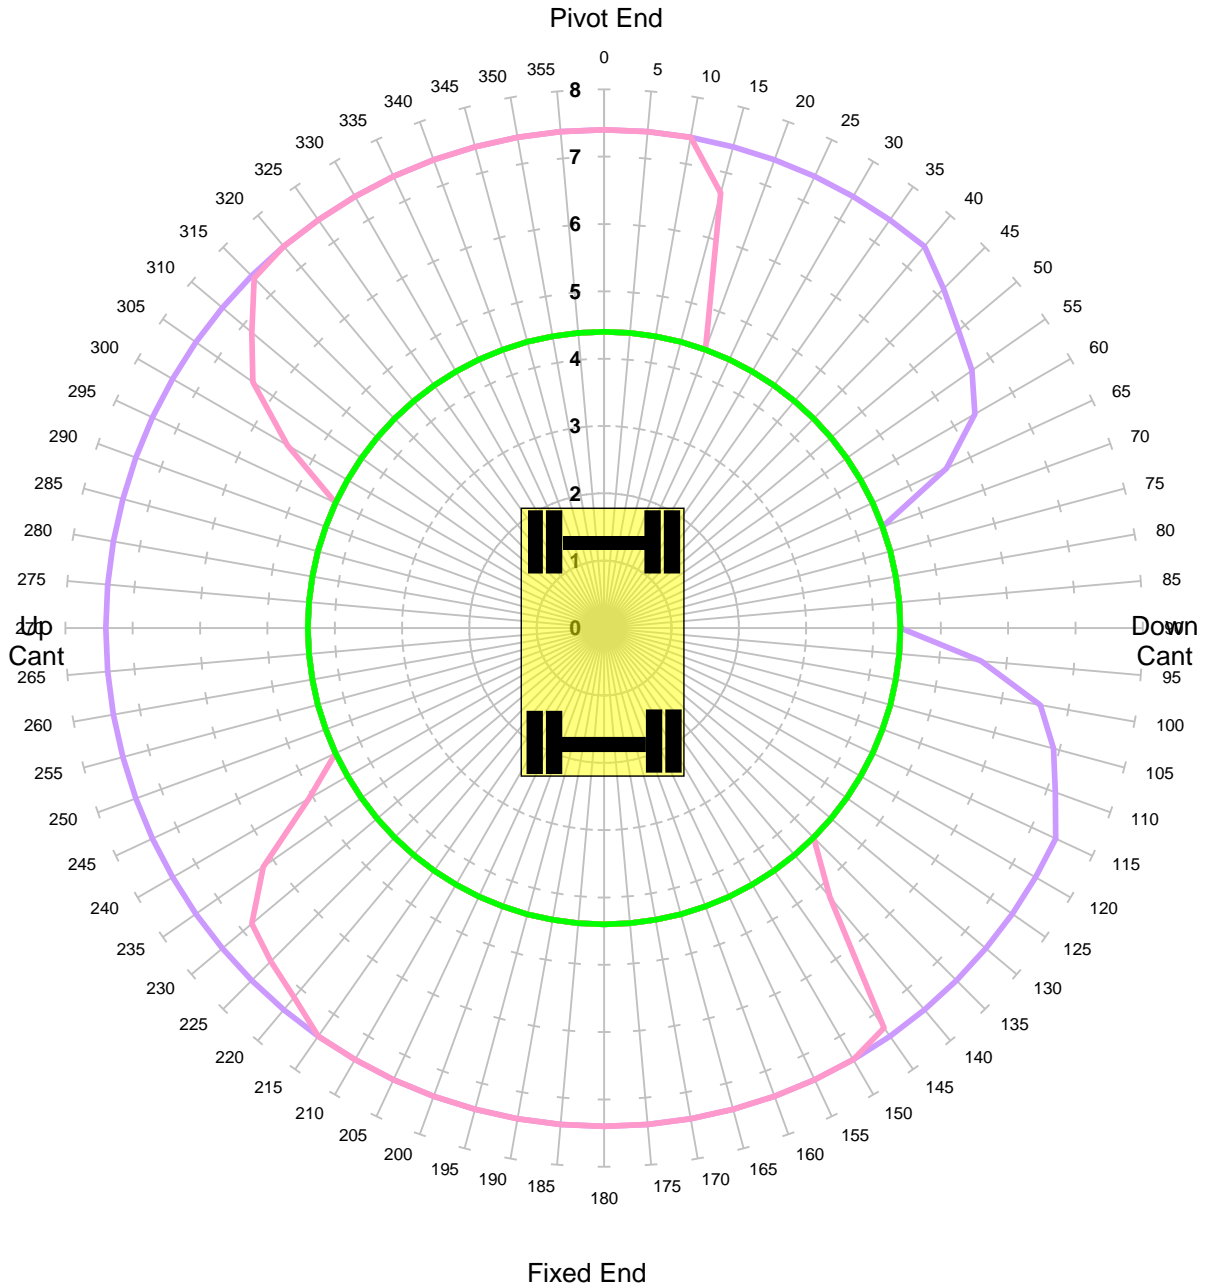

Units in Tonnes


- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	59.0%
<b>COMMENT:</b>			





**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift BP**  
**Locked Rail Cant -50mm - Tandem Lift**

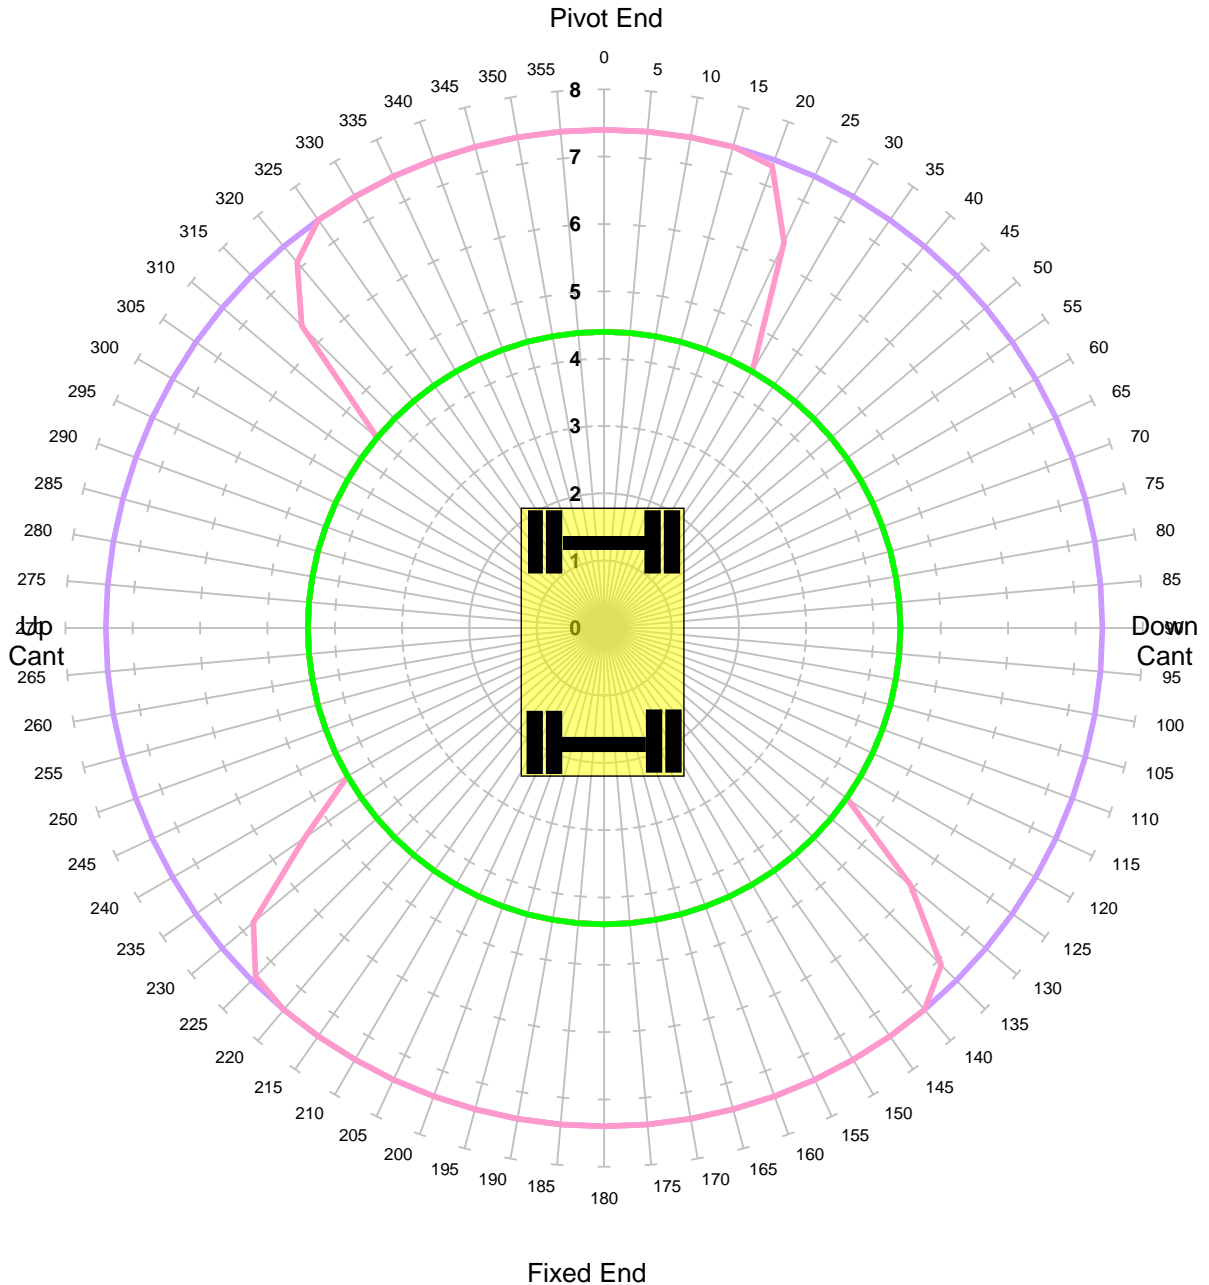


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	59.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift BP**  
**Locked Rail Cant 50mm - Tandem Lift**

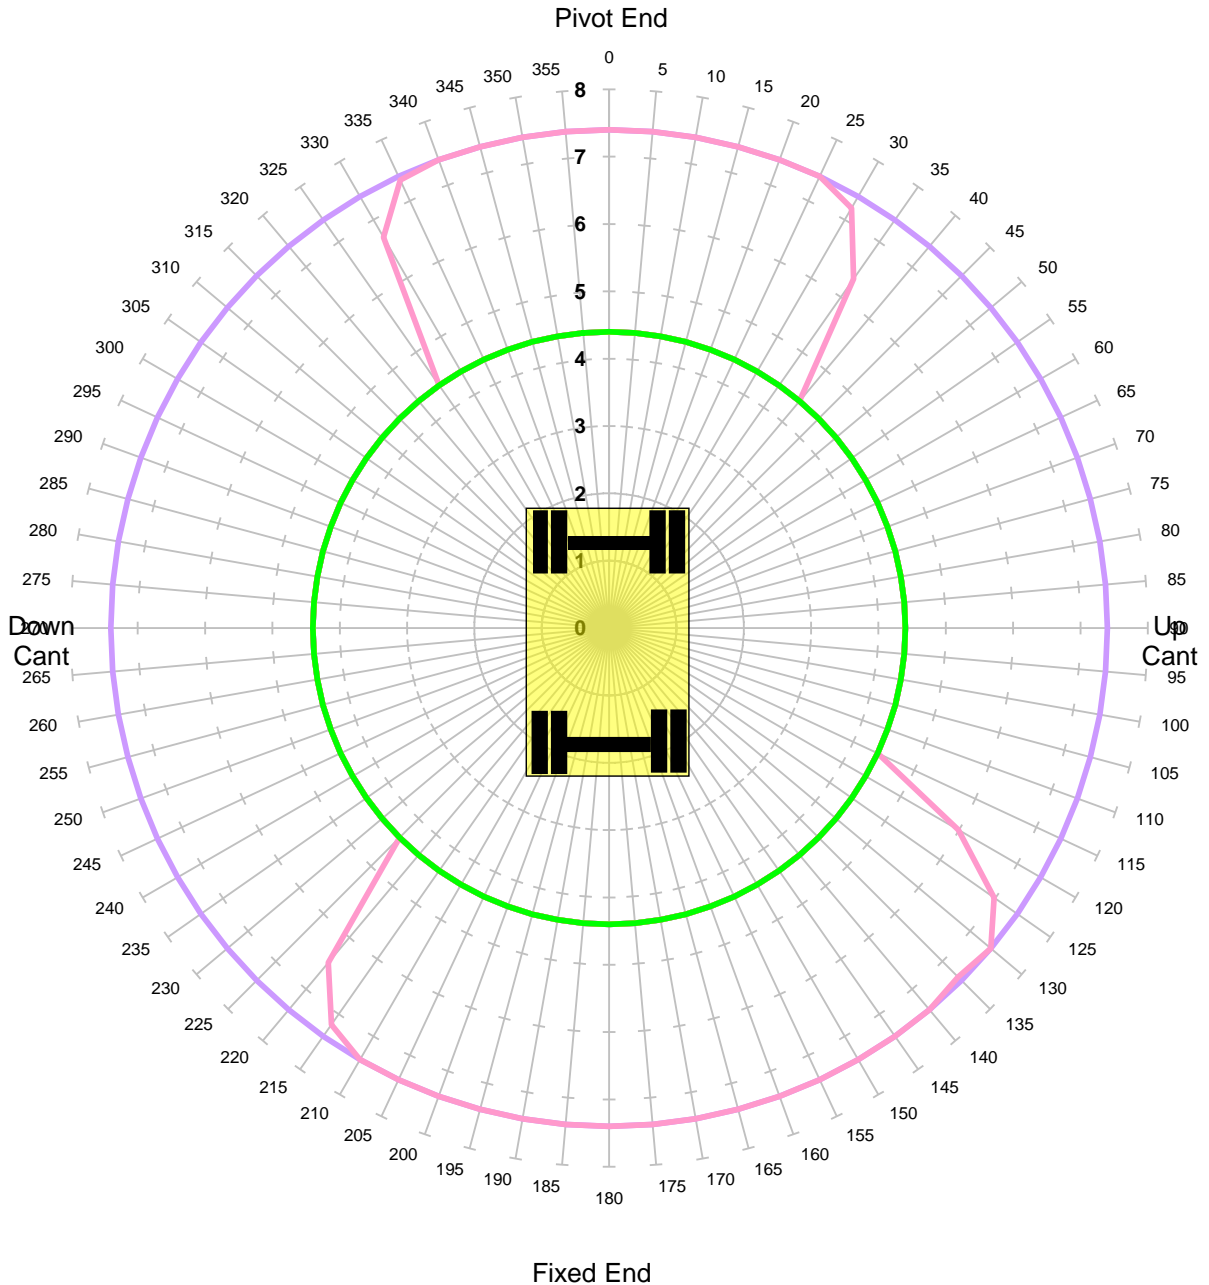


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	59.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift BP**  
**Locked Rail Cant 150mm - Tandem Lift**

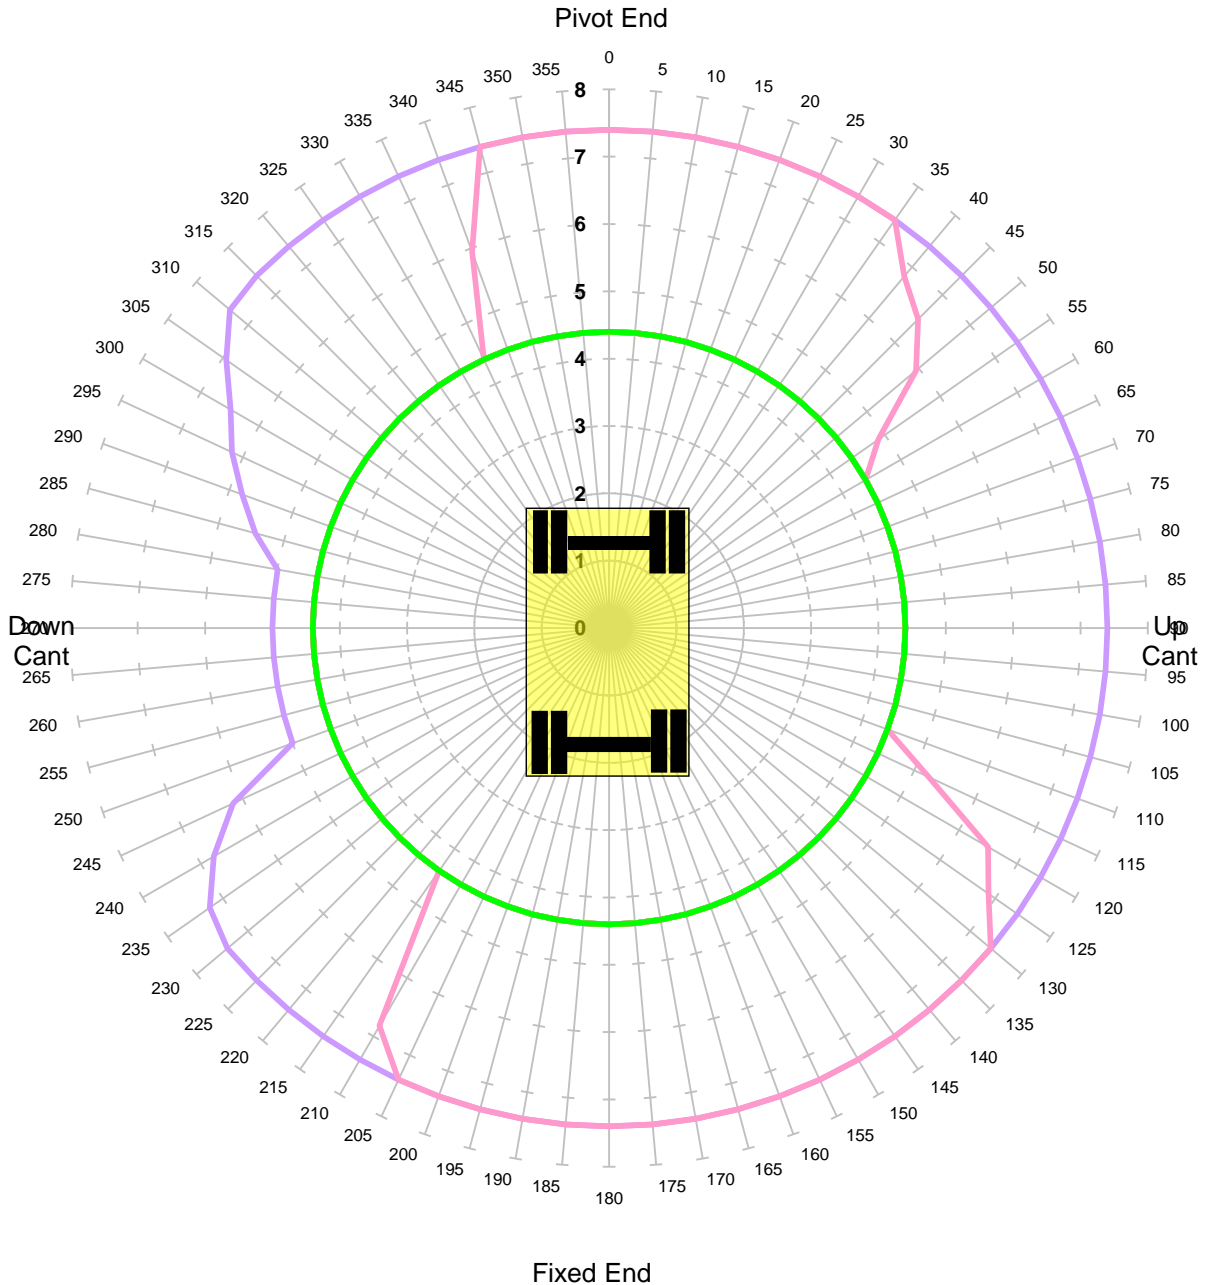


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	59.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Level Ground Height 2m Lift BP**  
**Unlocked Road - Tandem Lift**

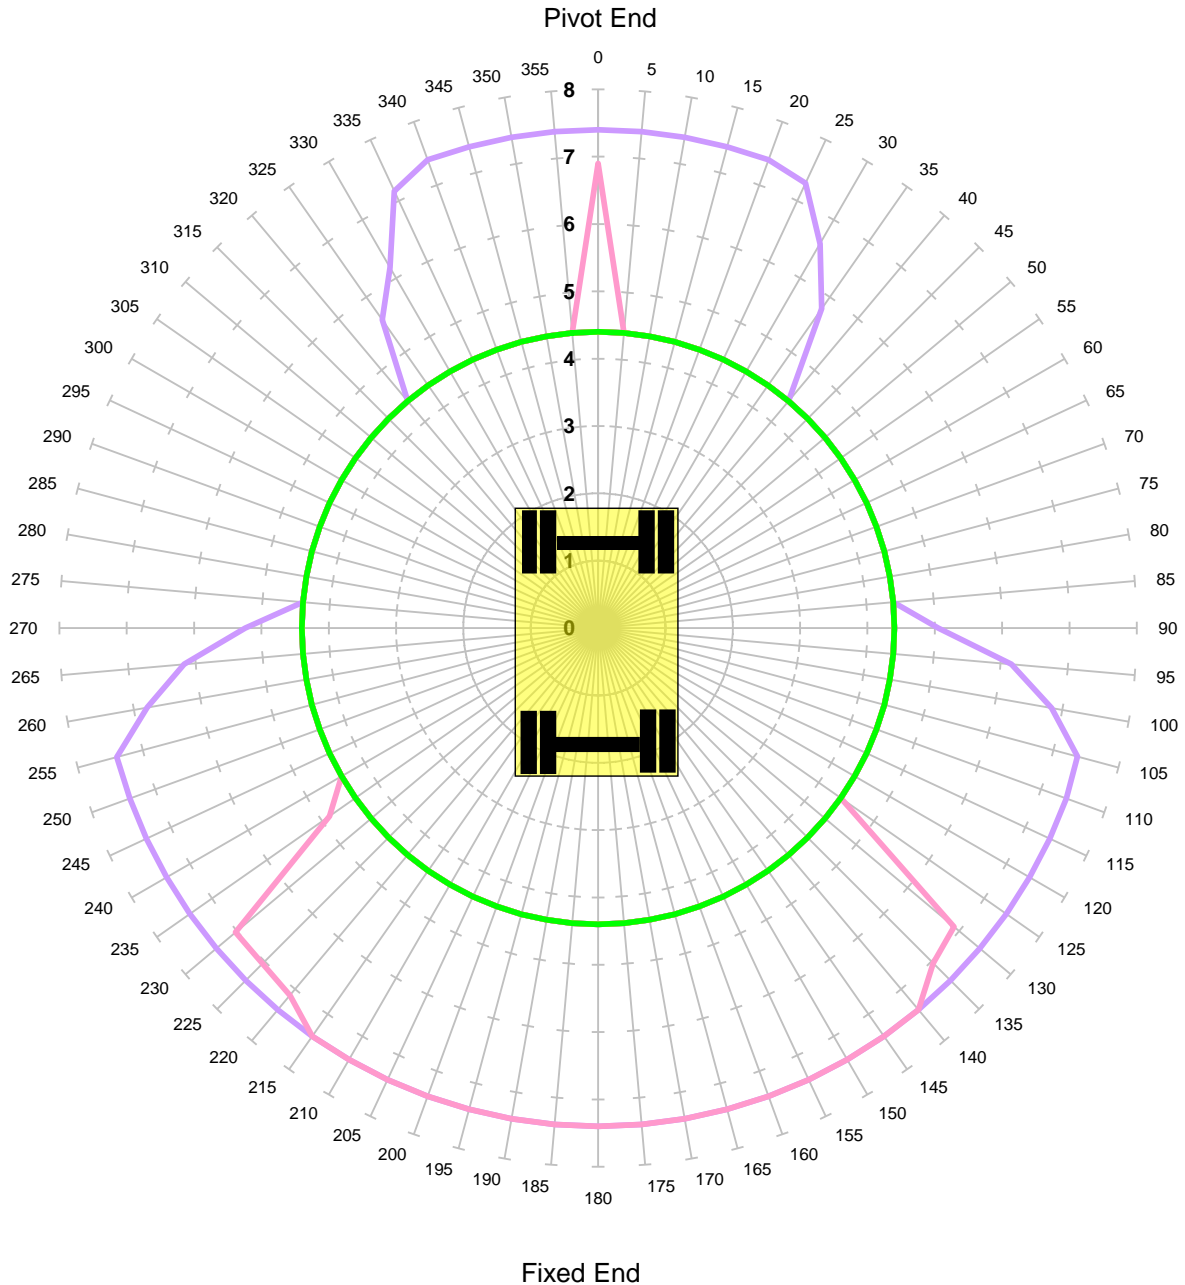


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	47.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Level Ground Height 2m Lift BP**  
**Locked Road - Tandem Lift**

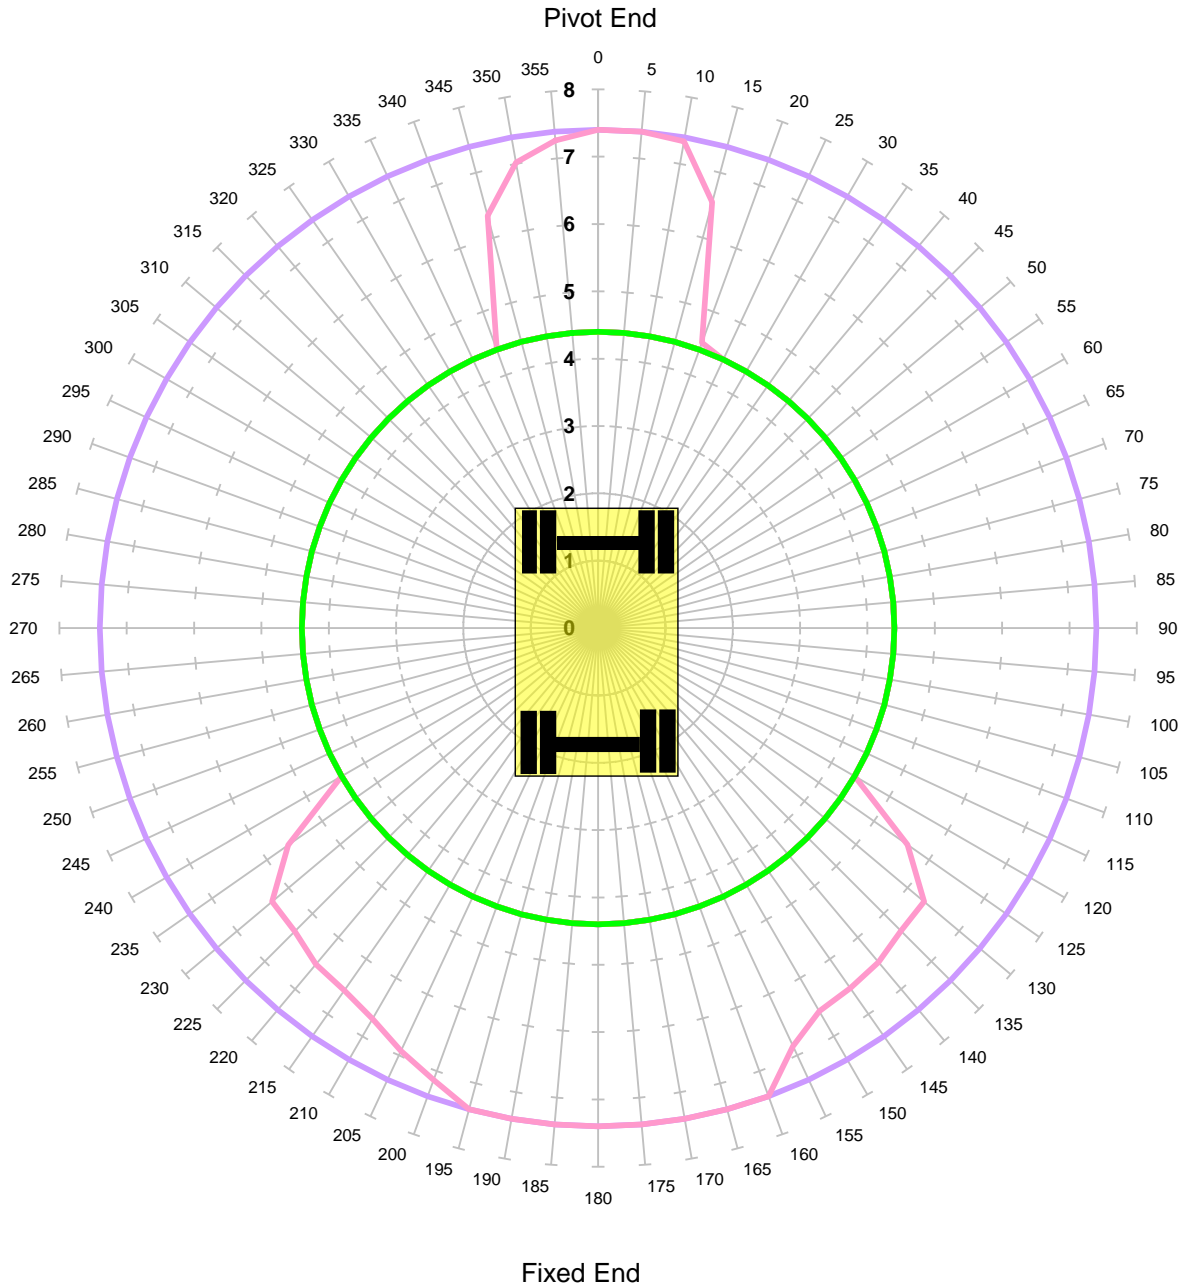


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	47.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift QH**  
**Unlocked Rail Cant -150mm**

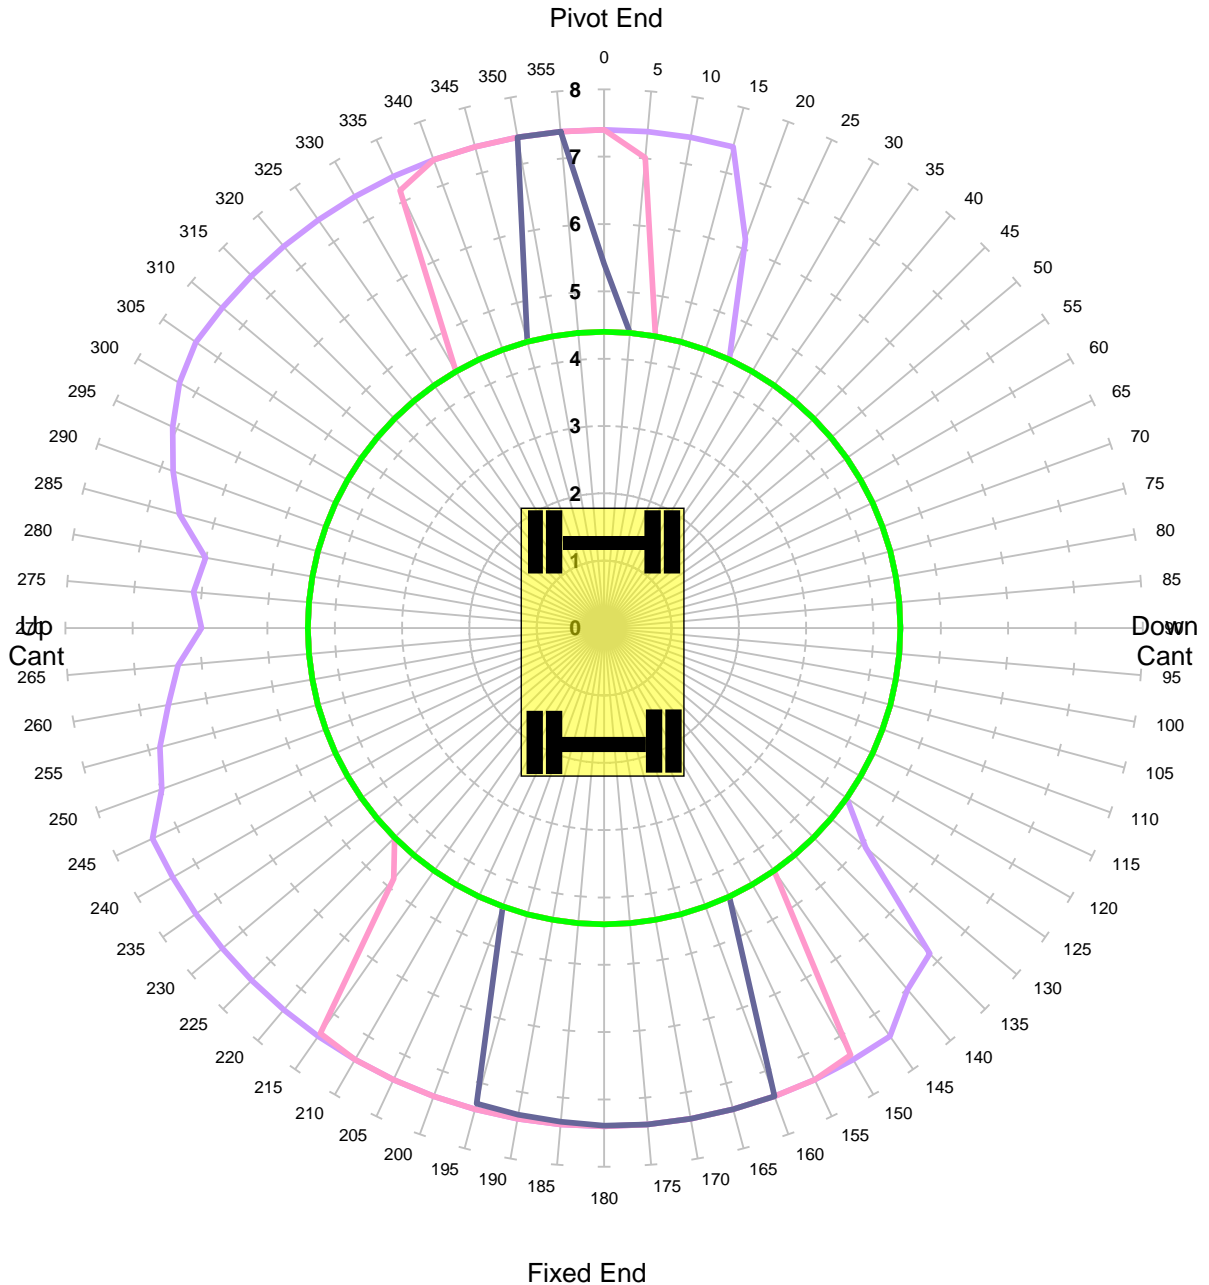


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	67.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift QH**  
**Unlocked Rail Cant -50mm**

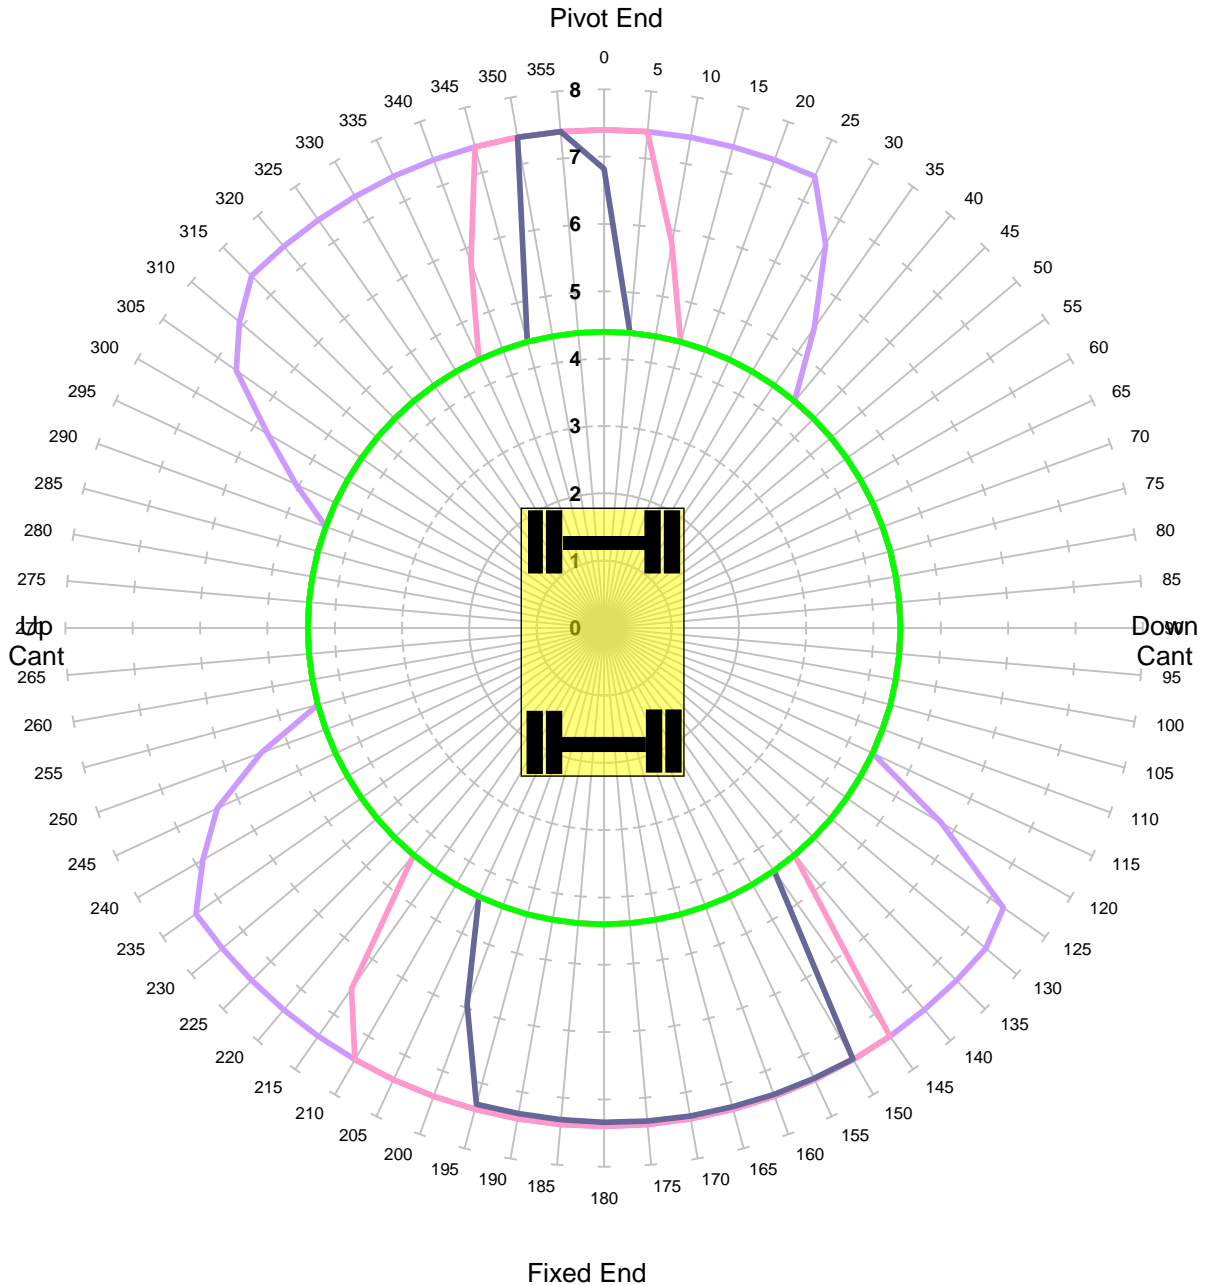

Units in Tonnes


- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	67.0%
<b>COMMENT:</b>			





**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift QH**  
**Unlocked Rail Cant 50mm**

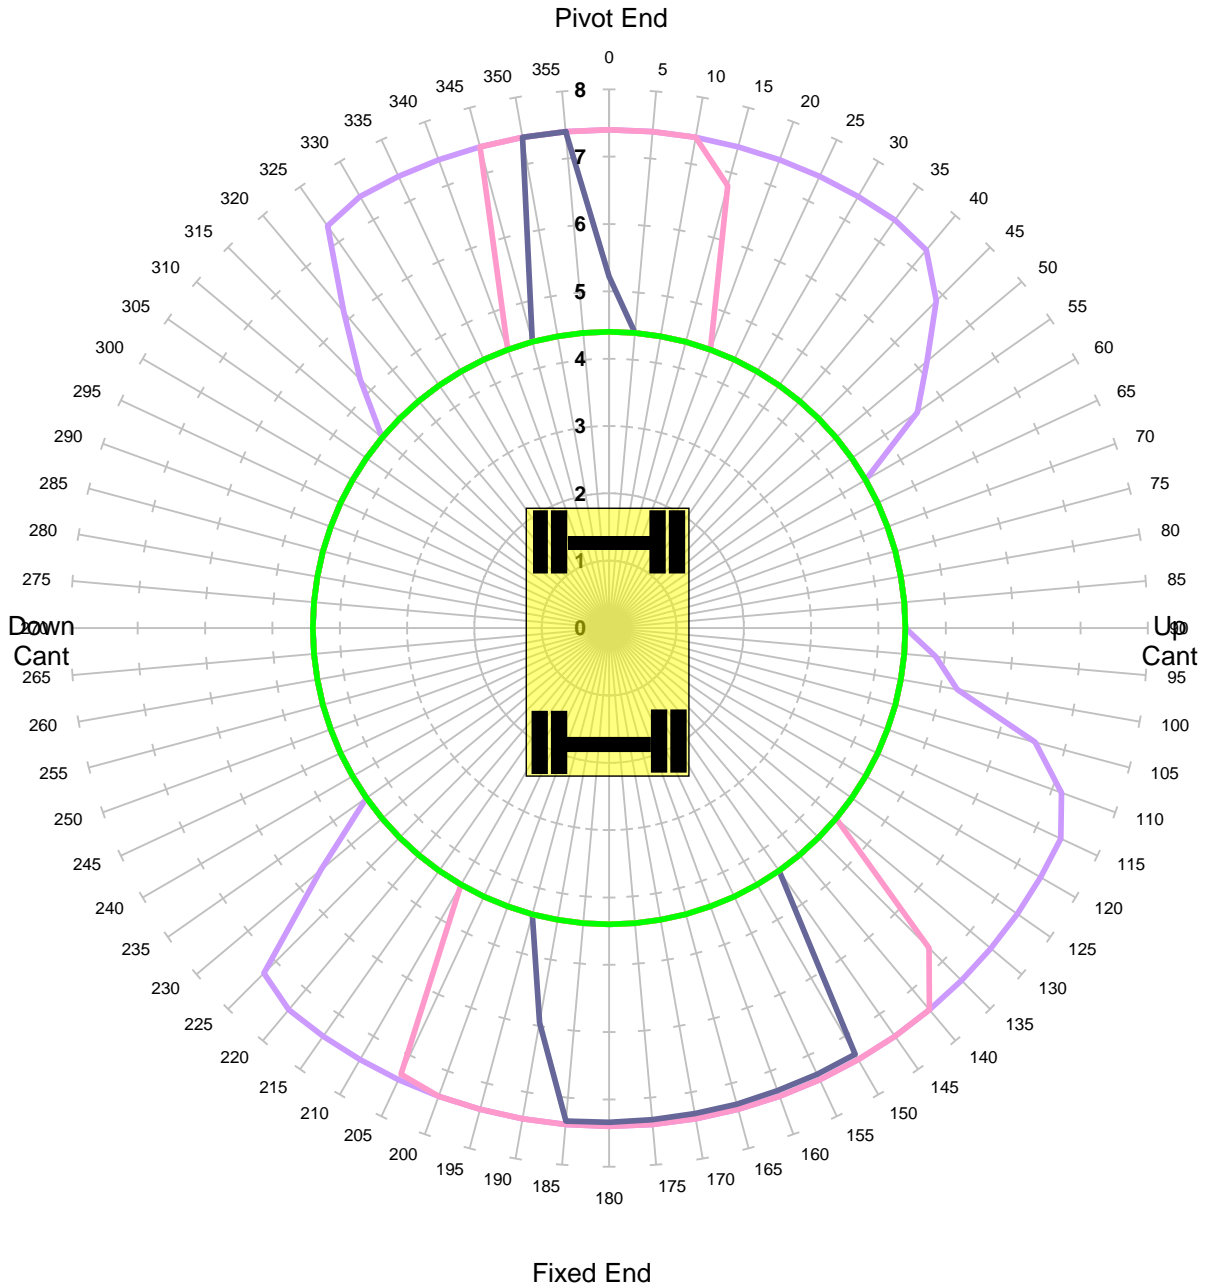


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	67.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift QH**  
**Unlocked Rail Cant 150mm**

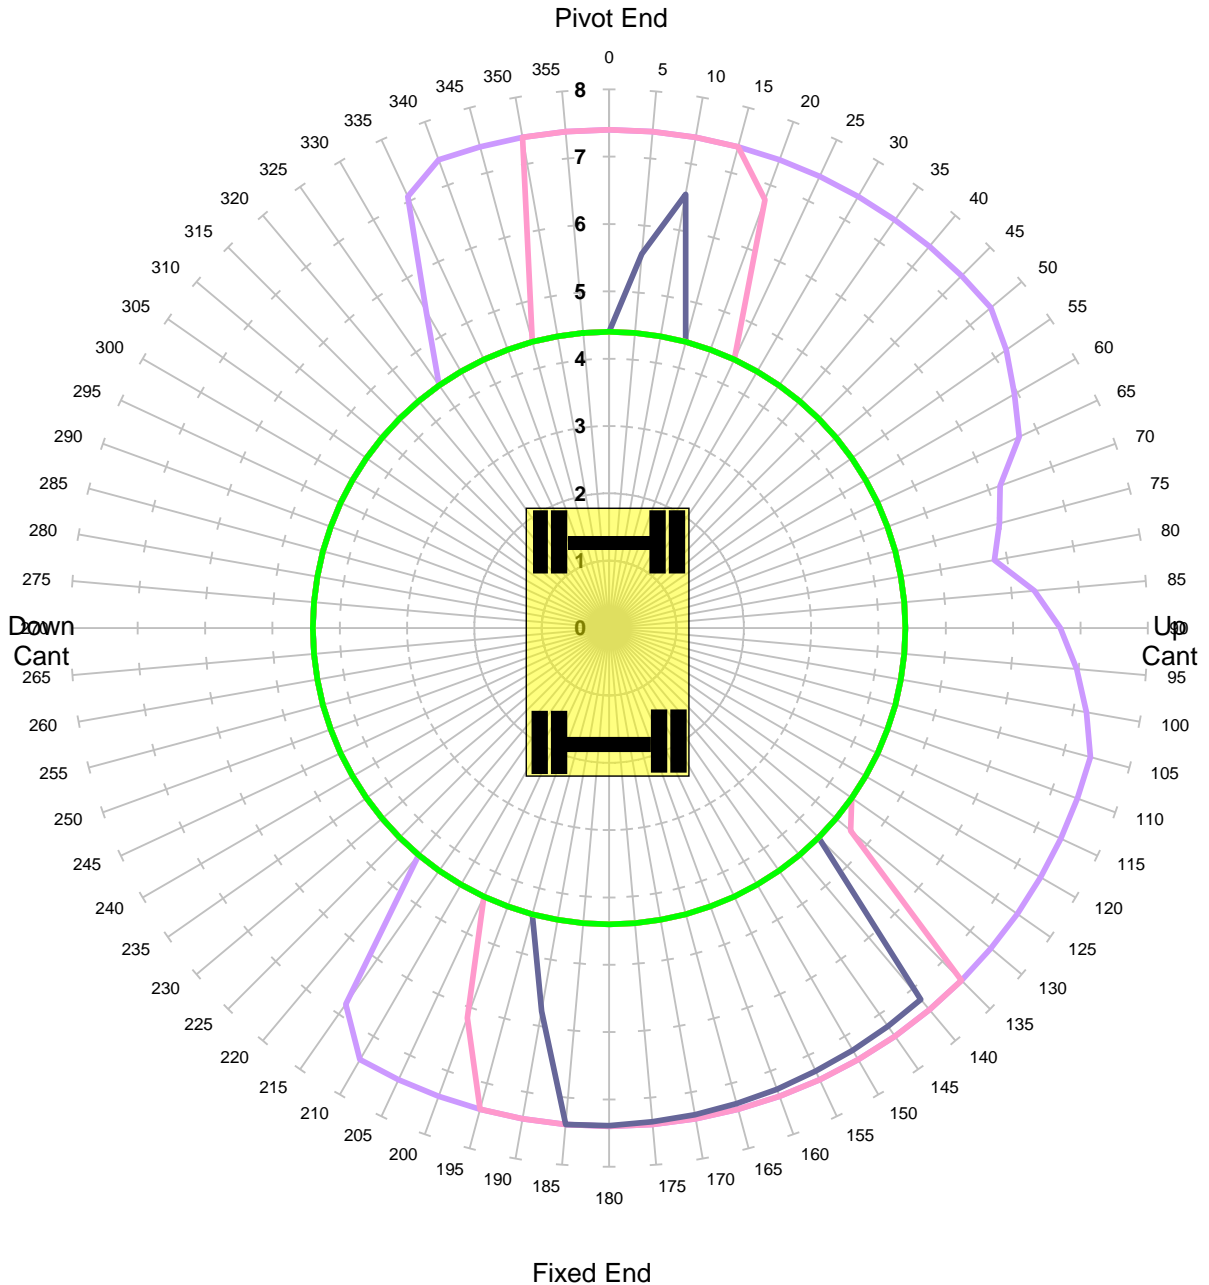


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	67.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift QH**  
**Locked Rail Cant -150mm**

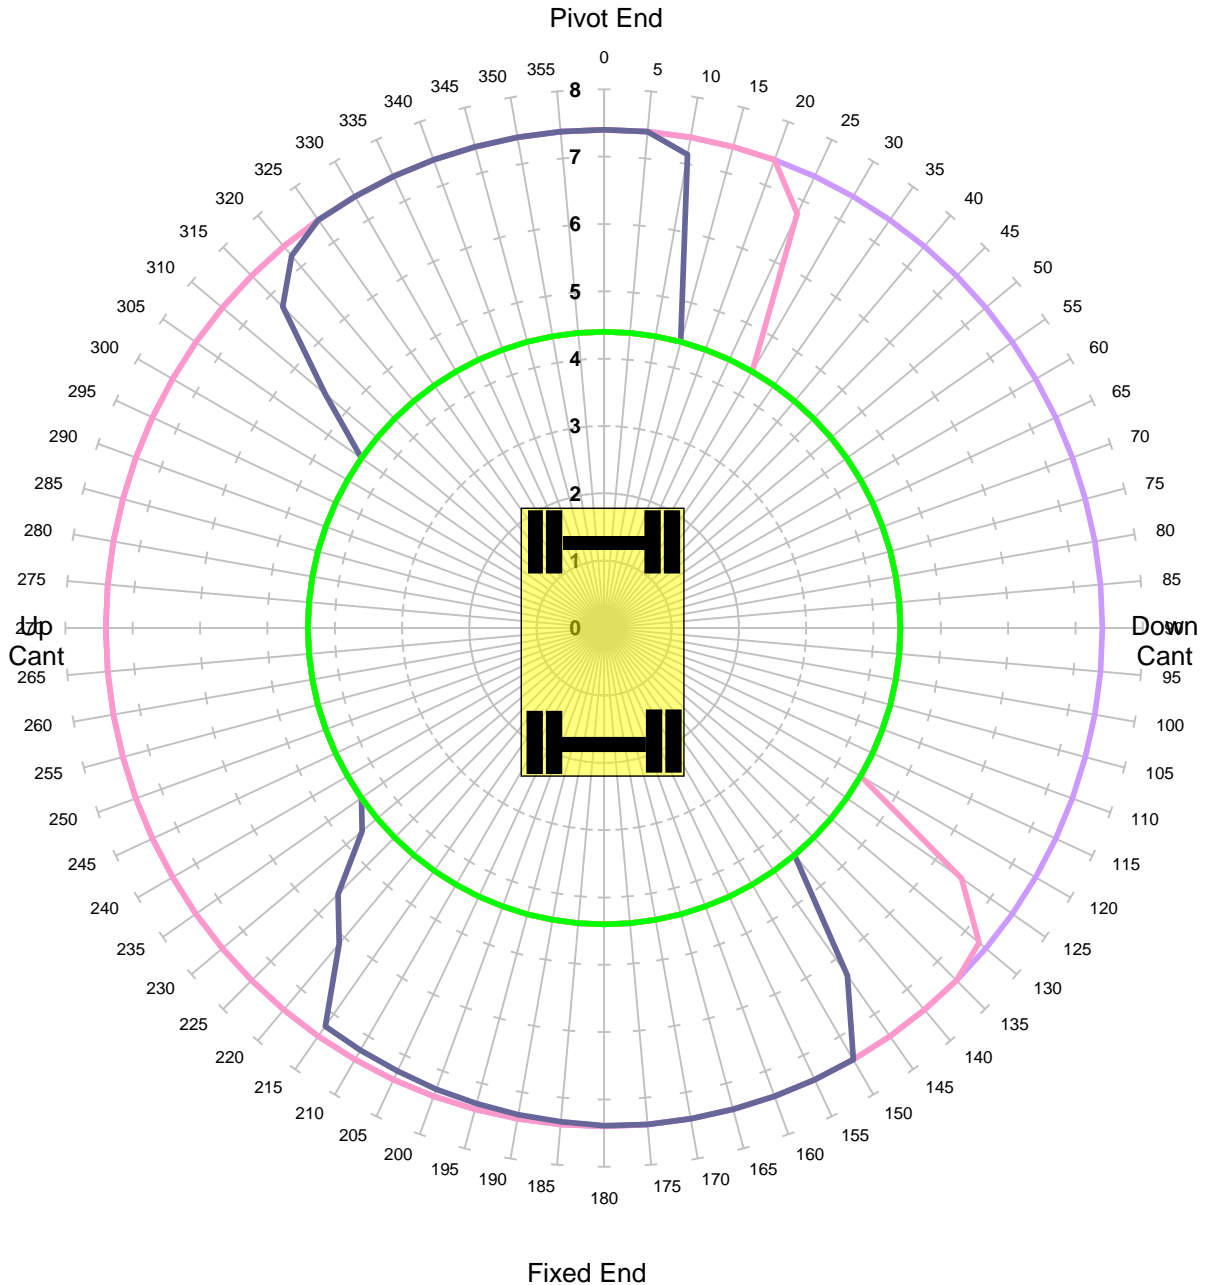


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	90.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift QH**  
**Locked Rail Cant -50mm**

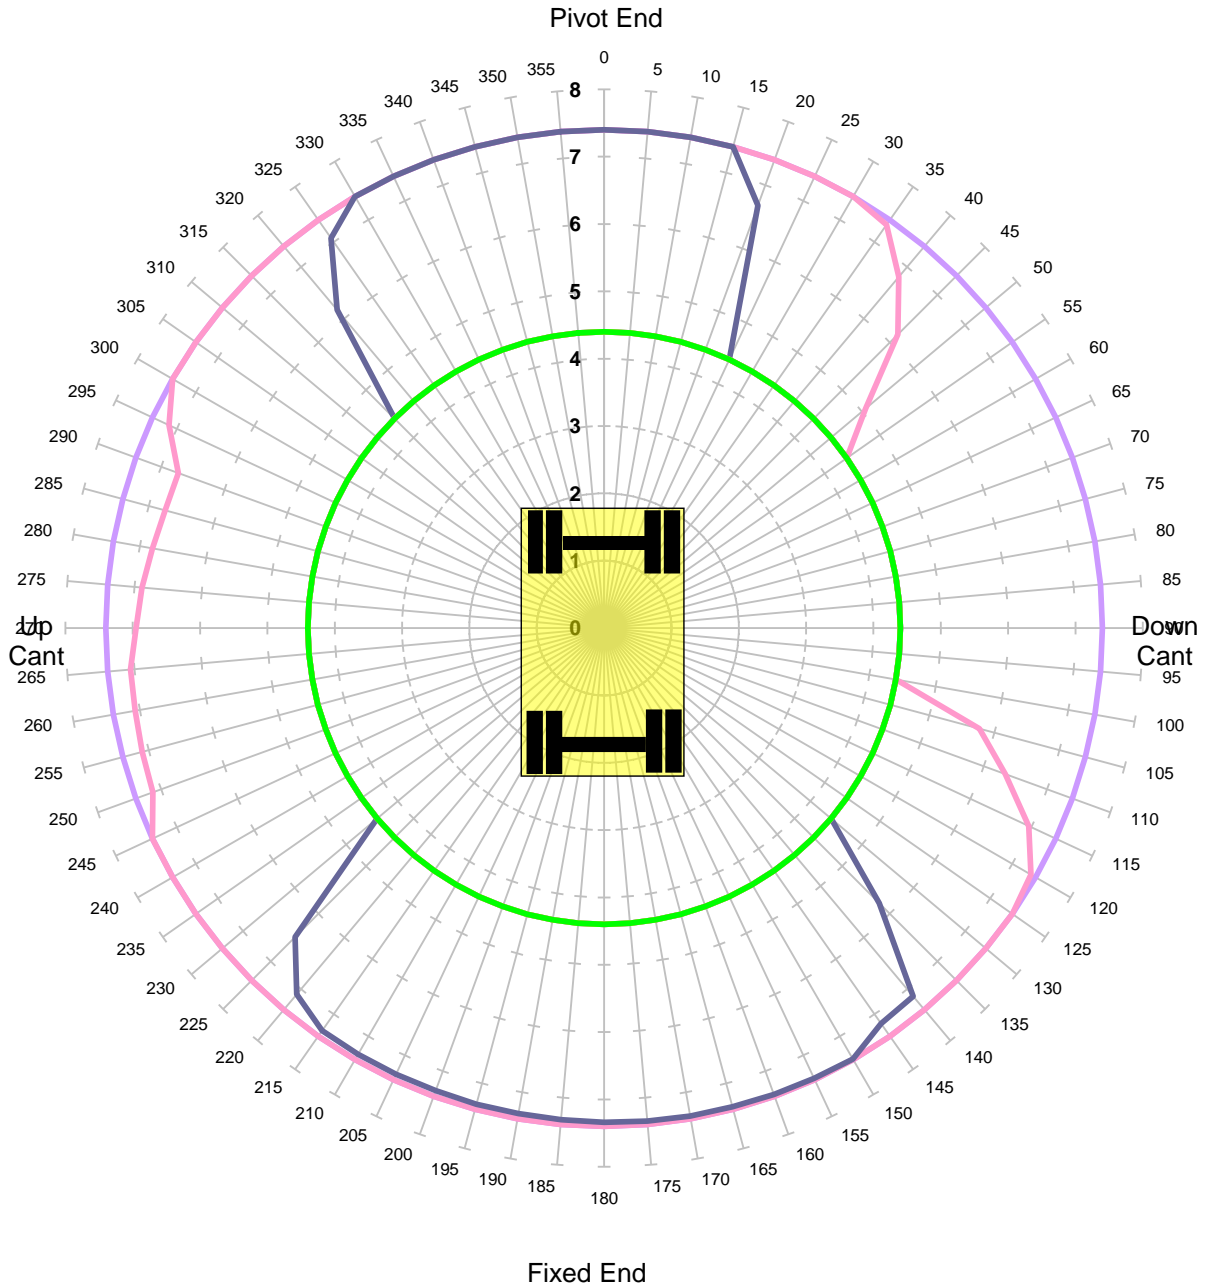


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	90.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift QH**  
**Locked Rail Cant 50mm**

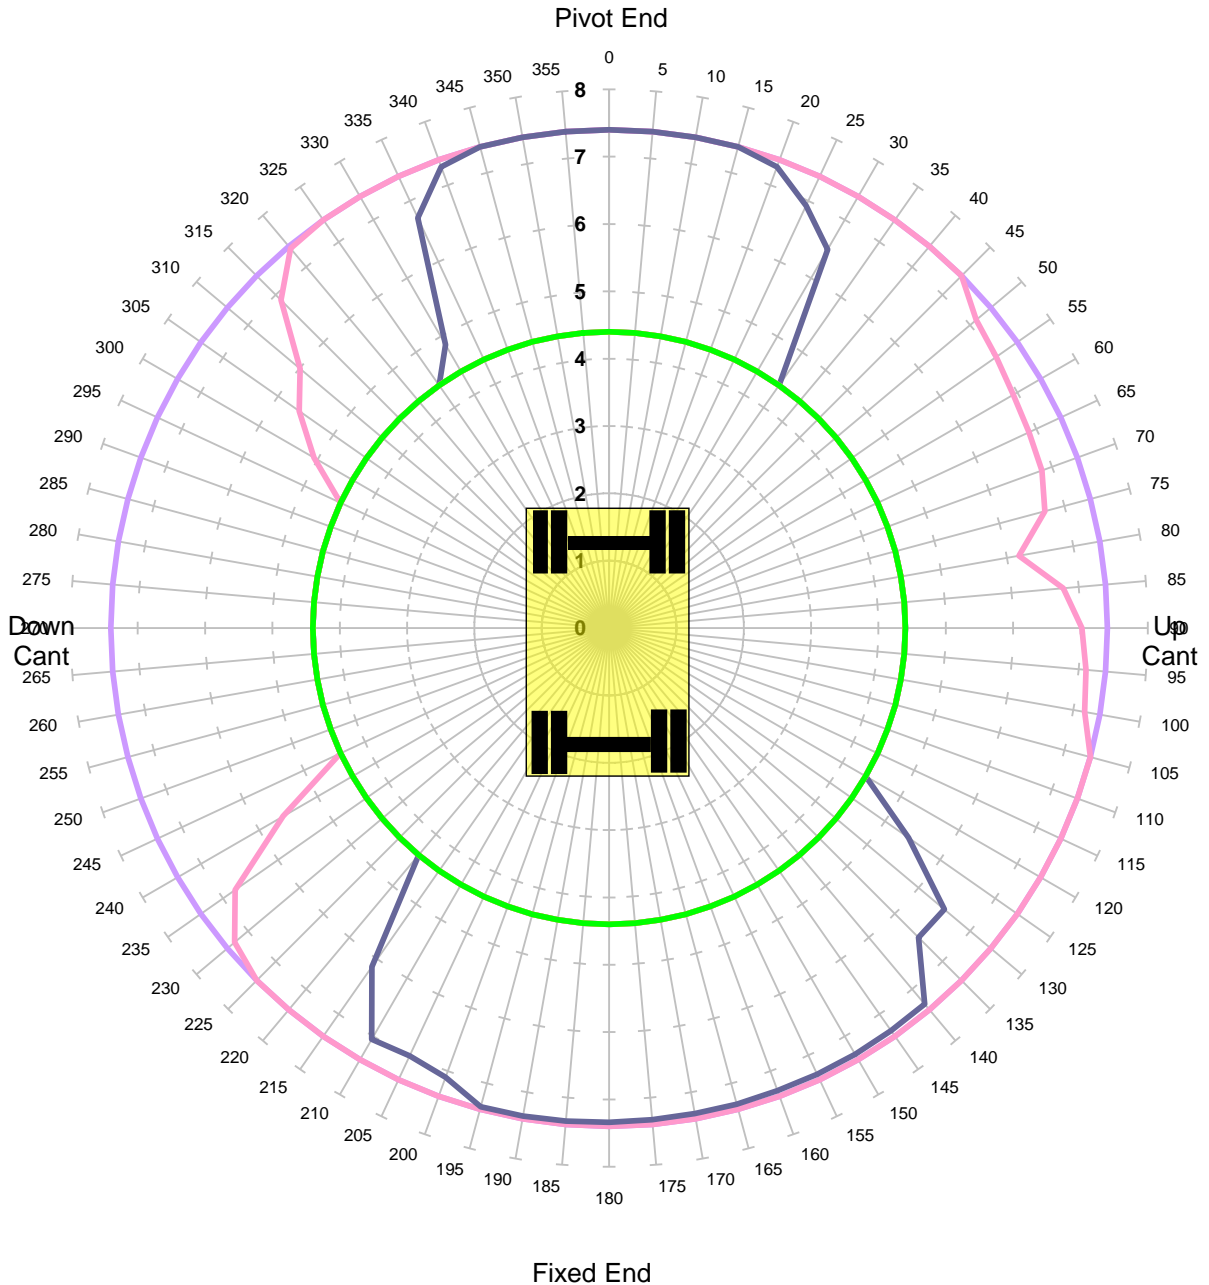


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	90.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift QH**  
**Locked Rail Cant 150mm**

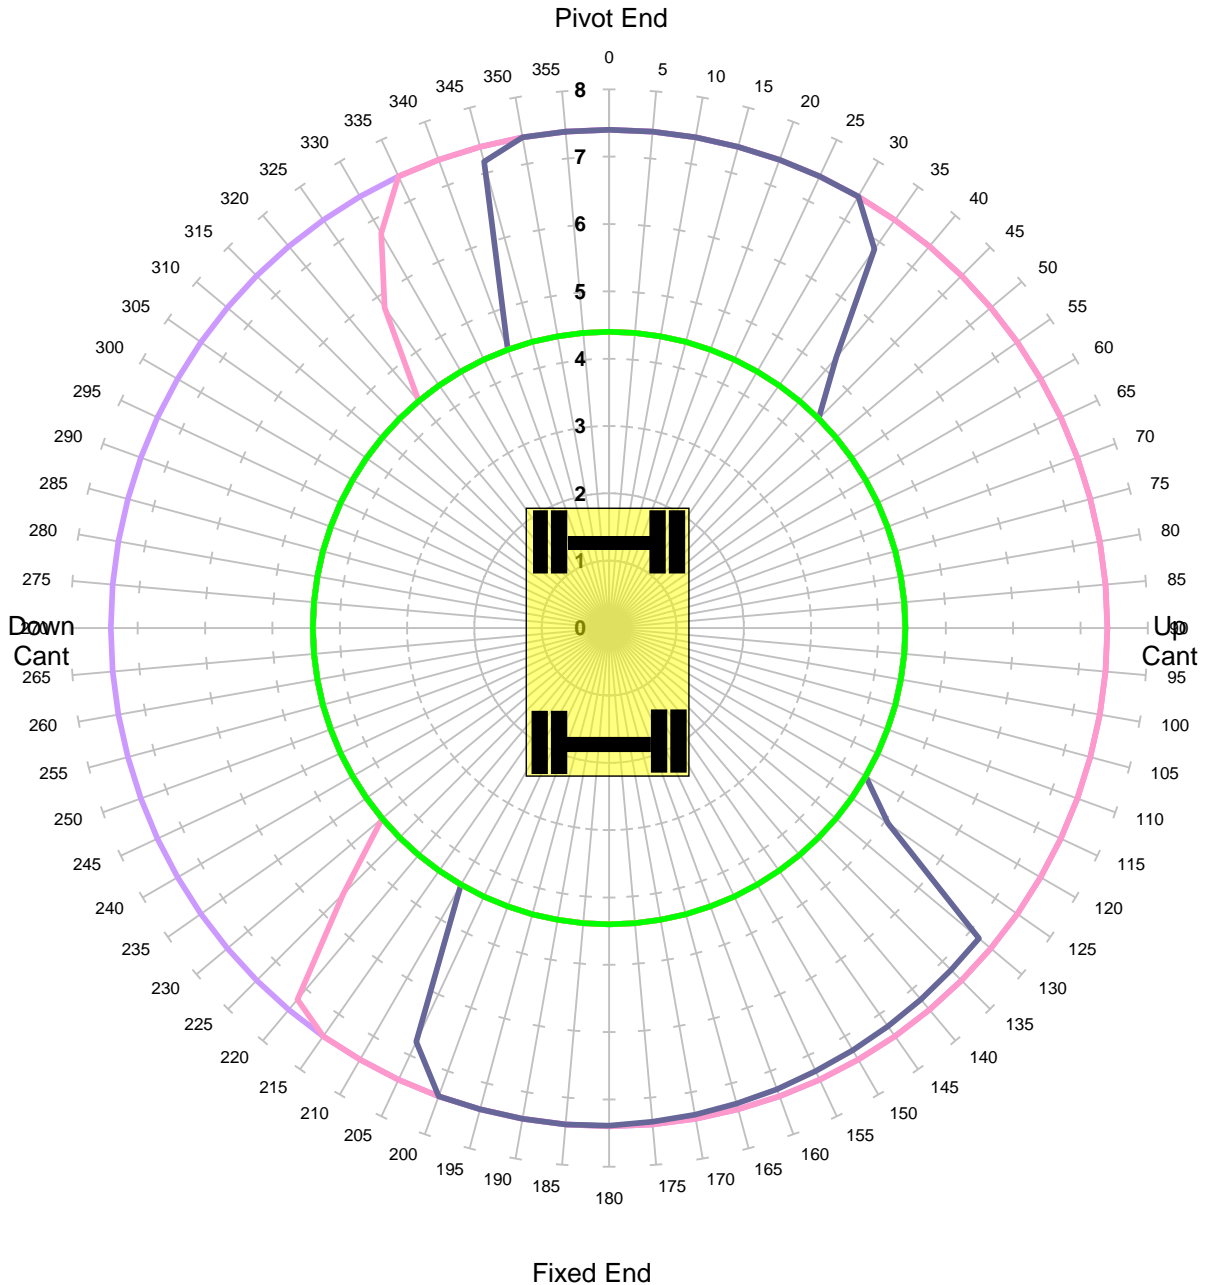


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	90.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Level Ground Height 2m Lift QH**  
Unlocked Road

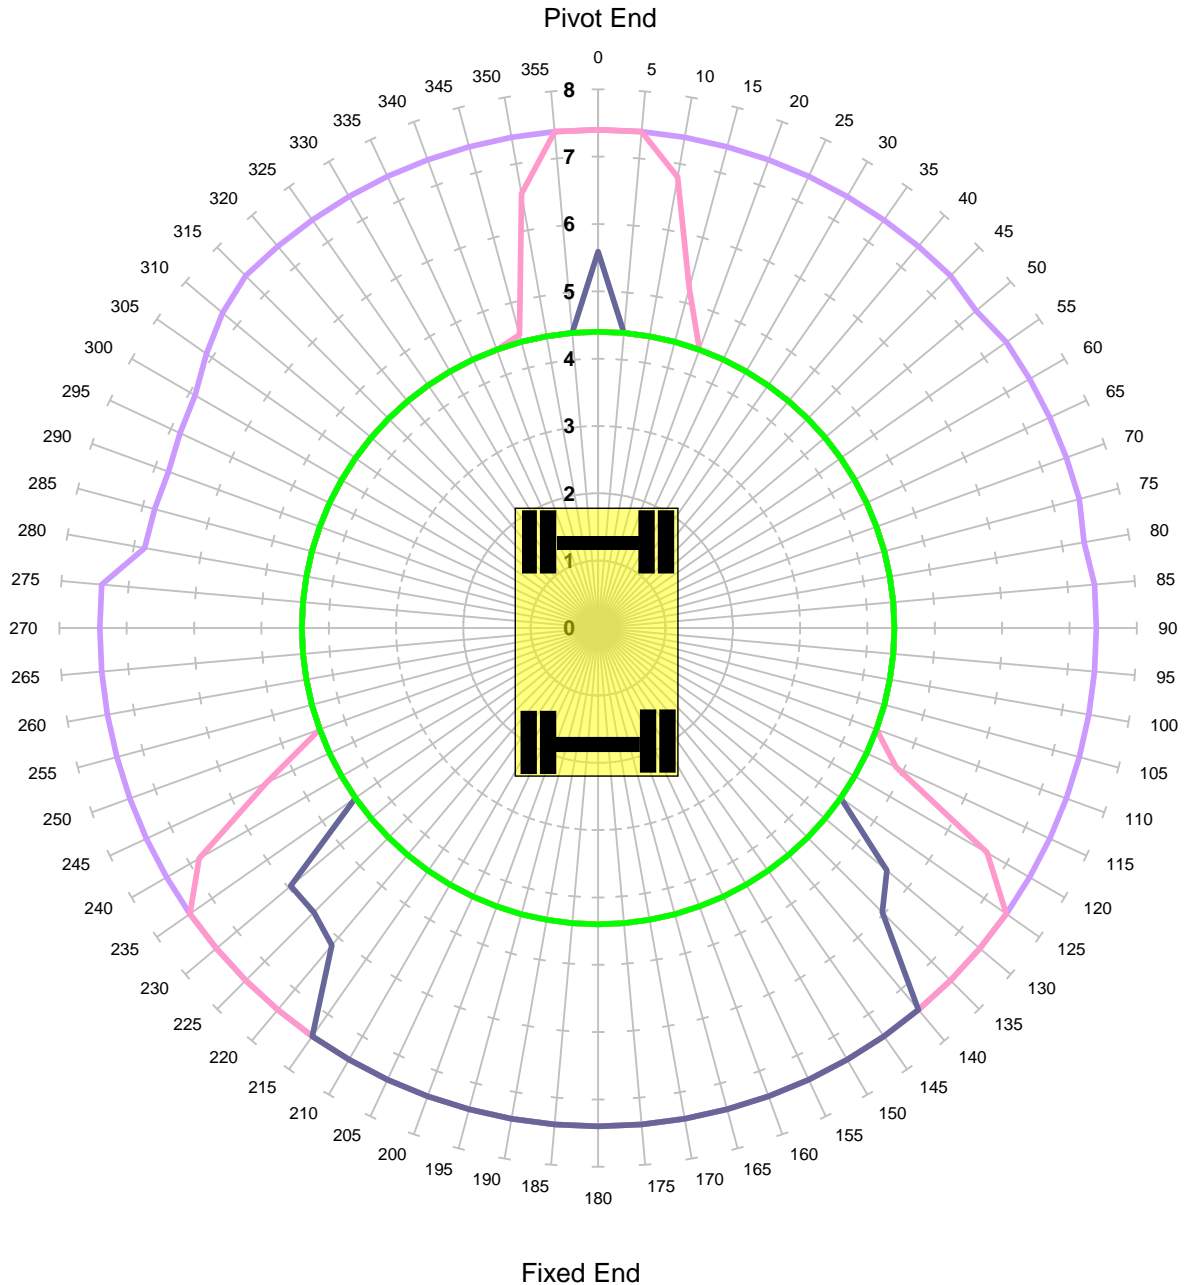

Units in Tonnes


- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	71.0%
<b>COMMENT:</b>			





**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Level Ground Height 2m Lift QH**  
Locked Road

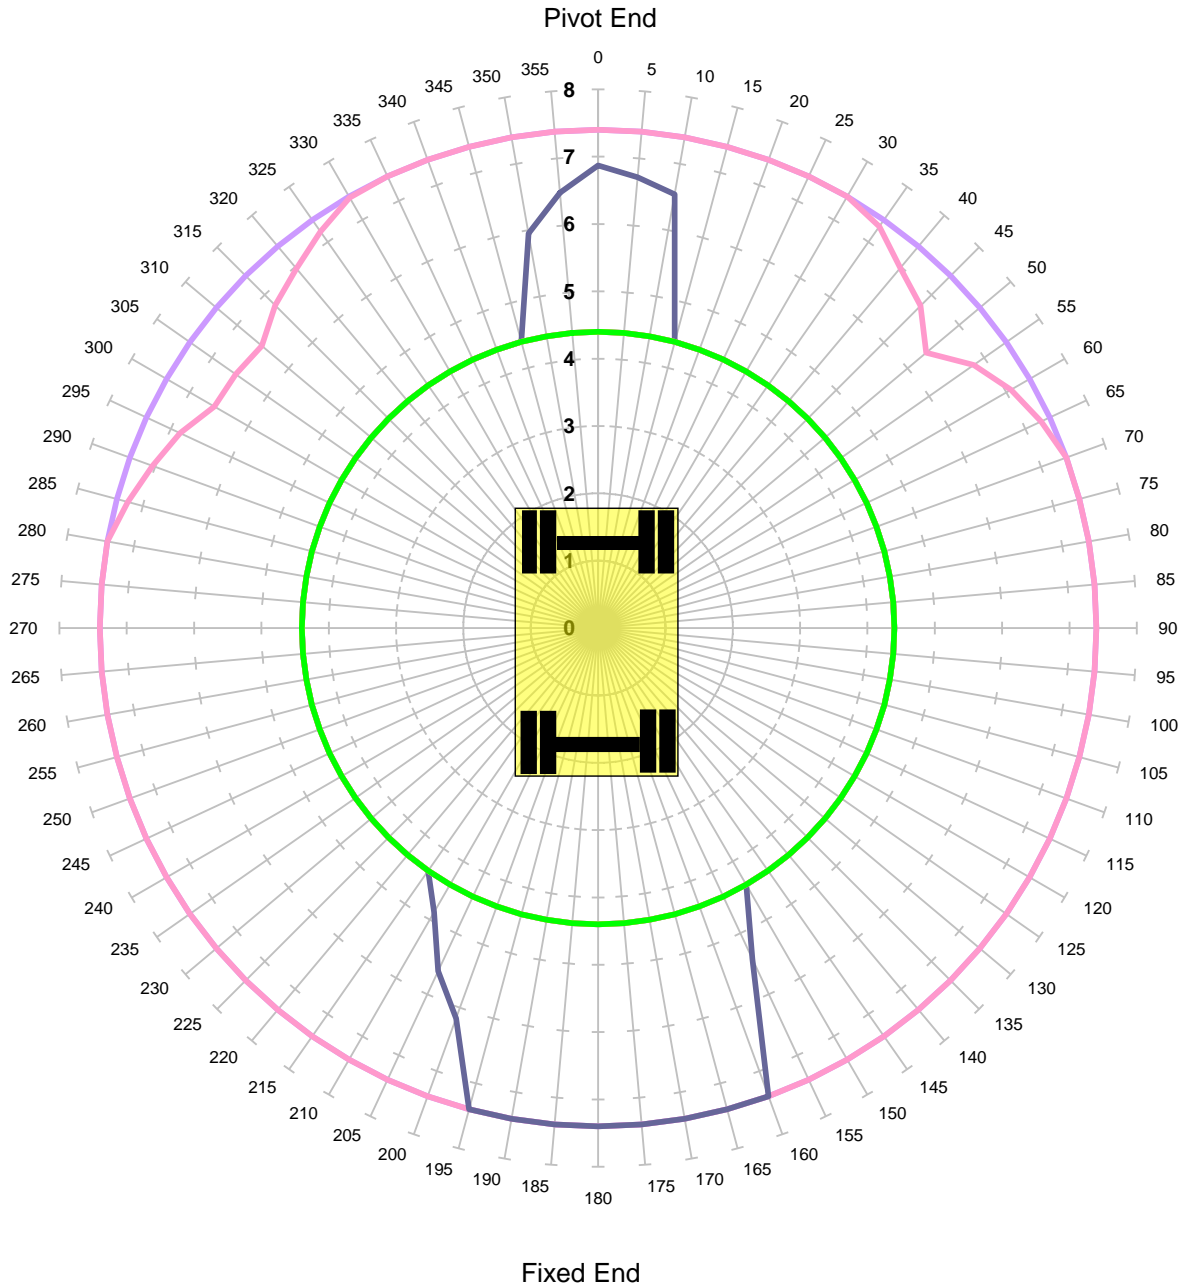


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	71.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift QH**  
**Unlocked Rail Cant -150mm - Tandem Lift**

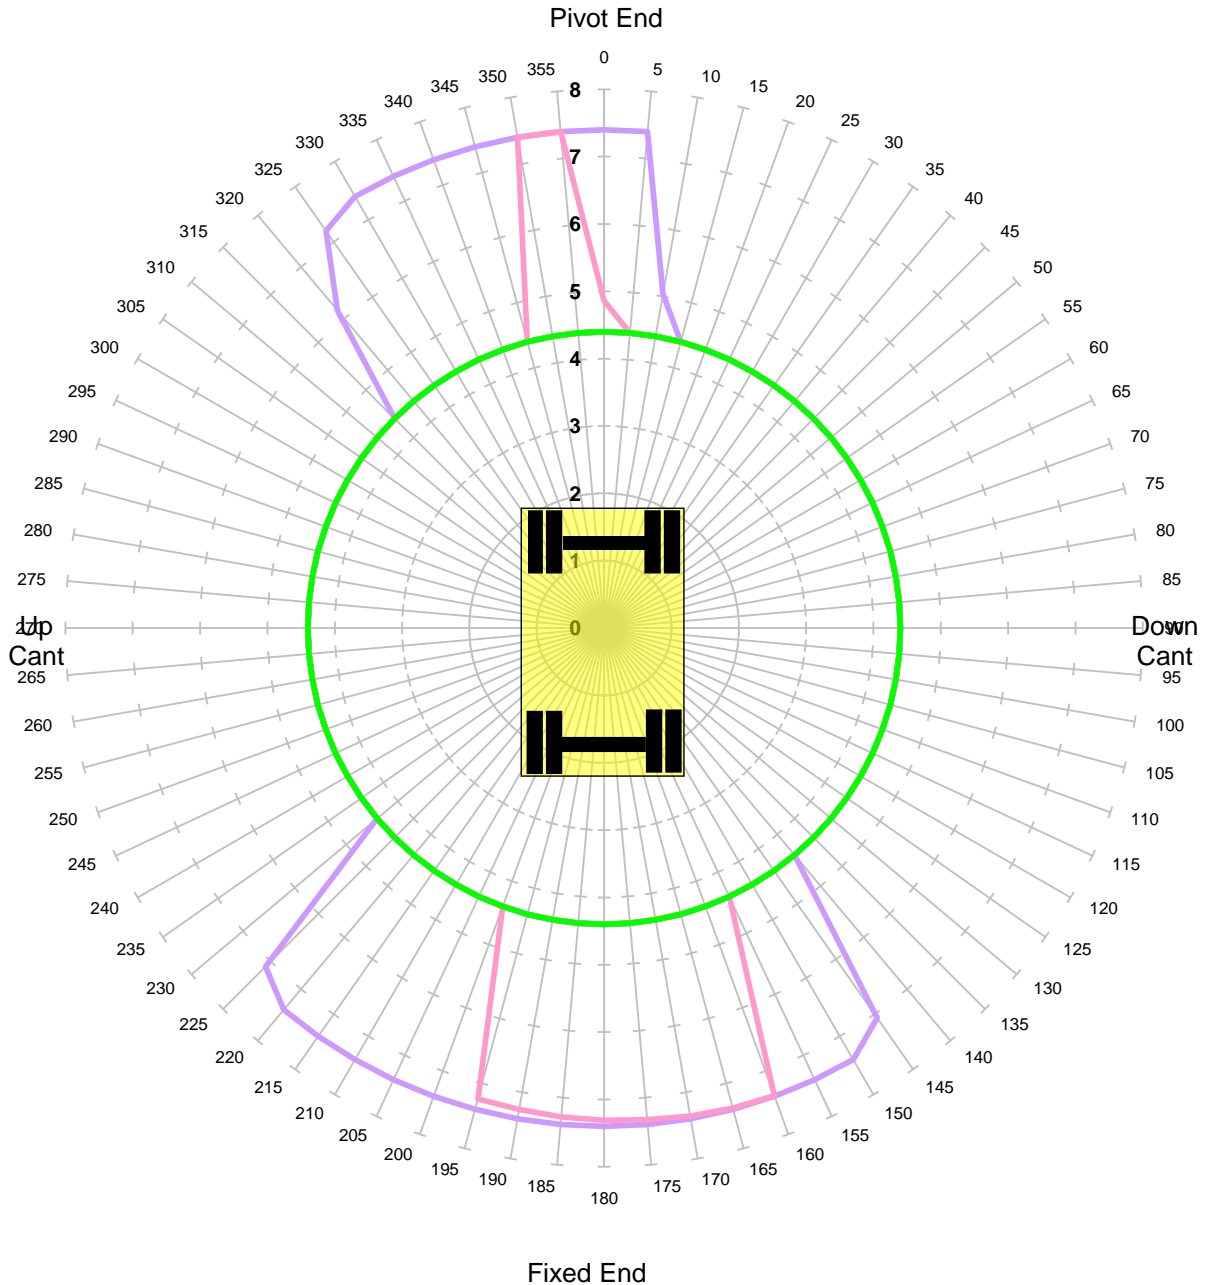


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	44.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift QH**  
**Unlocked Rail Cant -50mm - Tandem Lift**

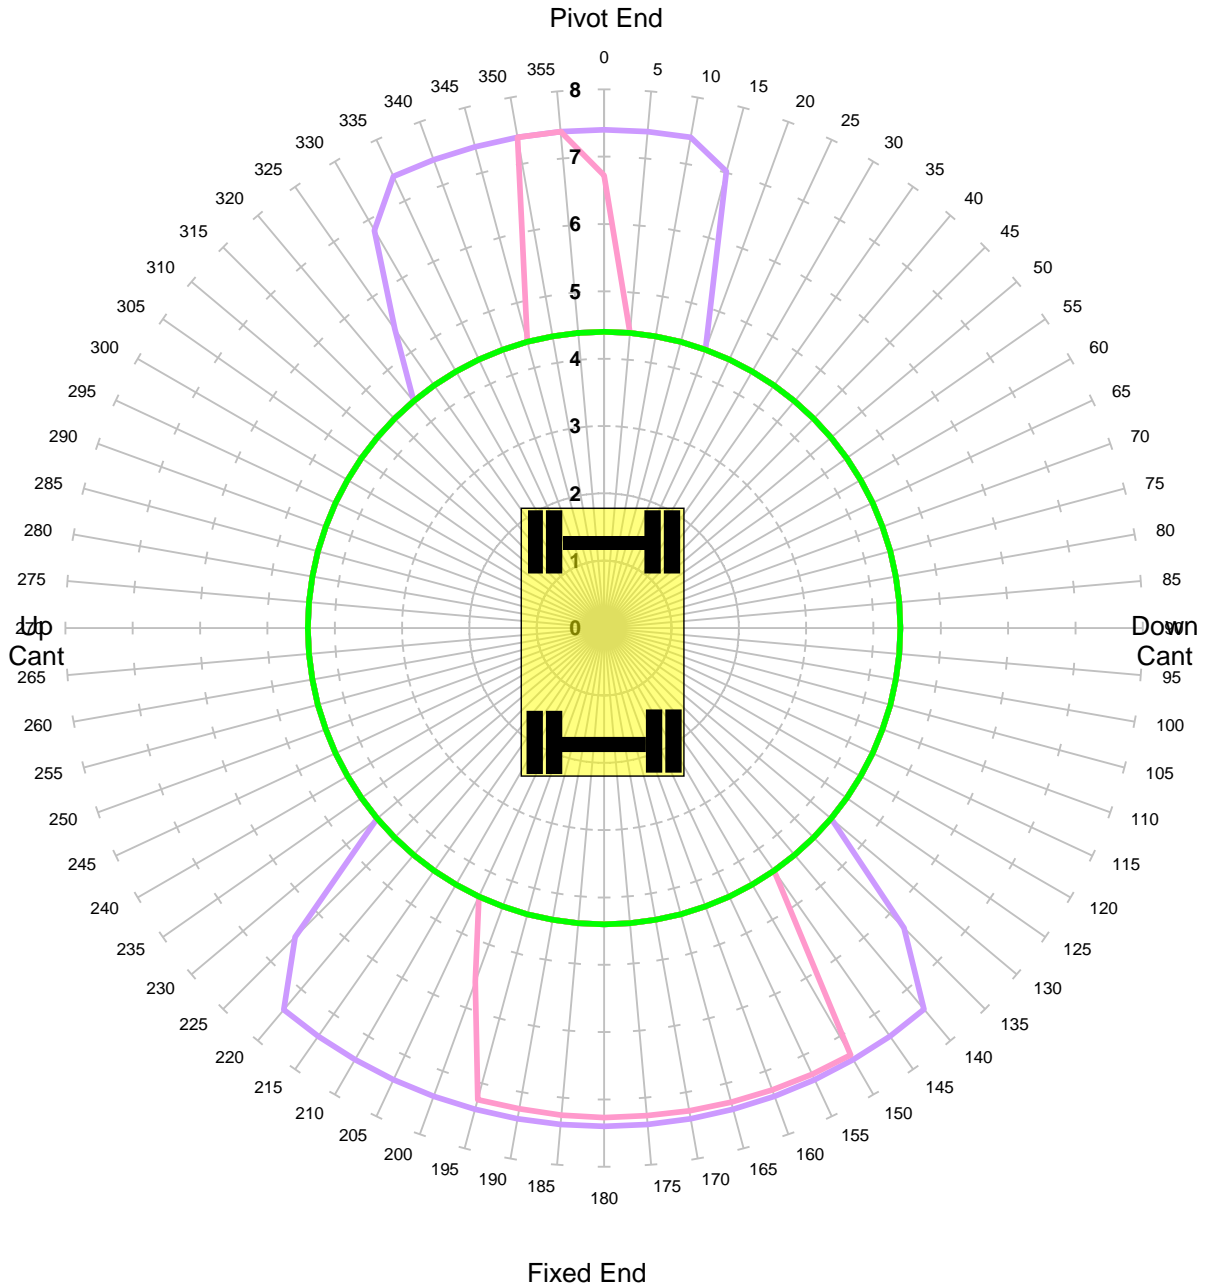


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	44.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift QH**  
**Unlocked Rail Cant 50mm - Tandem Lift**

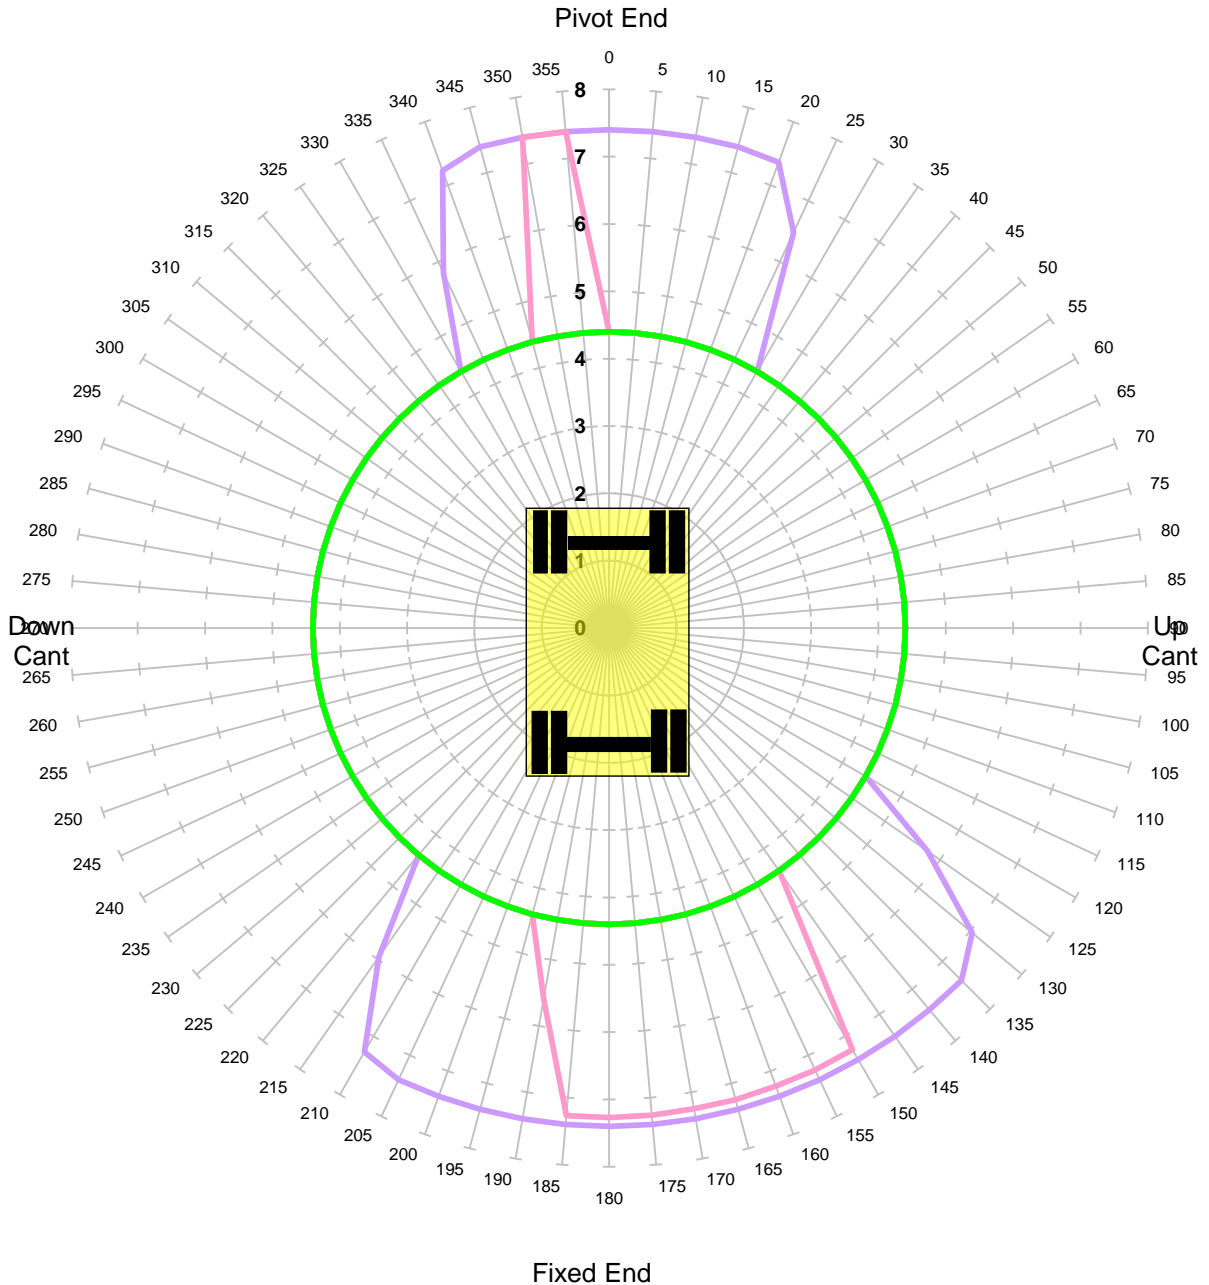


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	44.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift QH**  
**Unlocked Rail Cant 150mm - Tandem Lift**

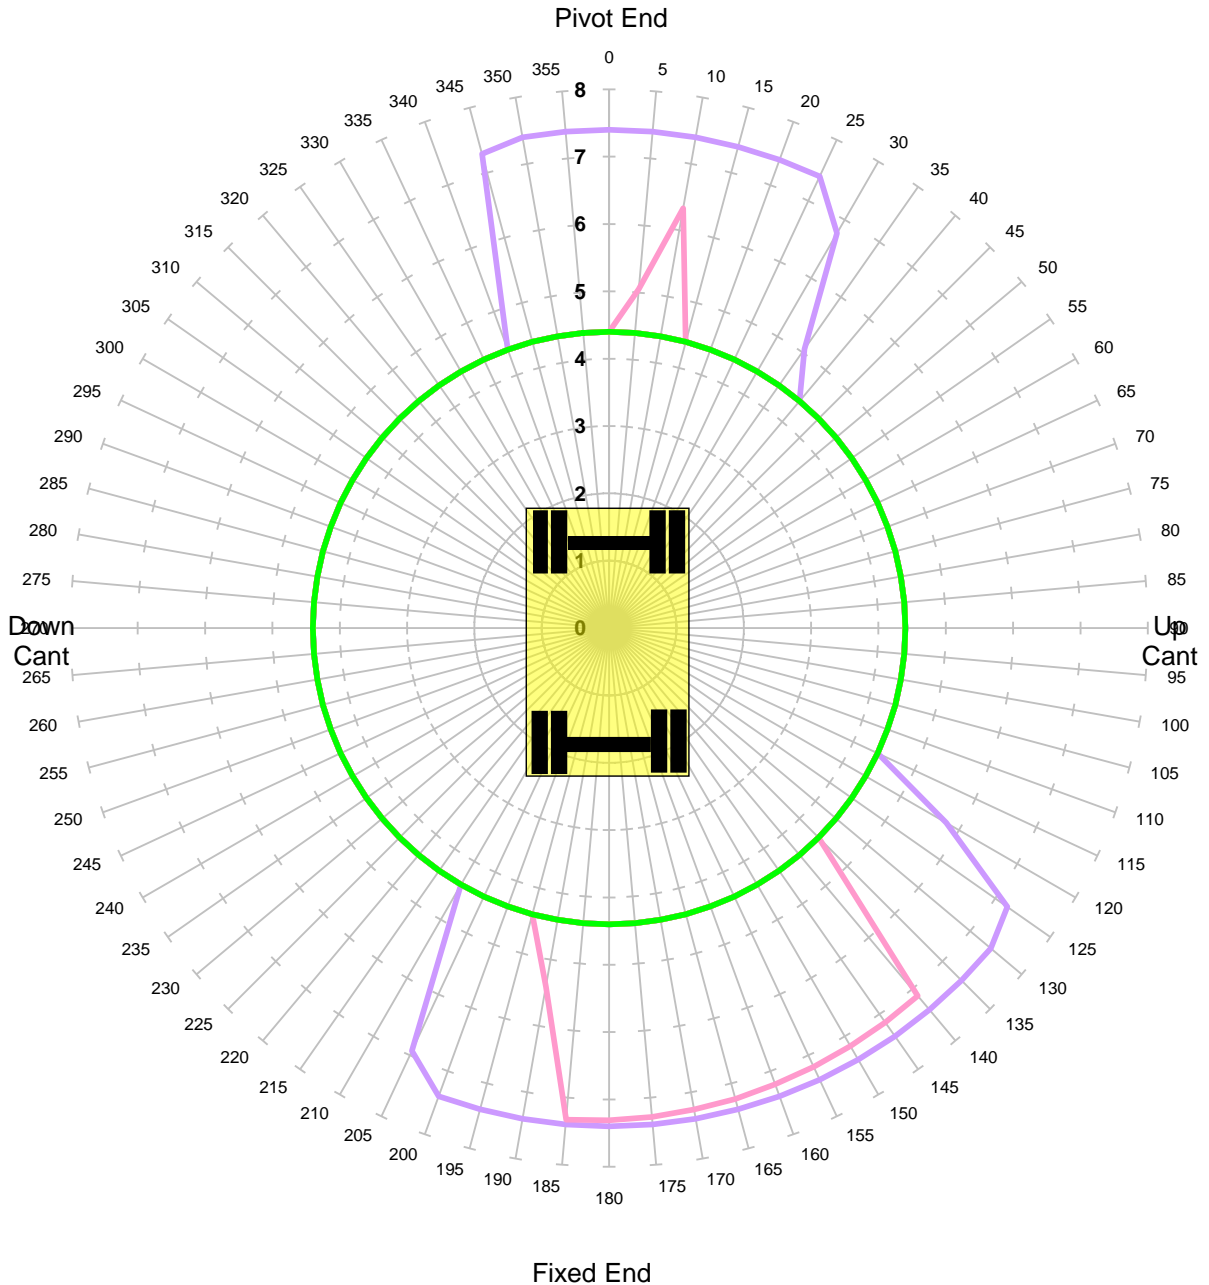


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	44.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift QH**  
**Locked Rail Cant -150mm - Tandem Lift**

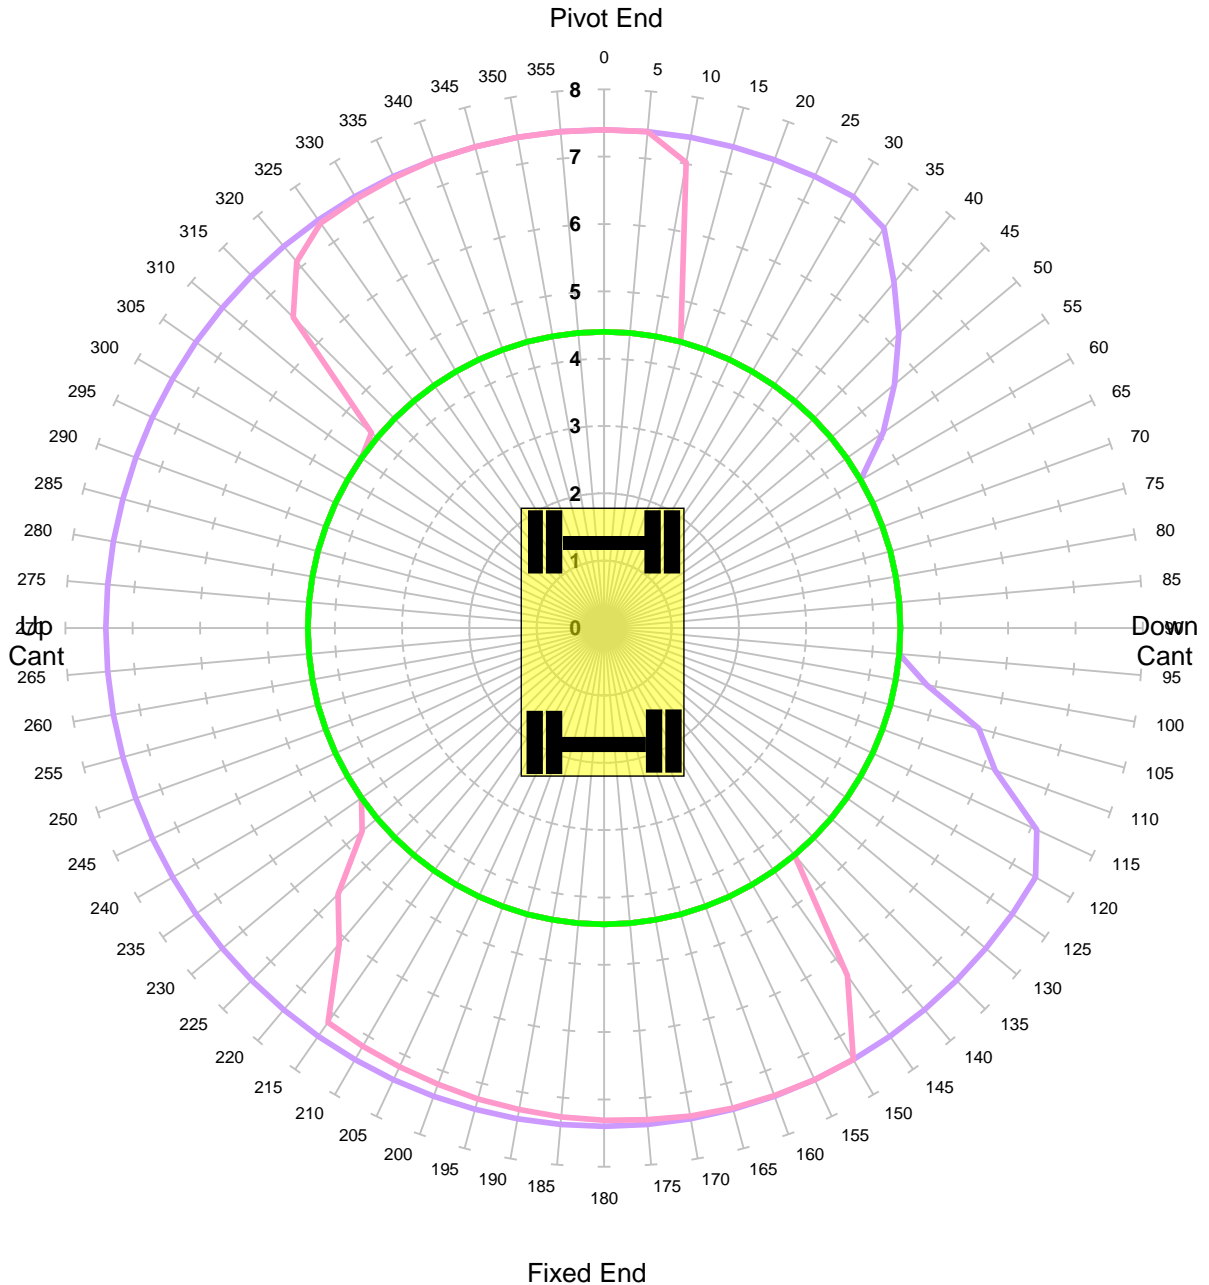

Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	59.0%
<b>COMMENT:</b>			




**KING TRANSPORT EQUIPMENT LTD**

**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**

**Gradient 1 in -25 Height 2m Lift QH**

**Locked Rail Cant -50mm - Tandem Lift**

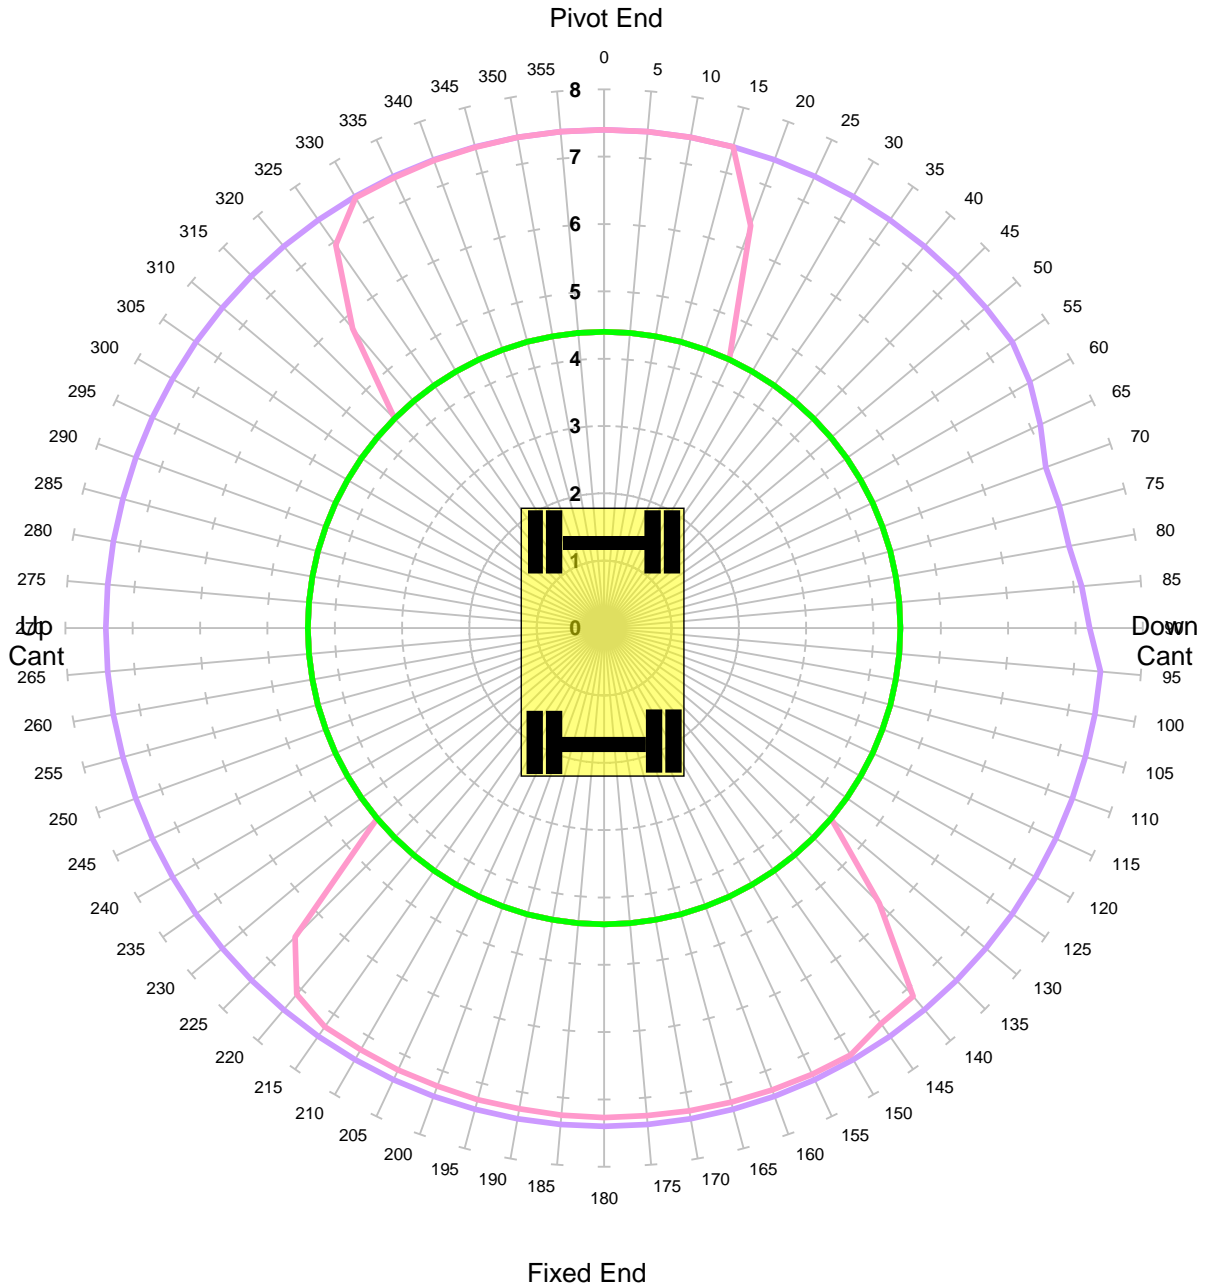

Units in Tonnes


- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	59.0%
<b>COMMENT:</b>			





**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift QH**  
**Locked Rail Cant 50mm - Tandem Lift**

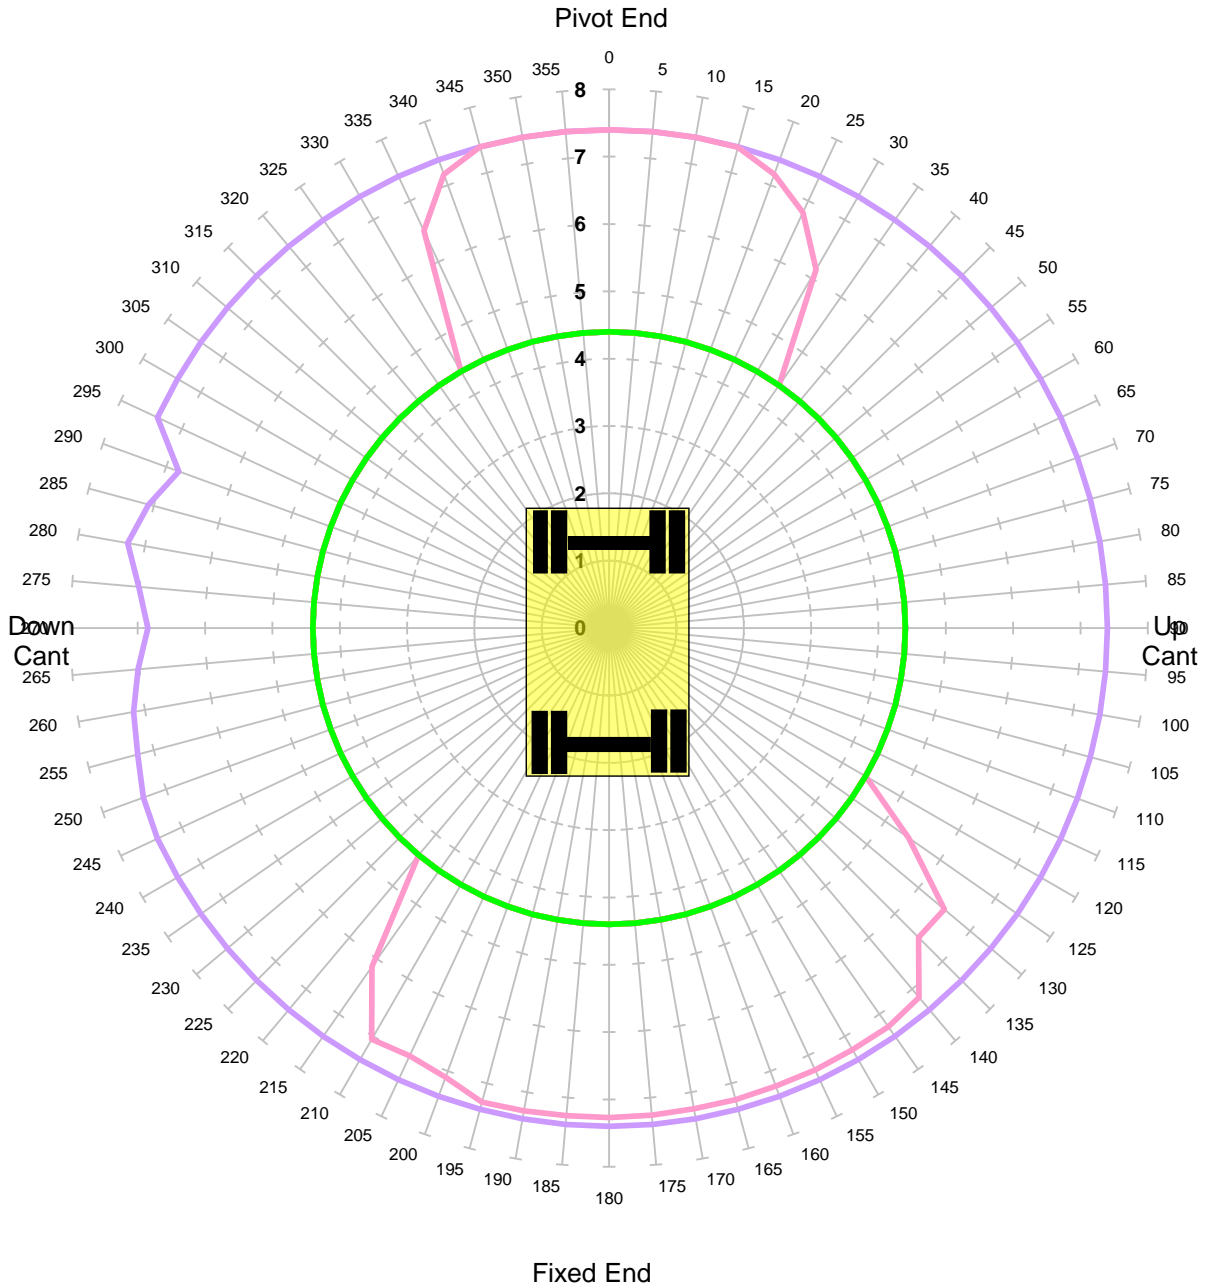


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	59.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Gradient 1 in -25 Height 2m Lift QH**  
**Locked Rail Cant 150mm - Tandem Lift**

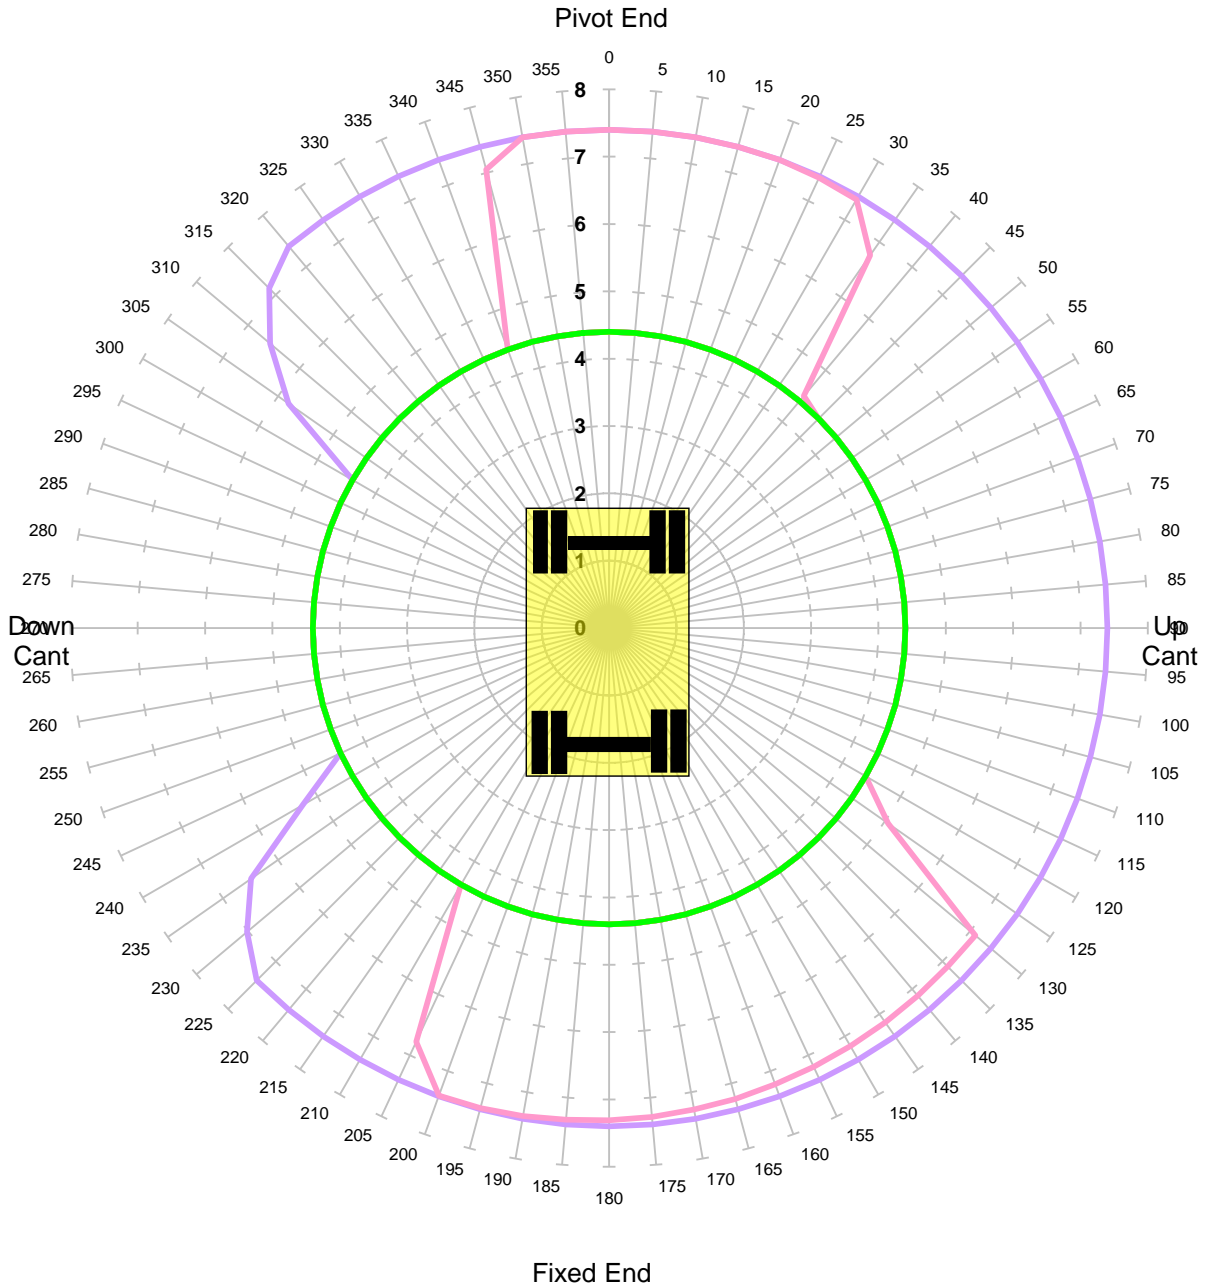


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	59.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Level Ground Height 2m Lift QH**  
**Unlocked Road - Tandem Lift**

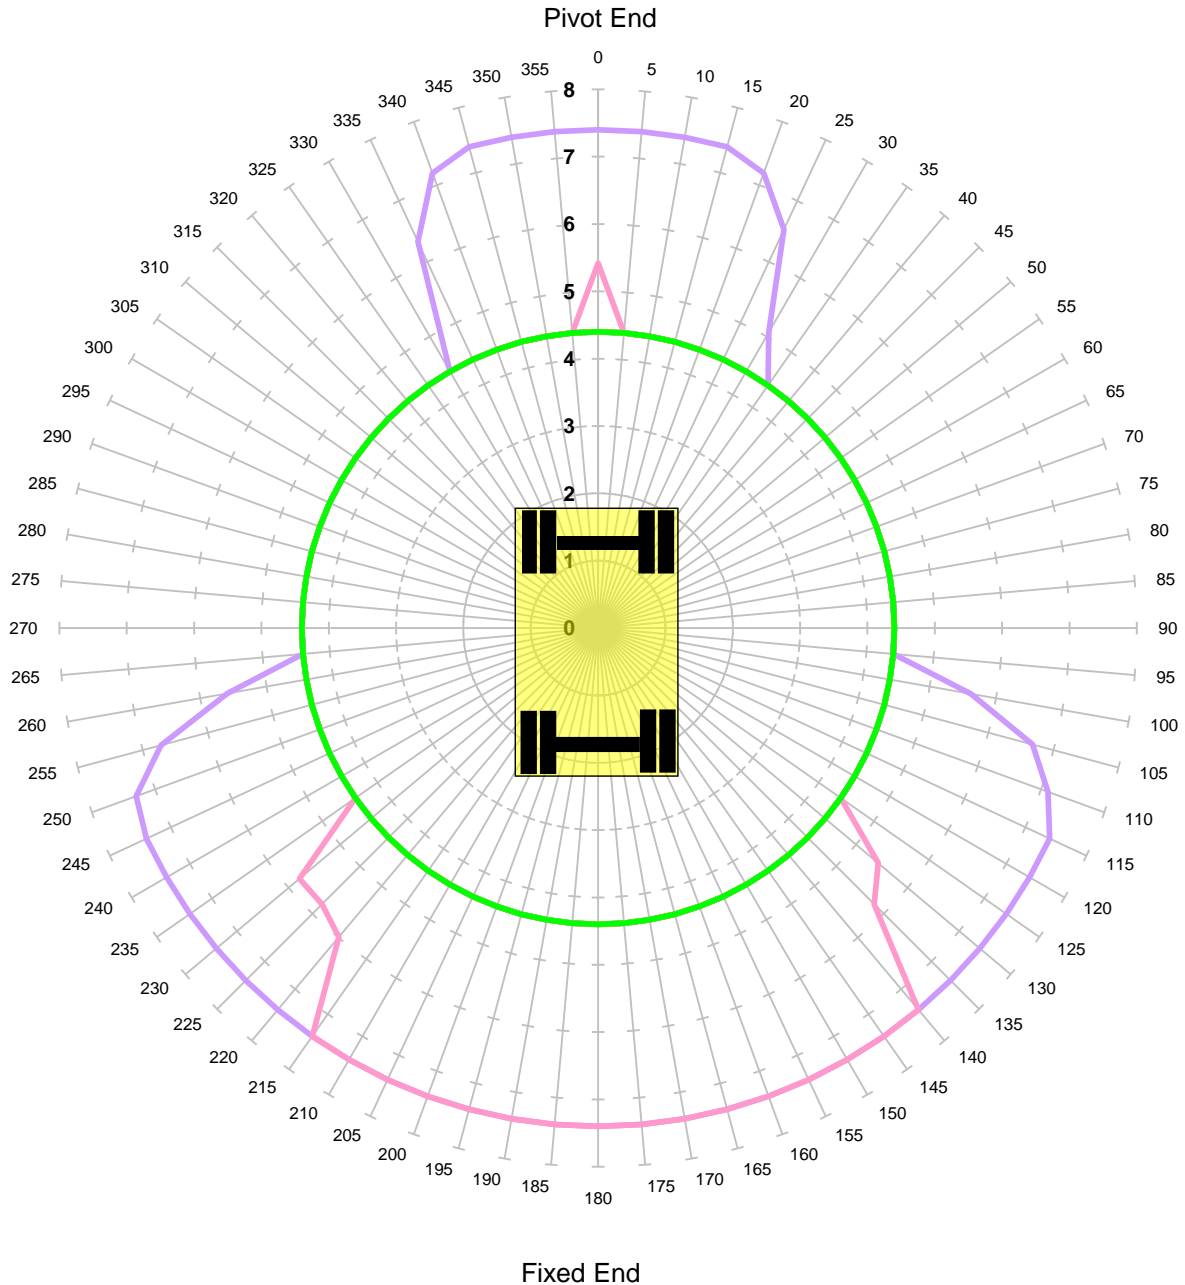


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	47.0%
<b>COMMENT:</b>			



**KING TRANSPORT EQUIPMENT LTD**  
**Max Capacity Contours of Radius(m) Plots 2.1m Dipper**  
**Level Ground Height 2m Lift QH**  
**Locked Road - Tandem Lift**

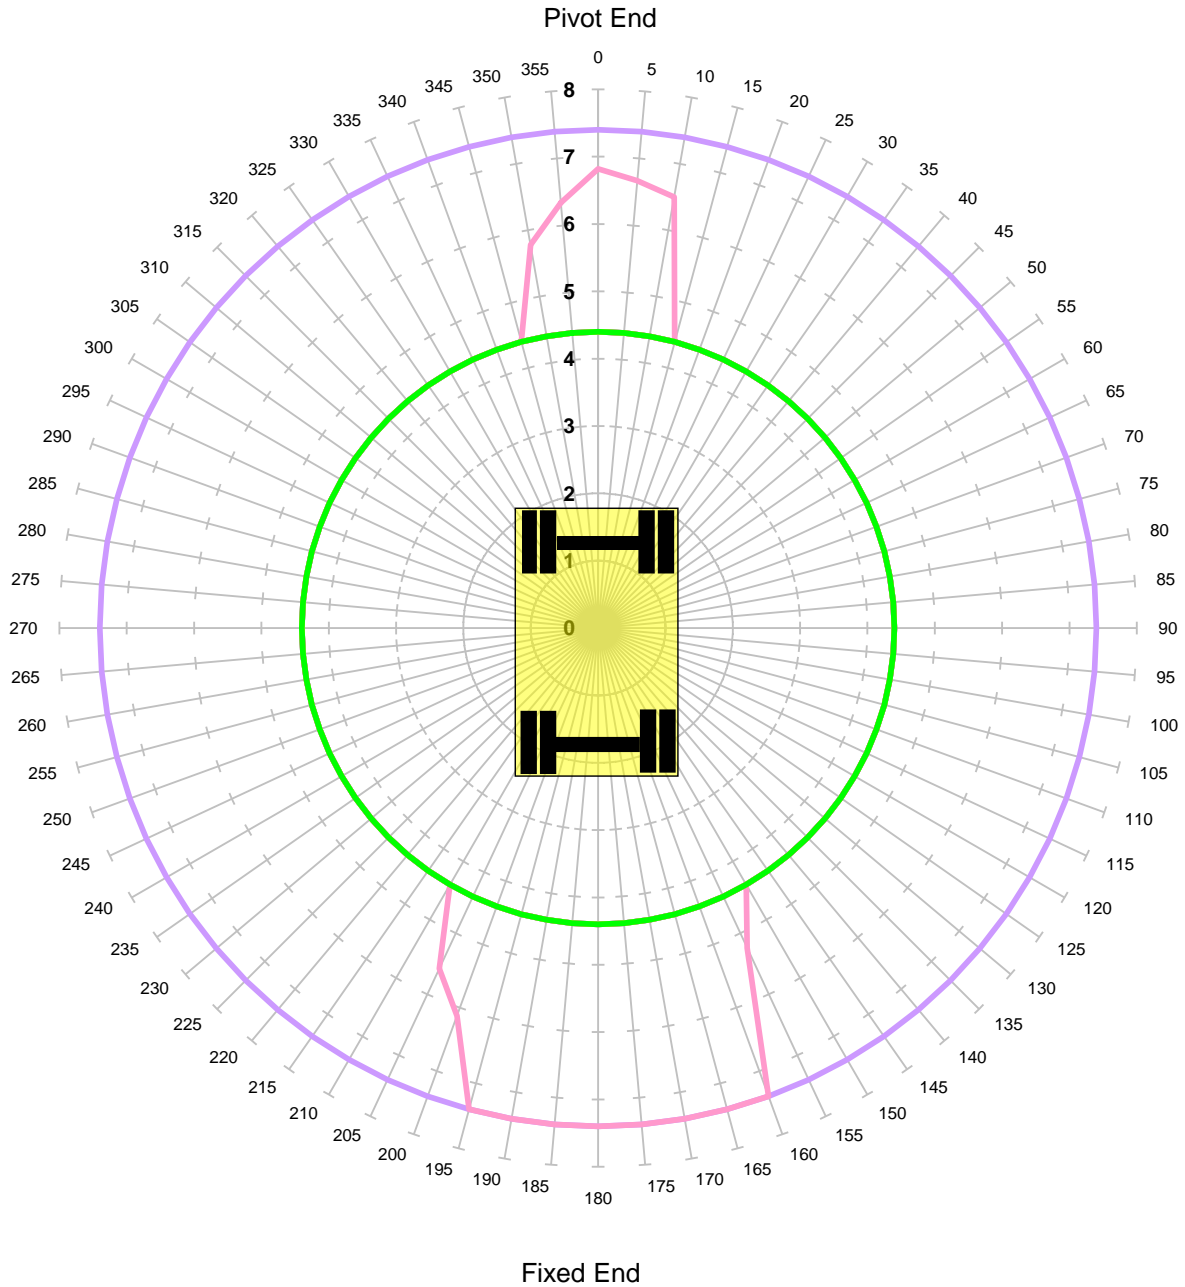

Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

<b>MACHINE &amp; MODEL:</b>	Komatsu PW160	<b>REFERENCE:</b>	
<b>SERIAL No:</b>	H55515	<b>DATE OF CHART:</b>	29-Mar-2021
<b>EQUIPMENT:</b>	5.15m + 2.10m	<b>SAFETY FACTOR:</b>	47.0%
<b>COMMENT:</b>			