


Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant -150mm

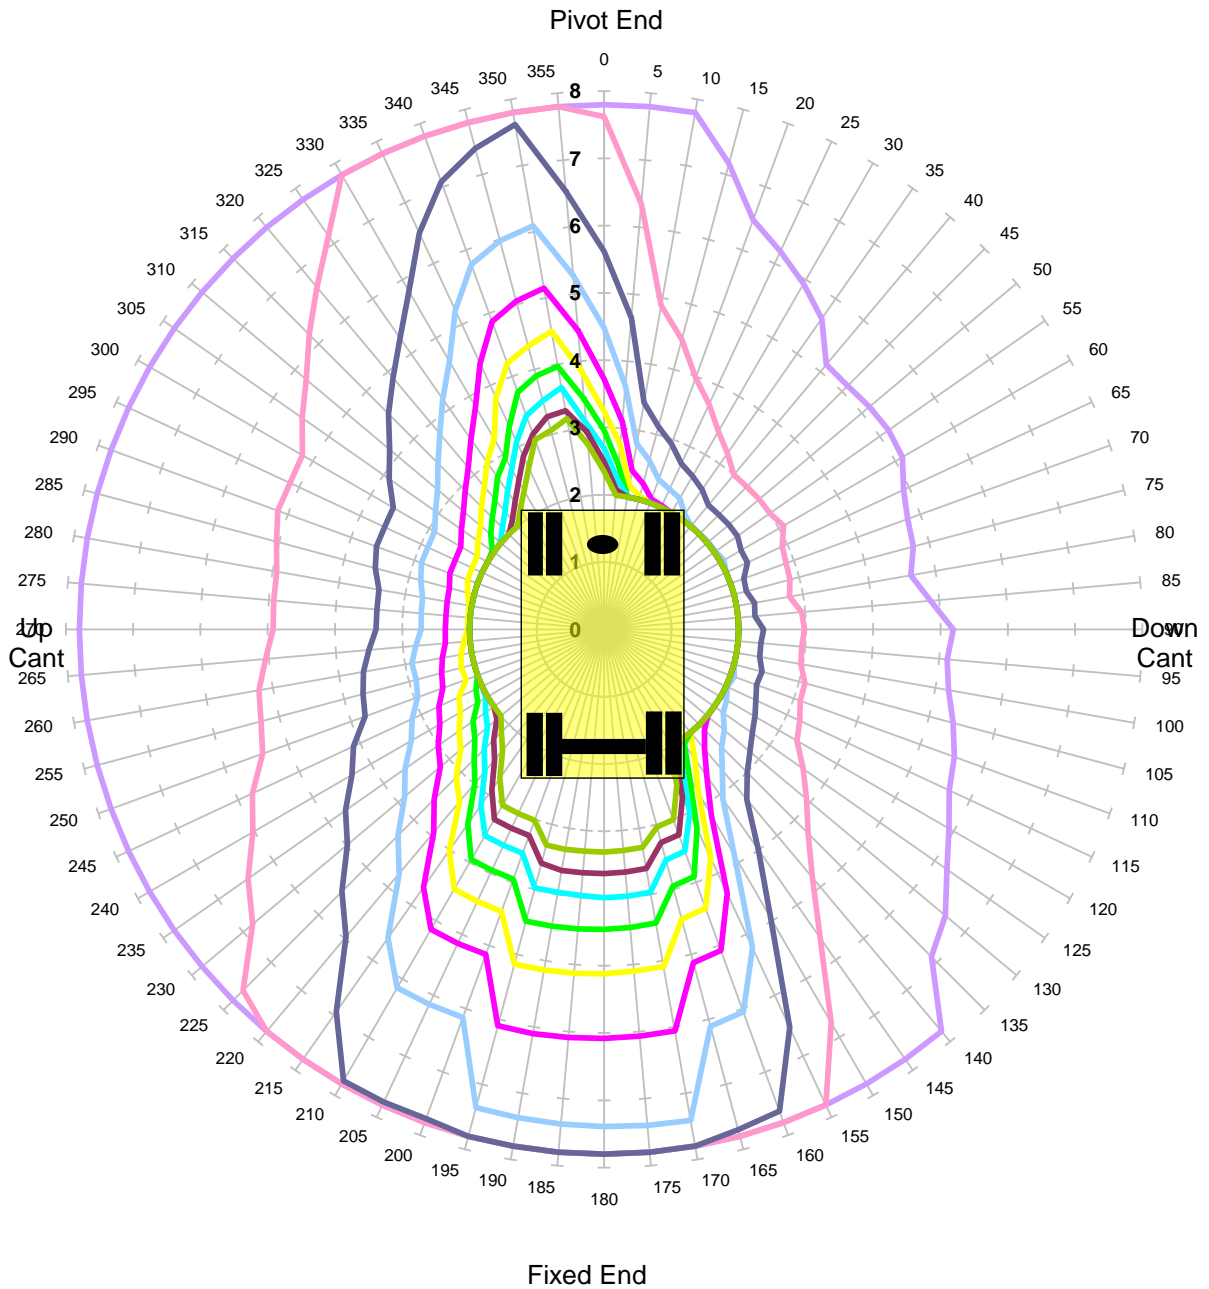


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 67.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant -50mm

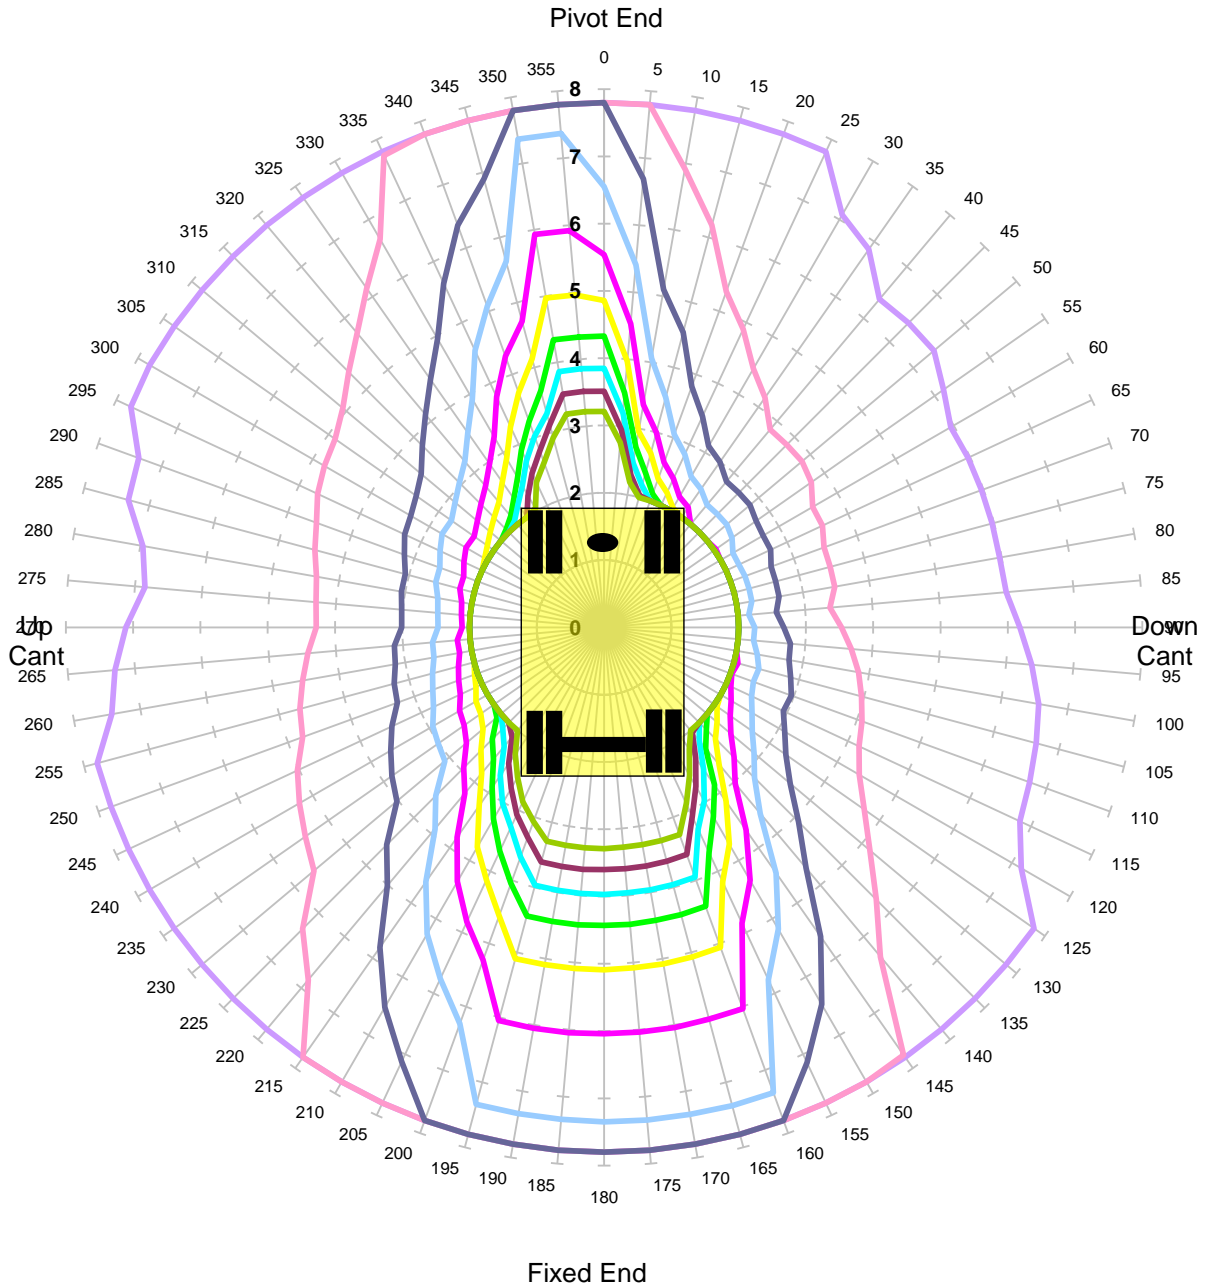


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 67.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant 50mm

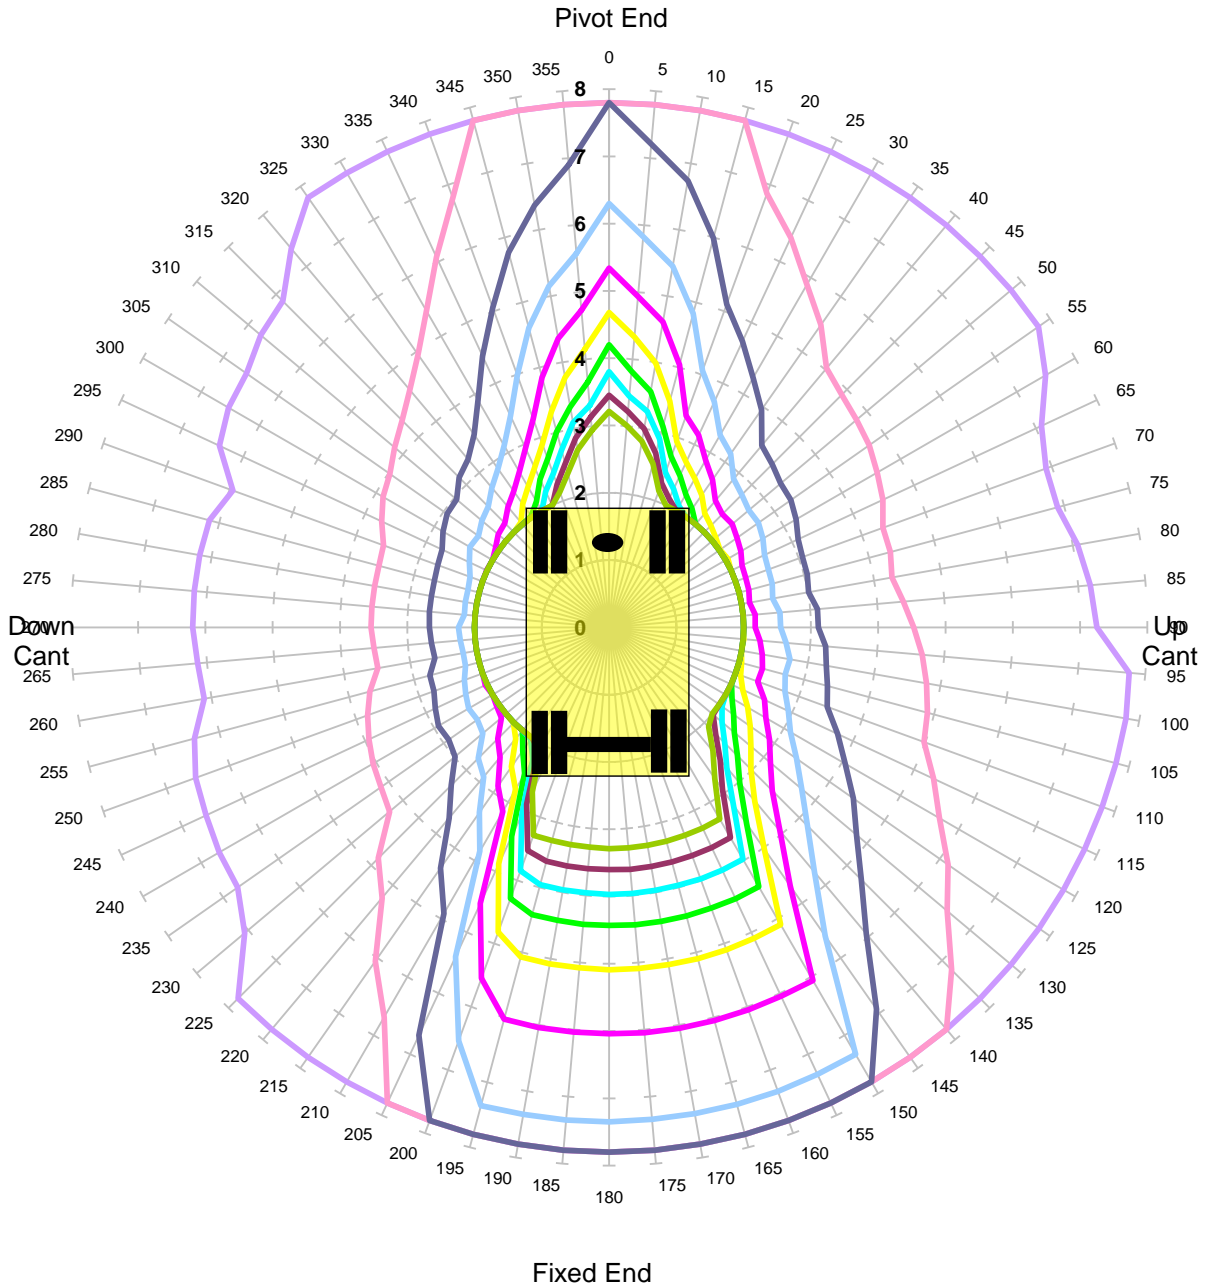


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 67.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant 150mm

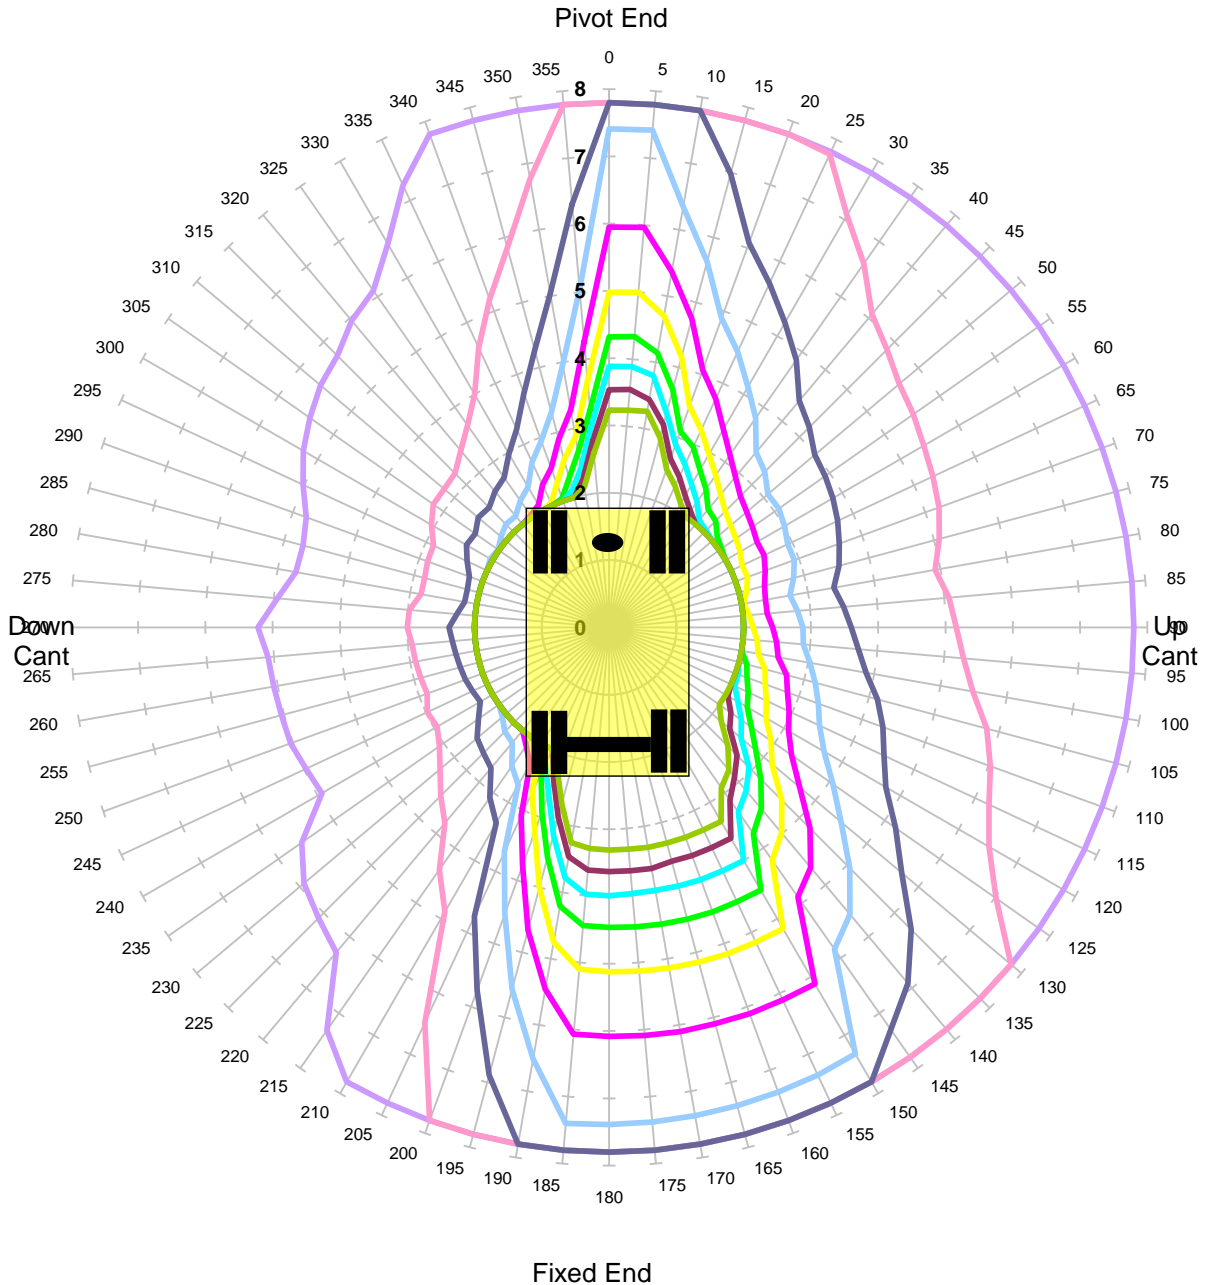


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 67.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant -150mm

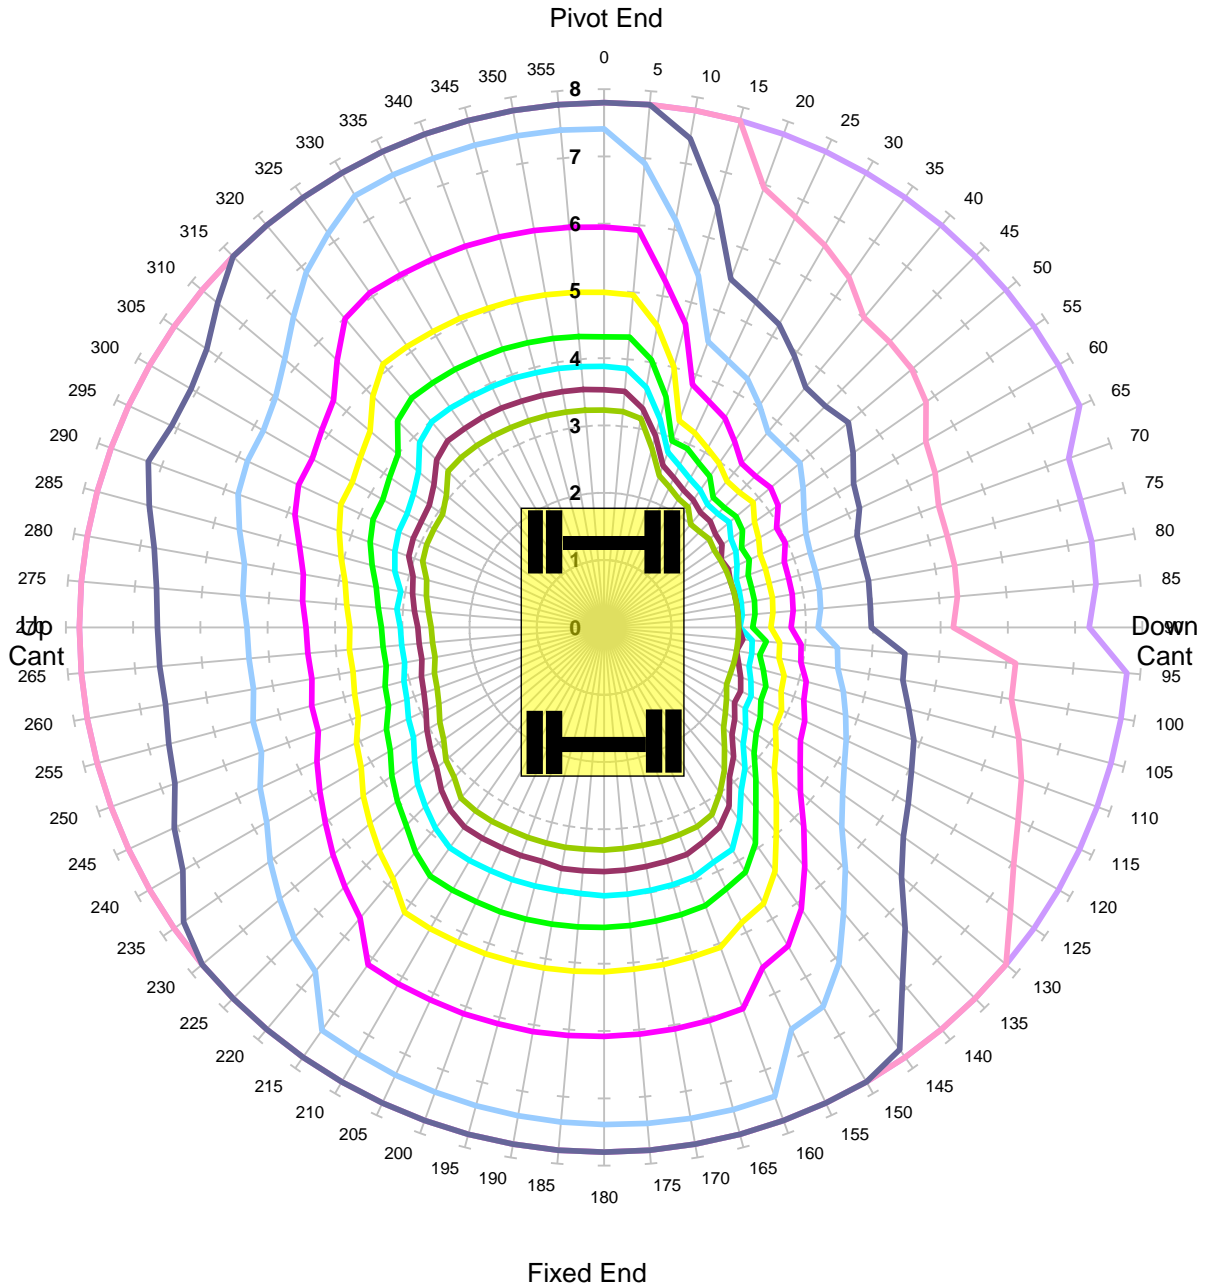


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 90.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant -50mm

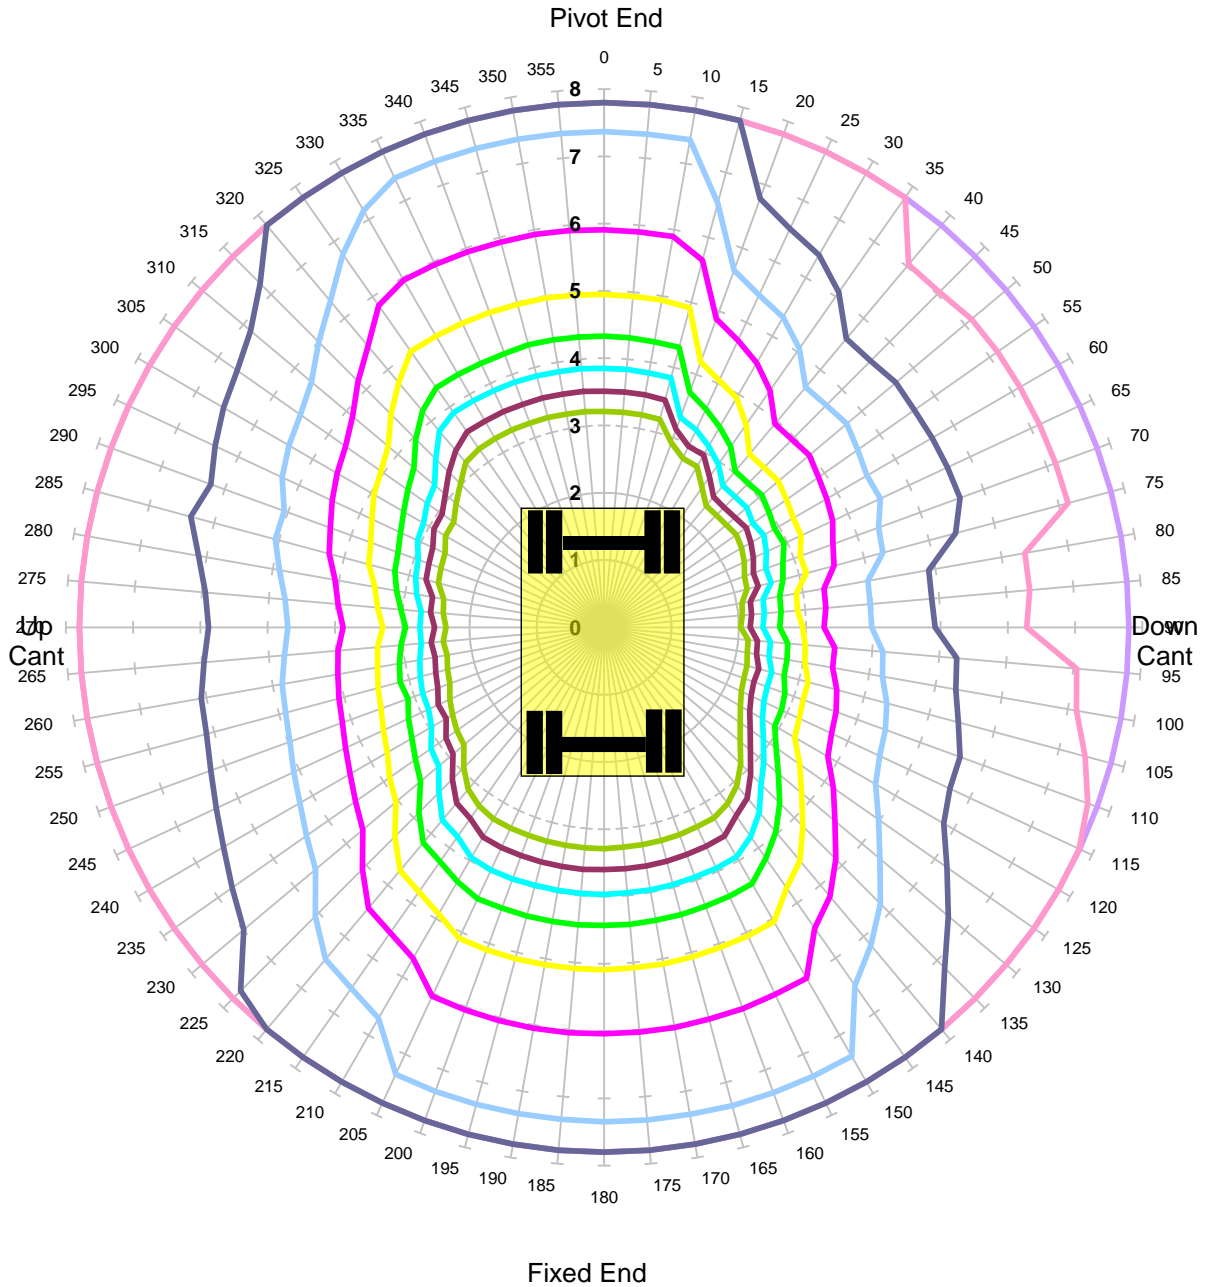


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 90.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant 50mm

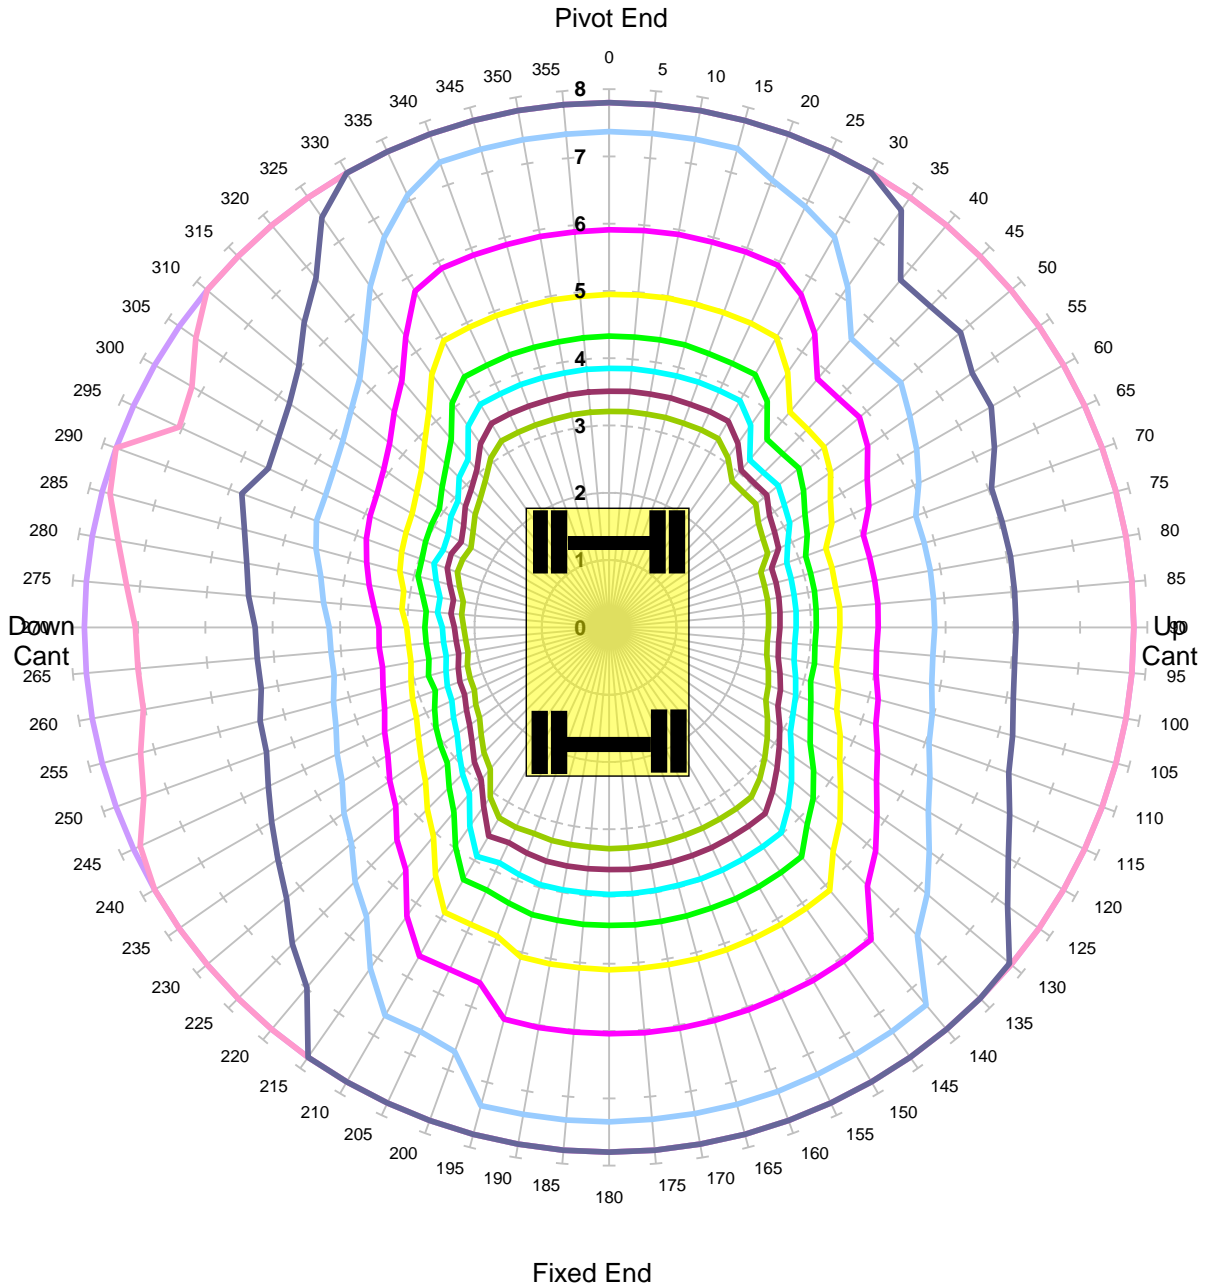


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 90.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant 150mm

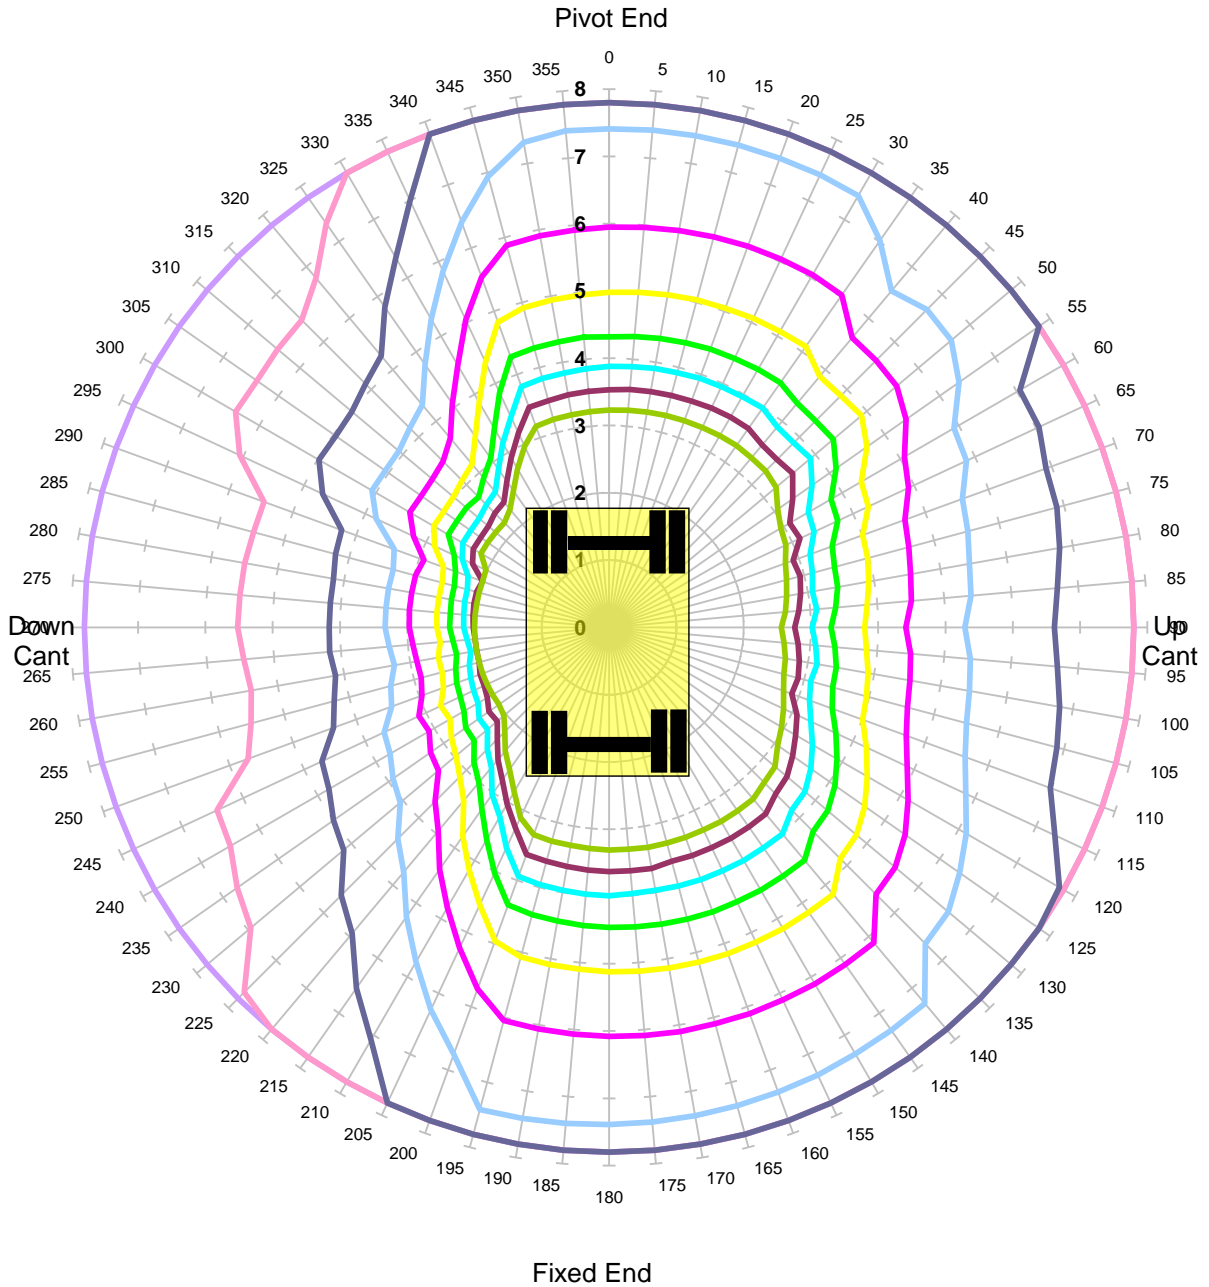


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 90.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift BP
Unlocked Road

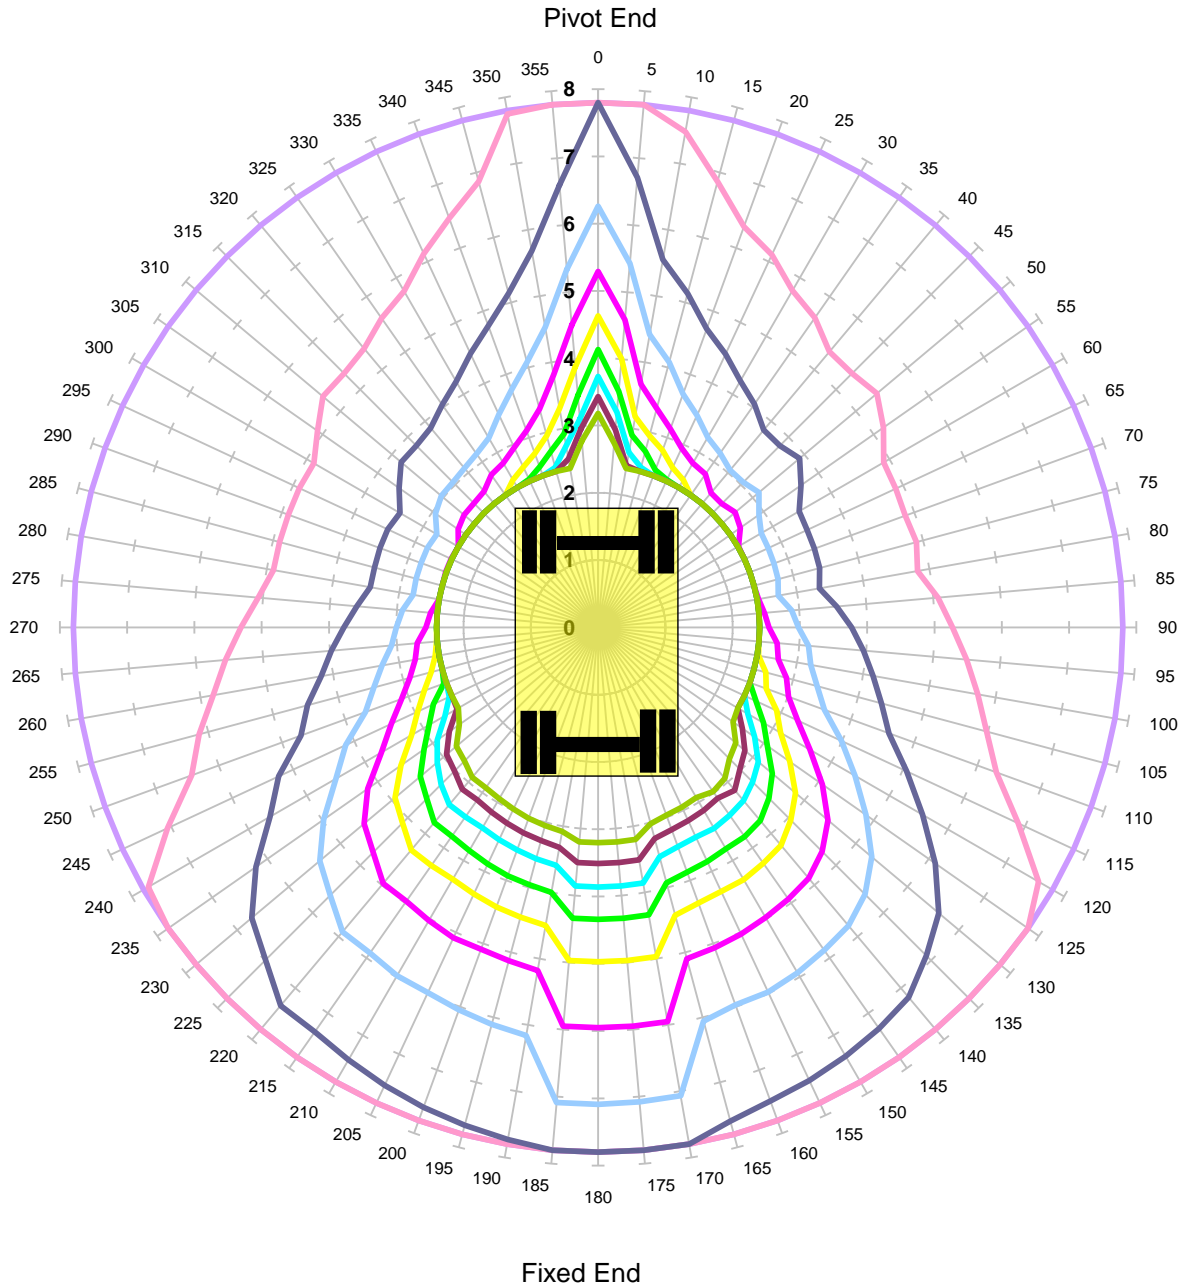


Units in Tonnes

- 1
 — 2
 — 3
 — 4
 — 5
 — 6
 — 7
 — 8
 — 9
 — 10


| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 71.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift BP
Locked Road

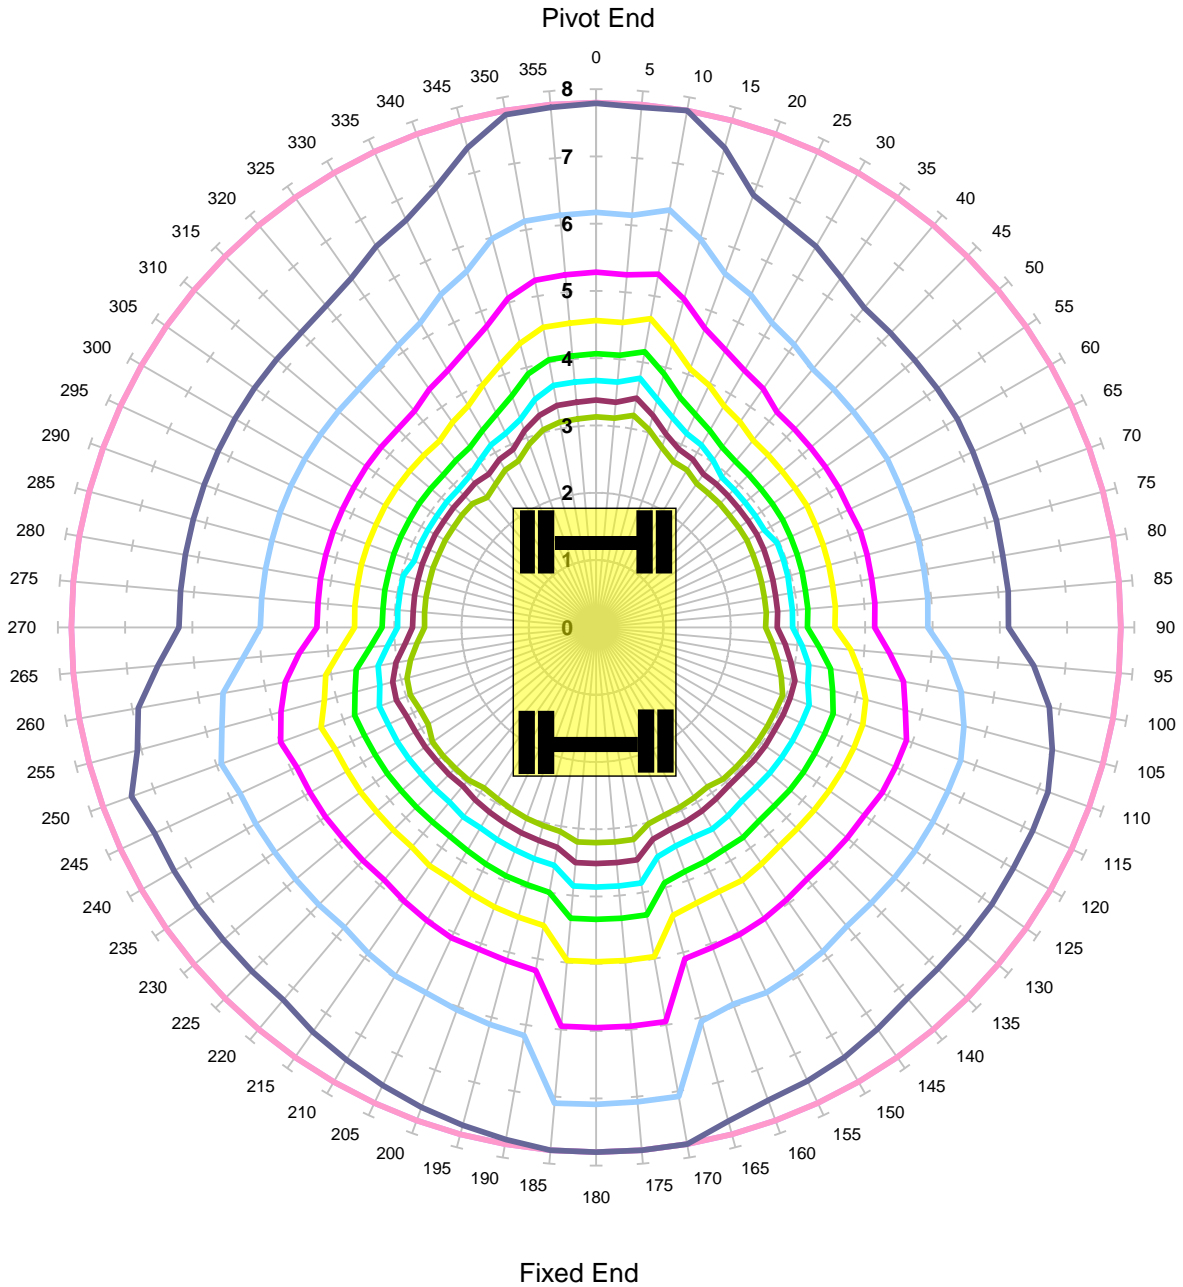

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 71.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant -150mm - Tandem Lift

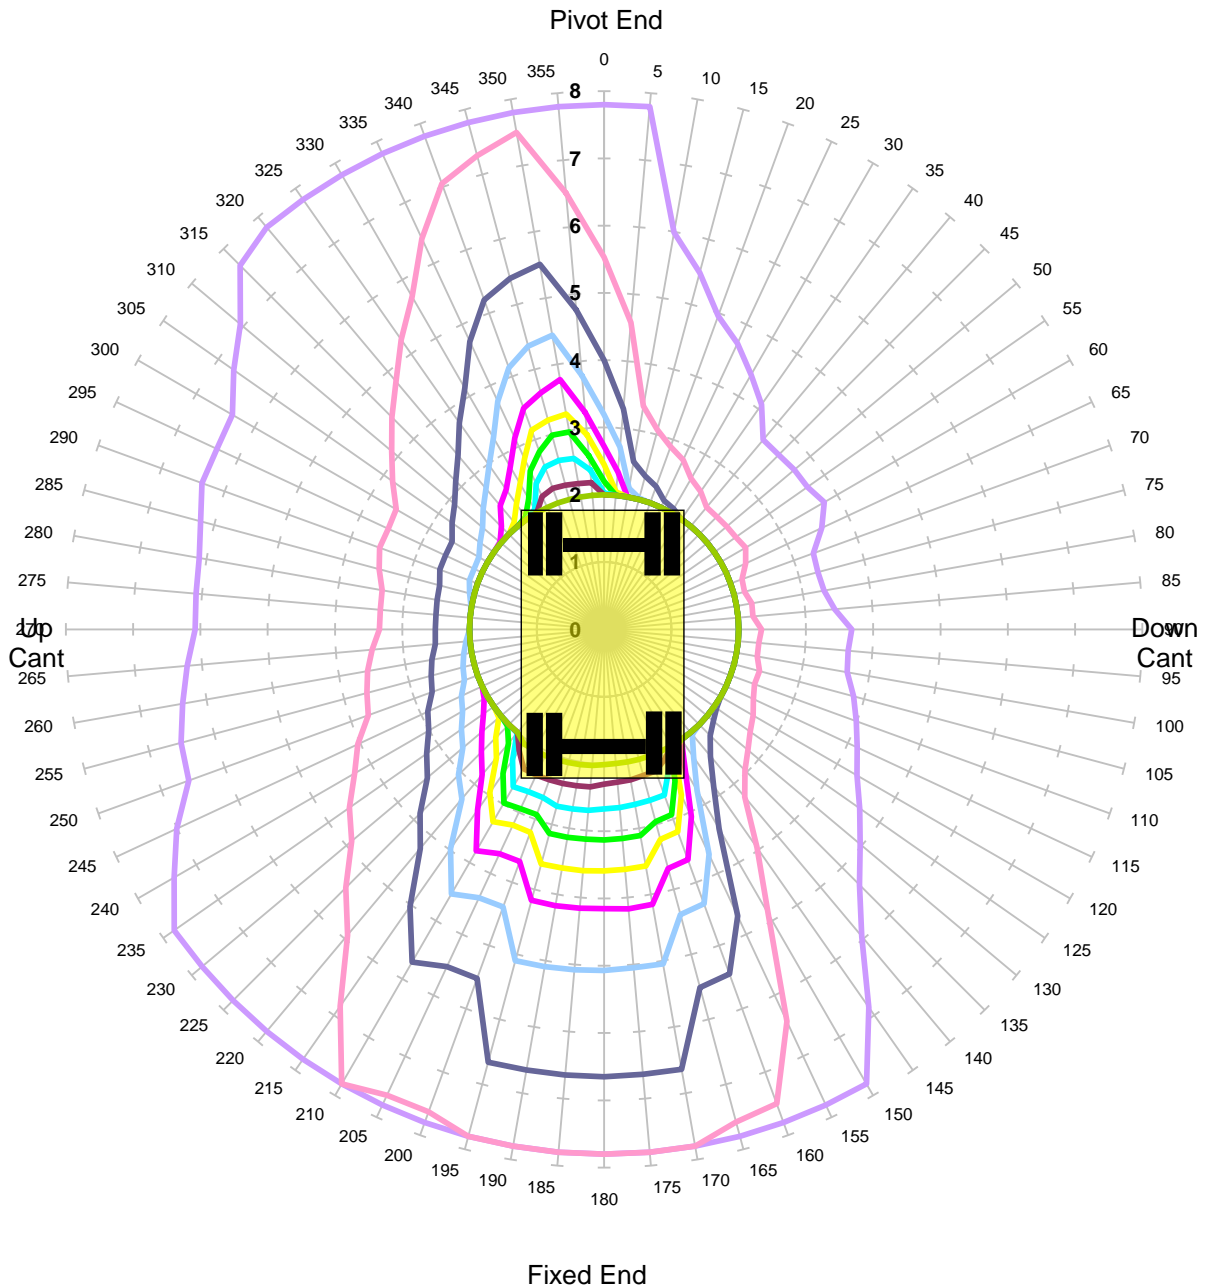


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 44.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant -50mm - Tandem Lift

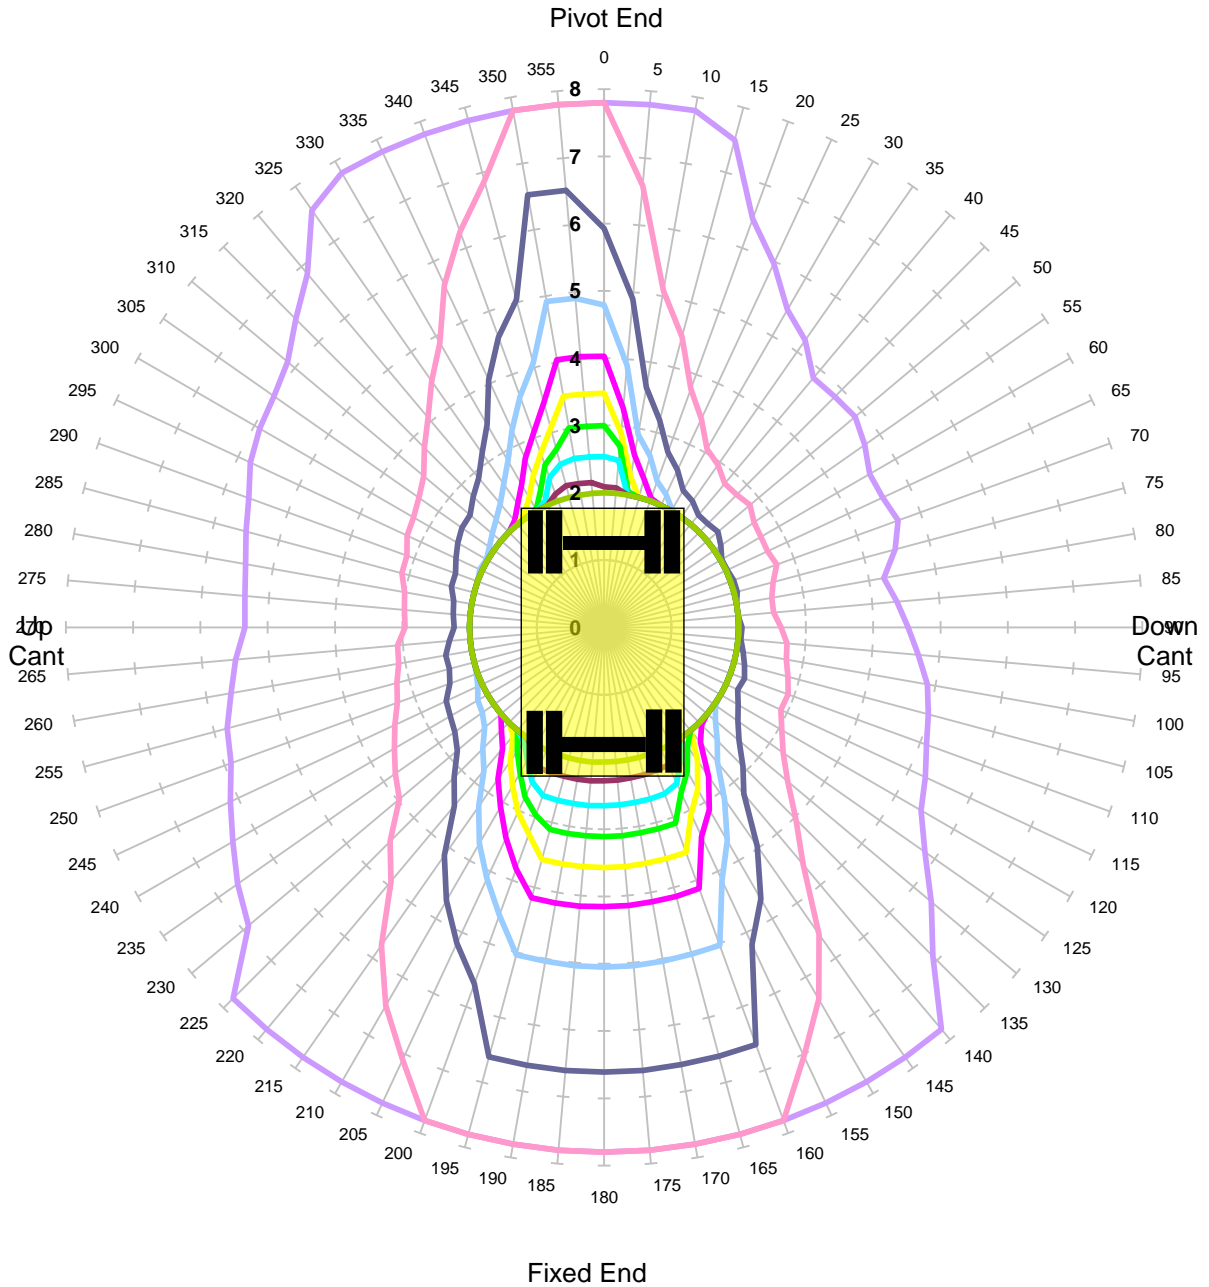


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 44.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant 50mm - Tandem Lift

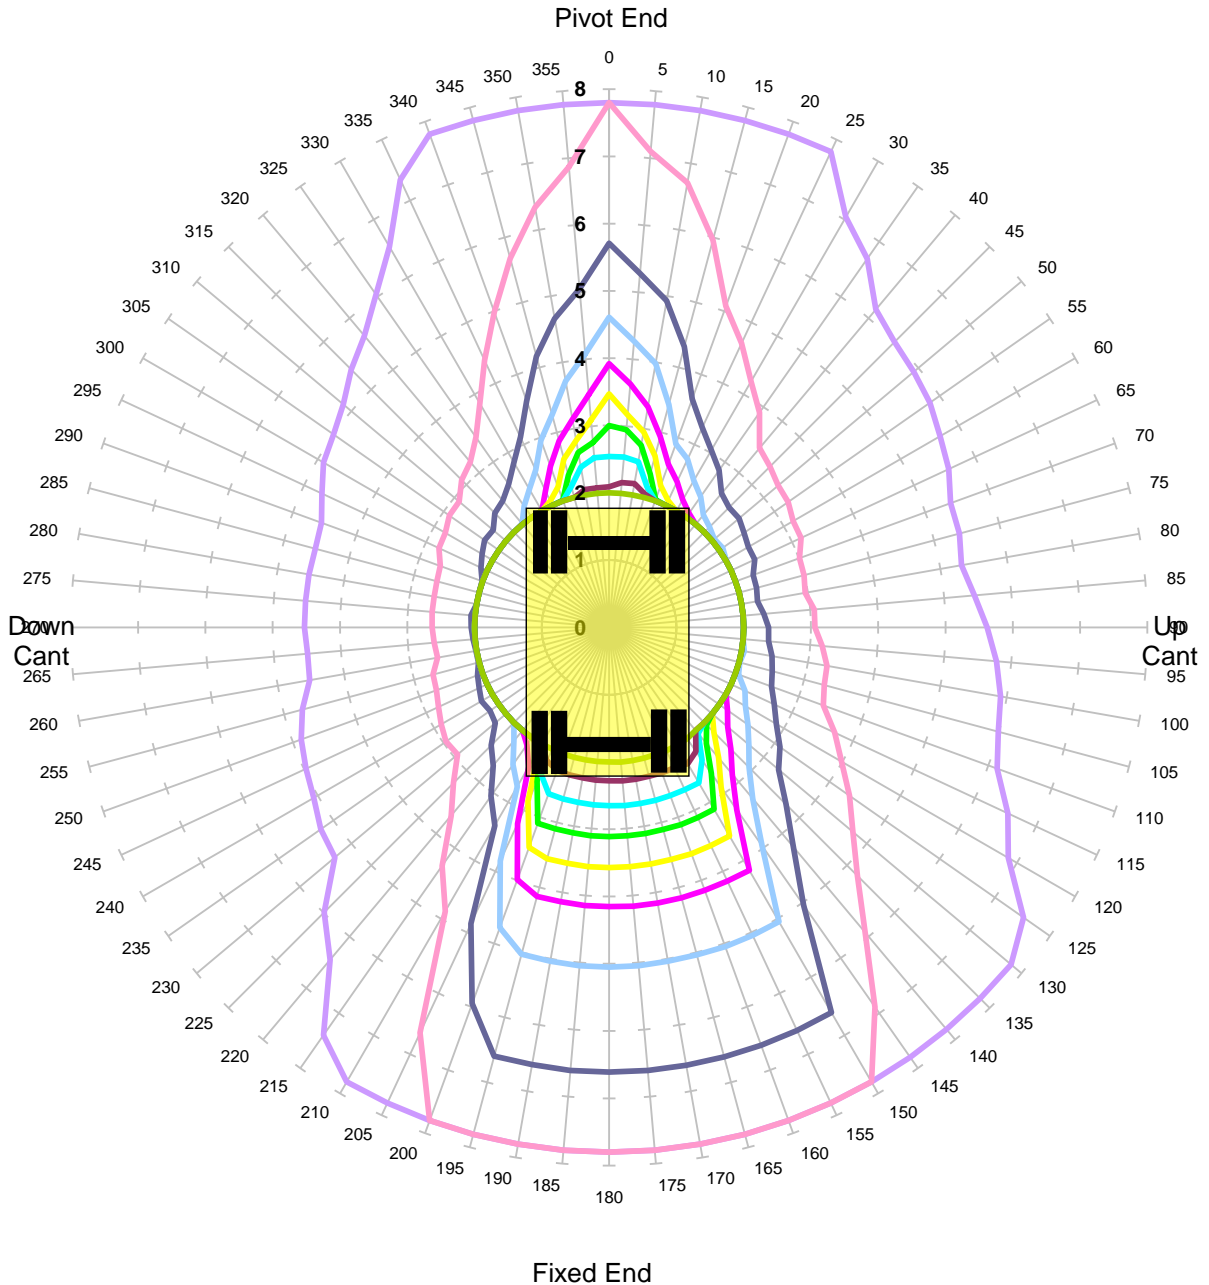


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 44.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant 150mm - Tandem Lift

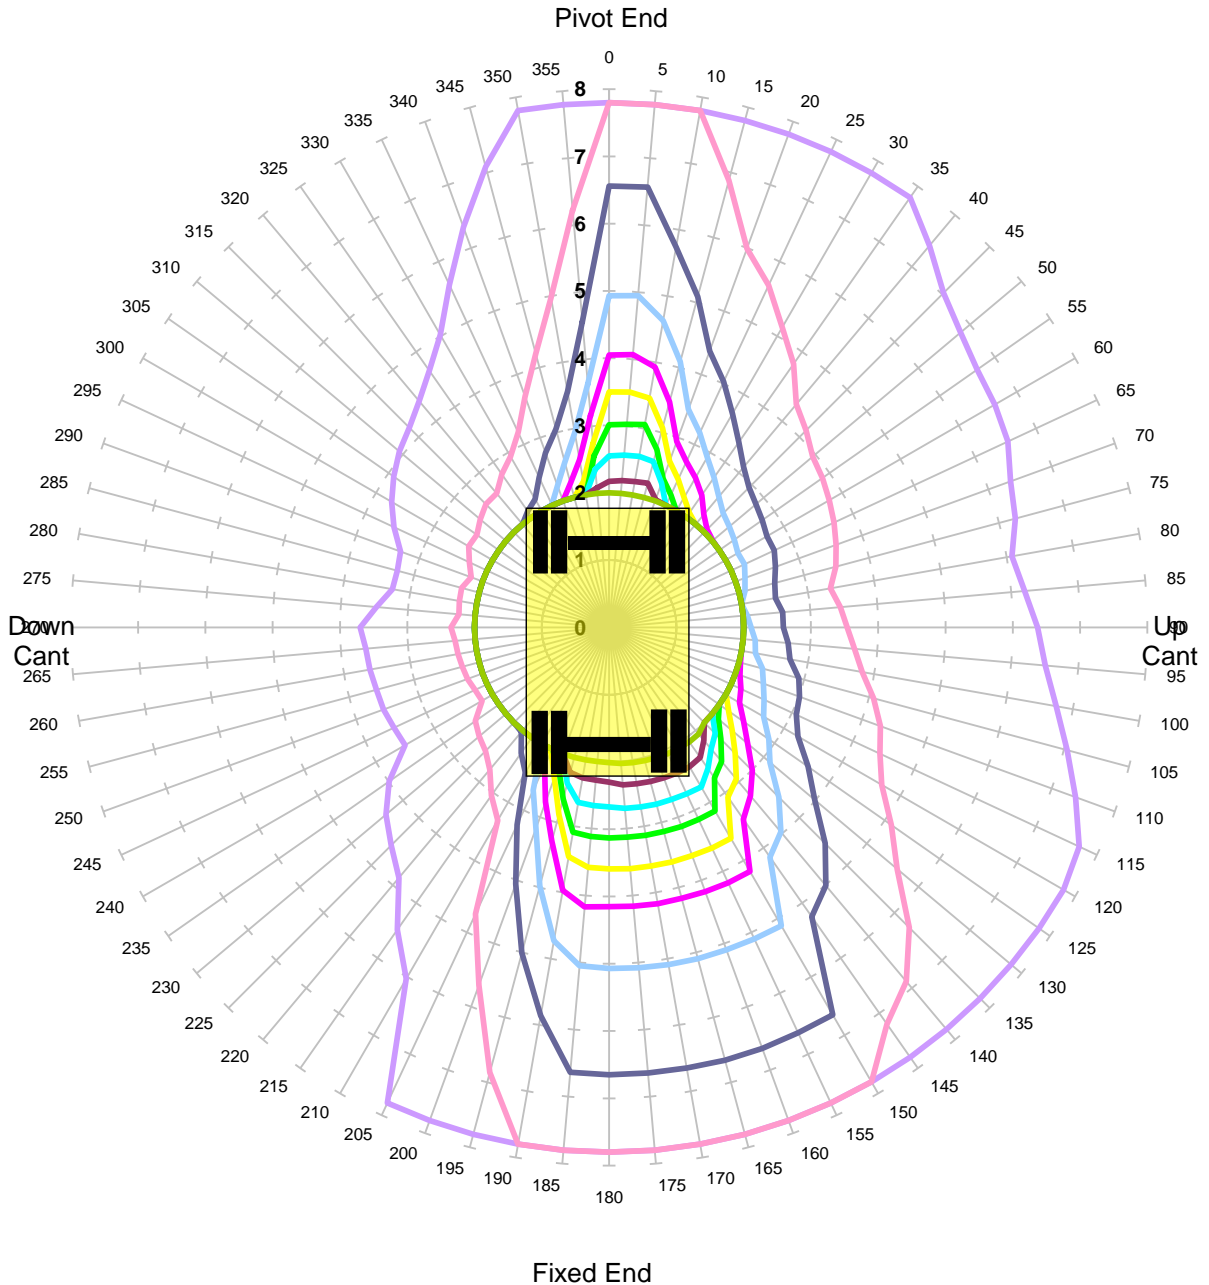


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 44.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant -150mm - Tandem Lift

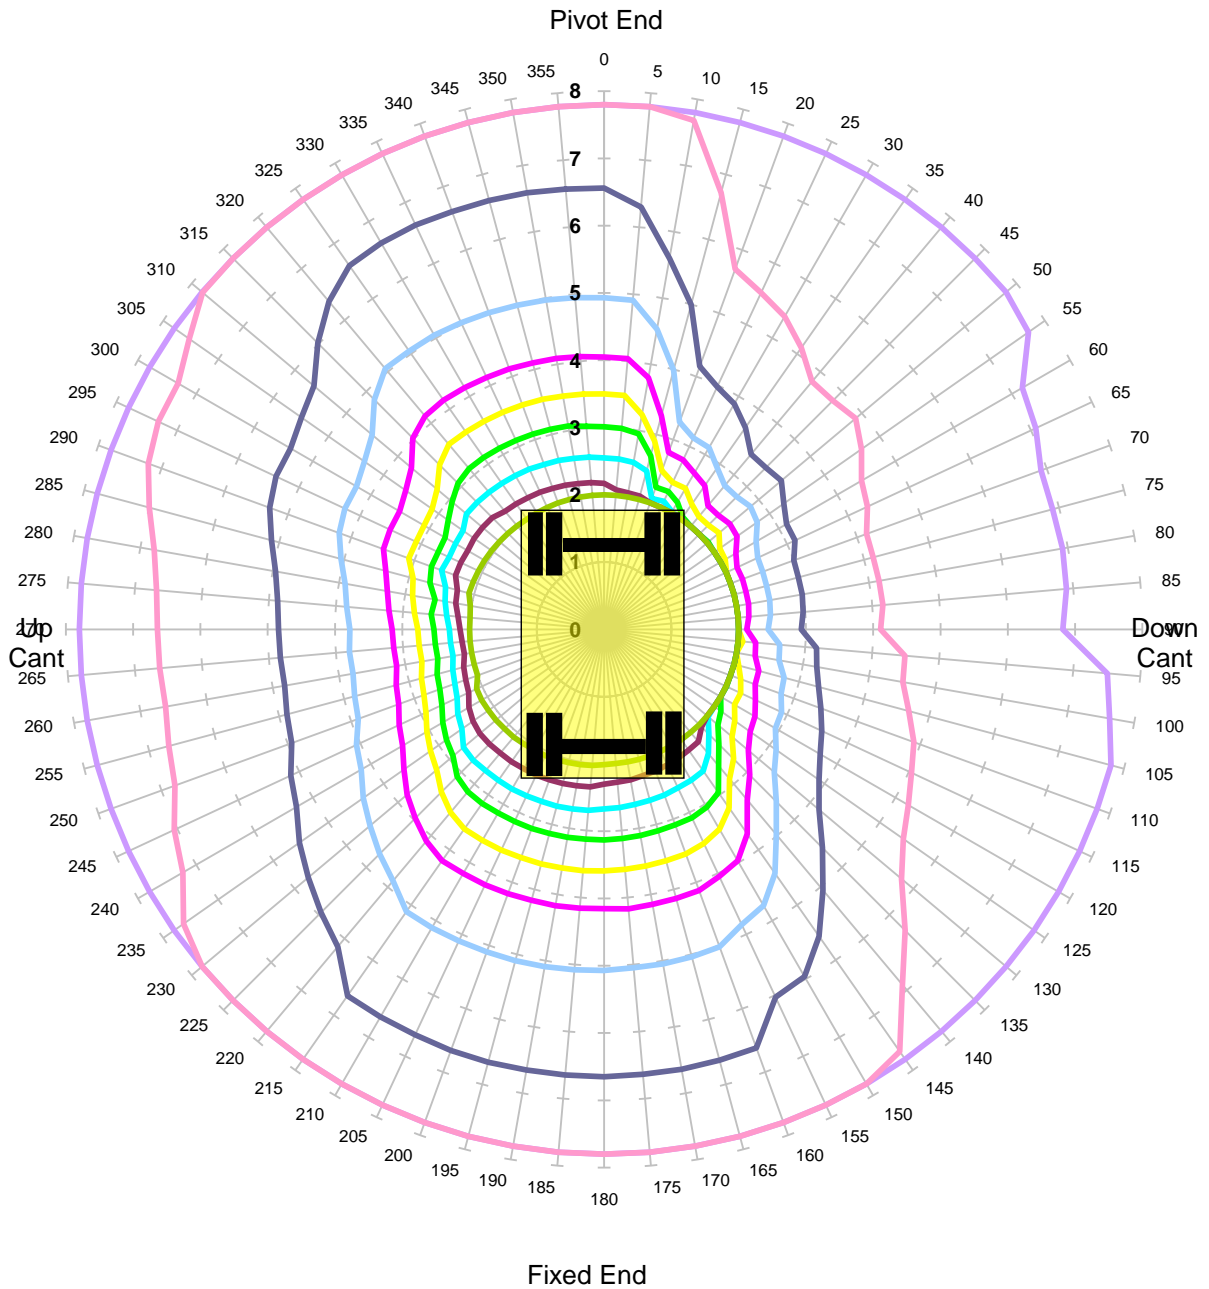


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 59.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant -50mm - Tandem Lift

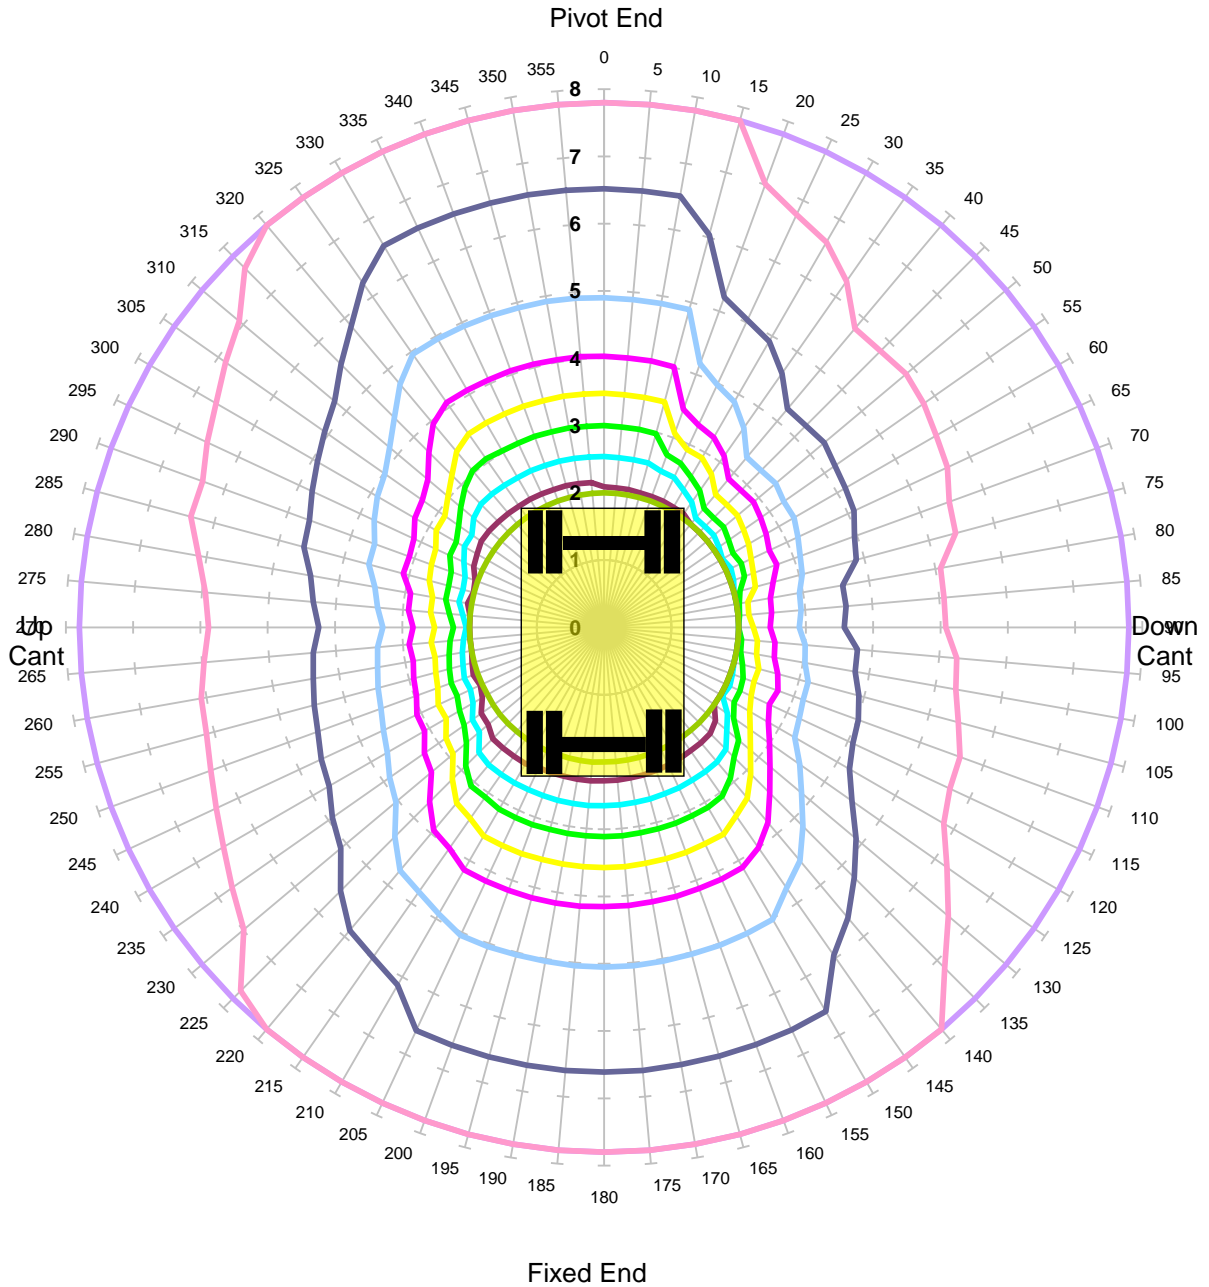


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 59.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant 50mm - Tandem Lift

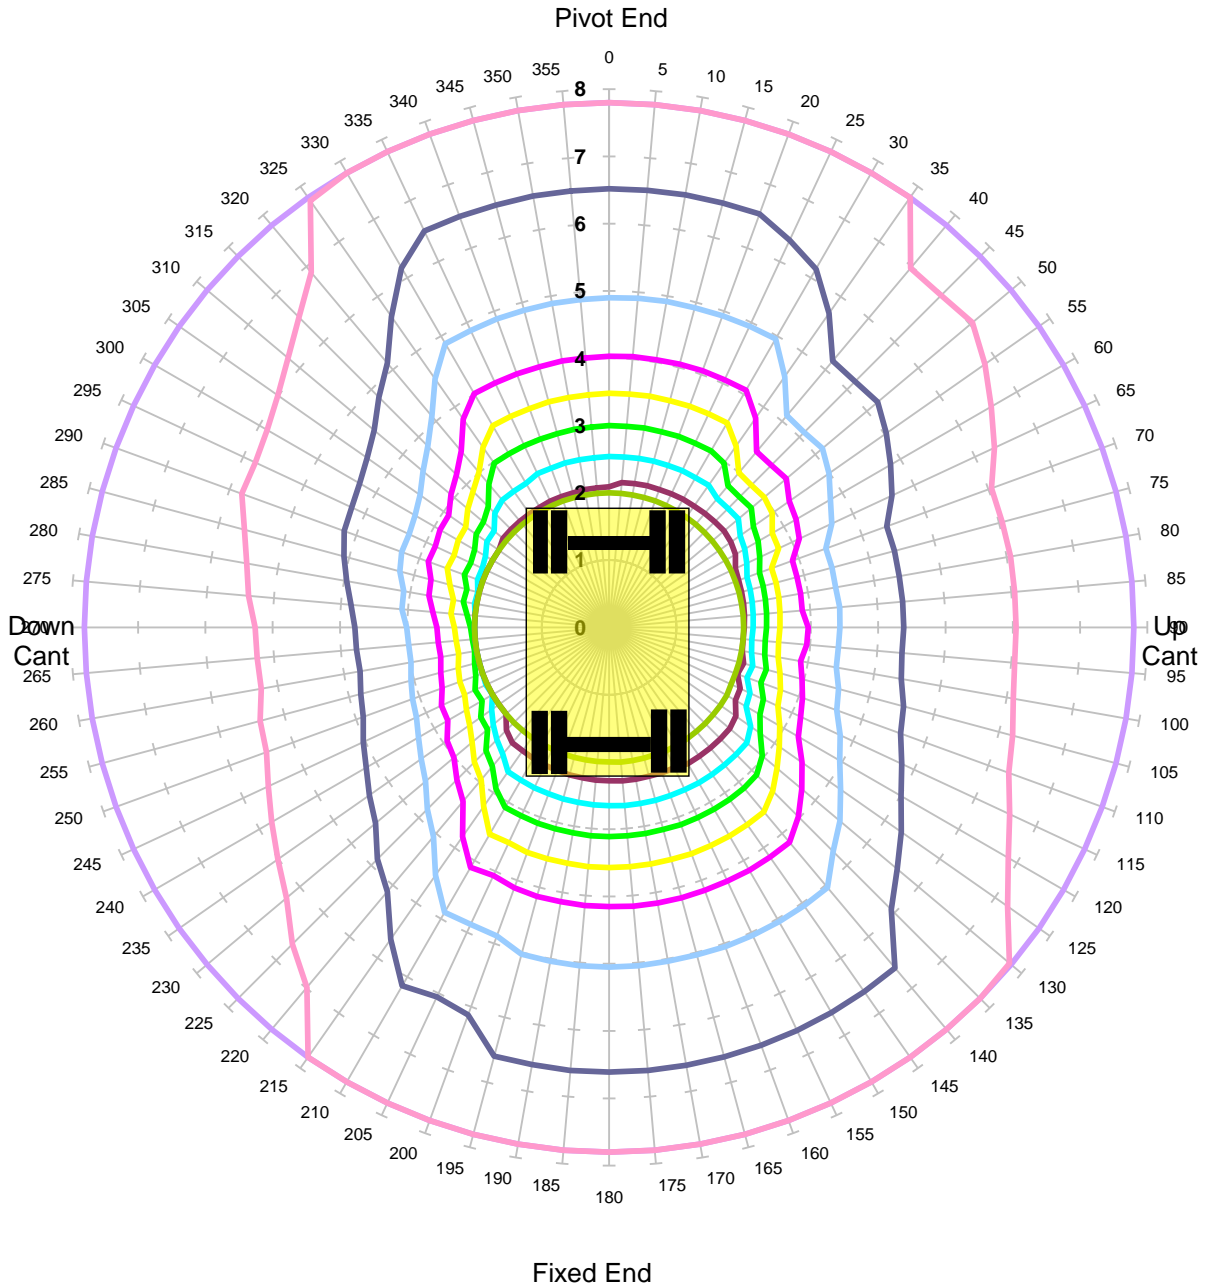


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 59.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant 150mm - Tandem Lift

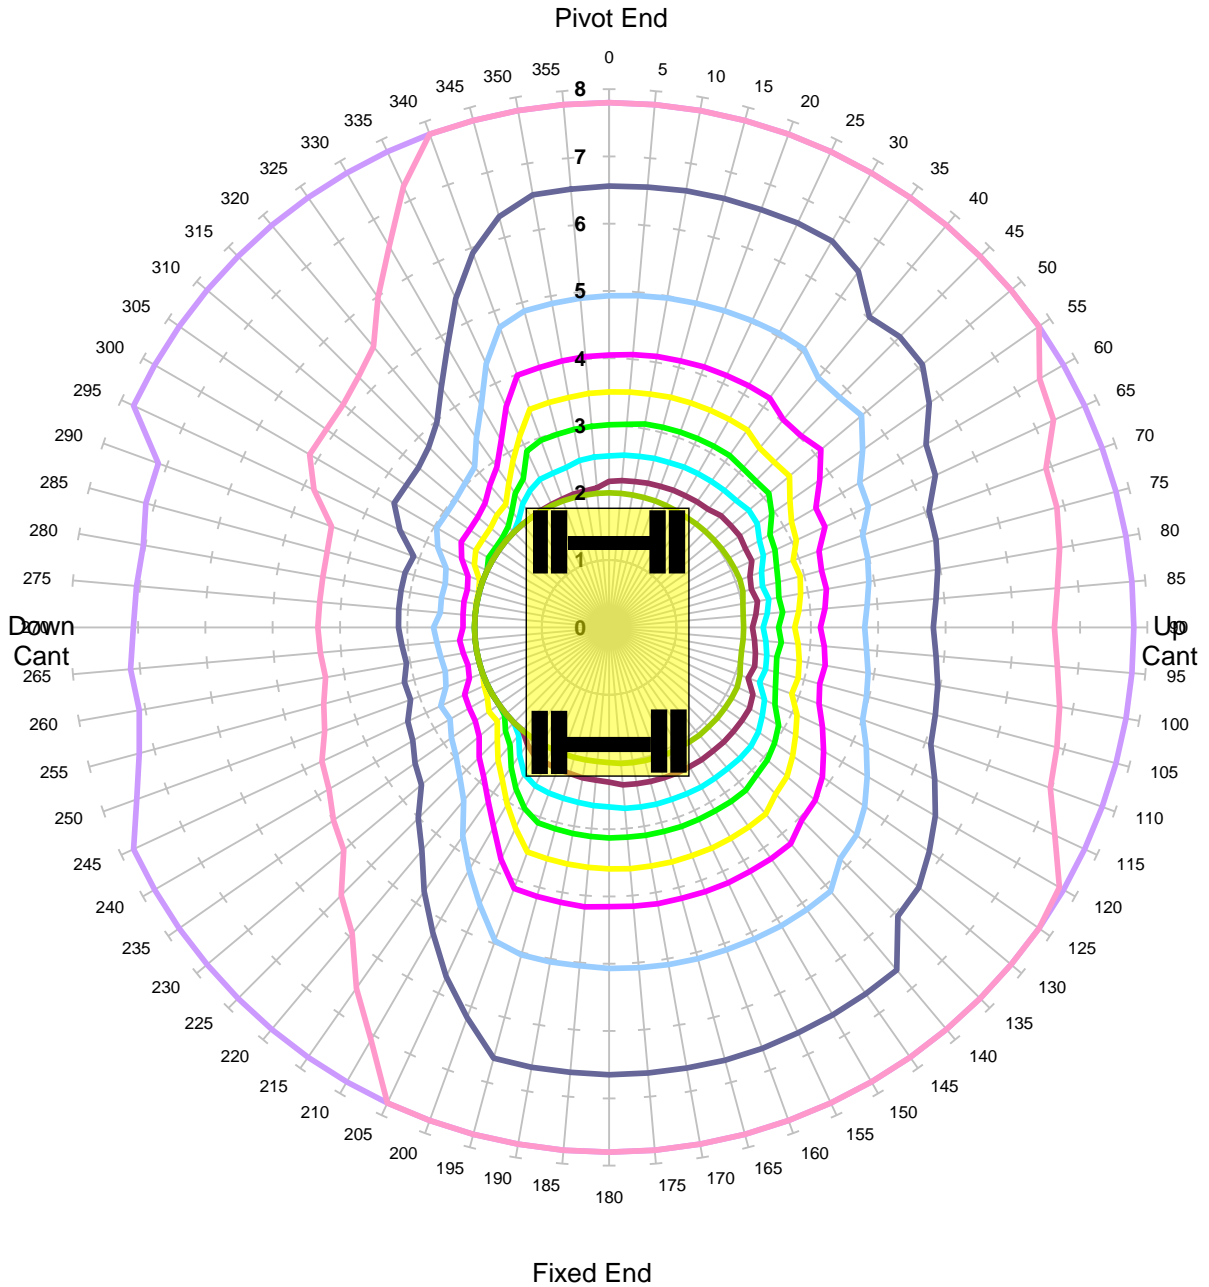


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 59.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift BP
Unlocked Road - Tandem Lift

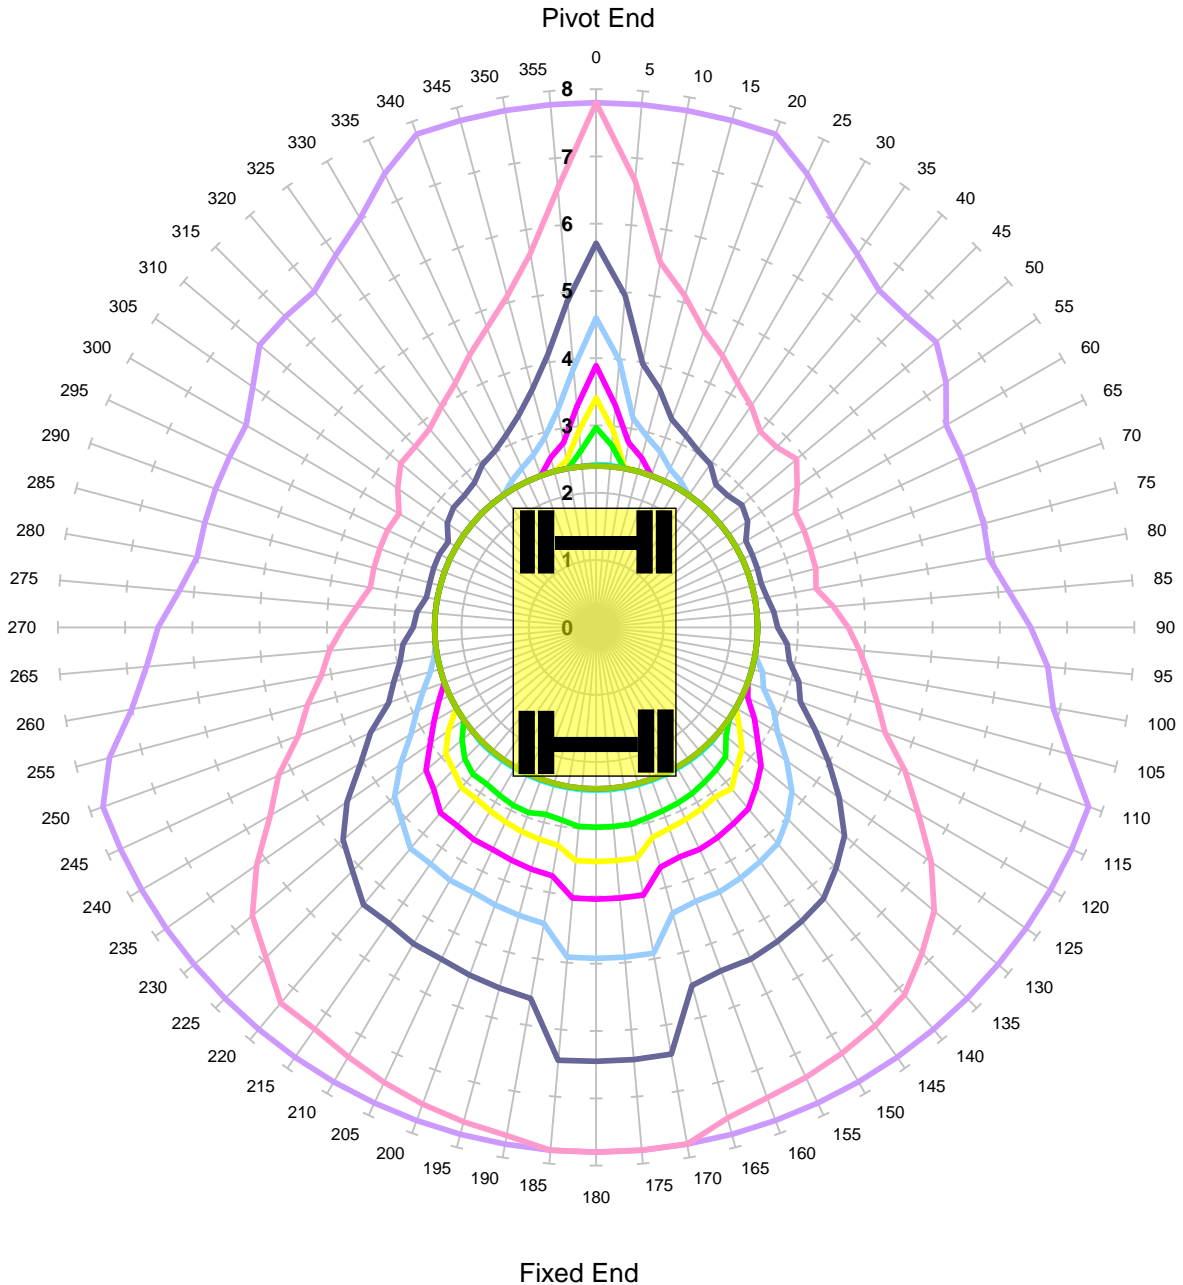


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 47.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift BP
Locked Road - Tandem Lift

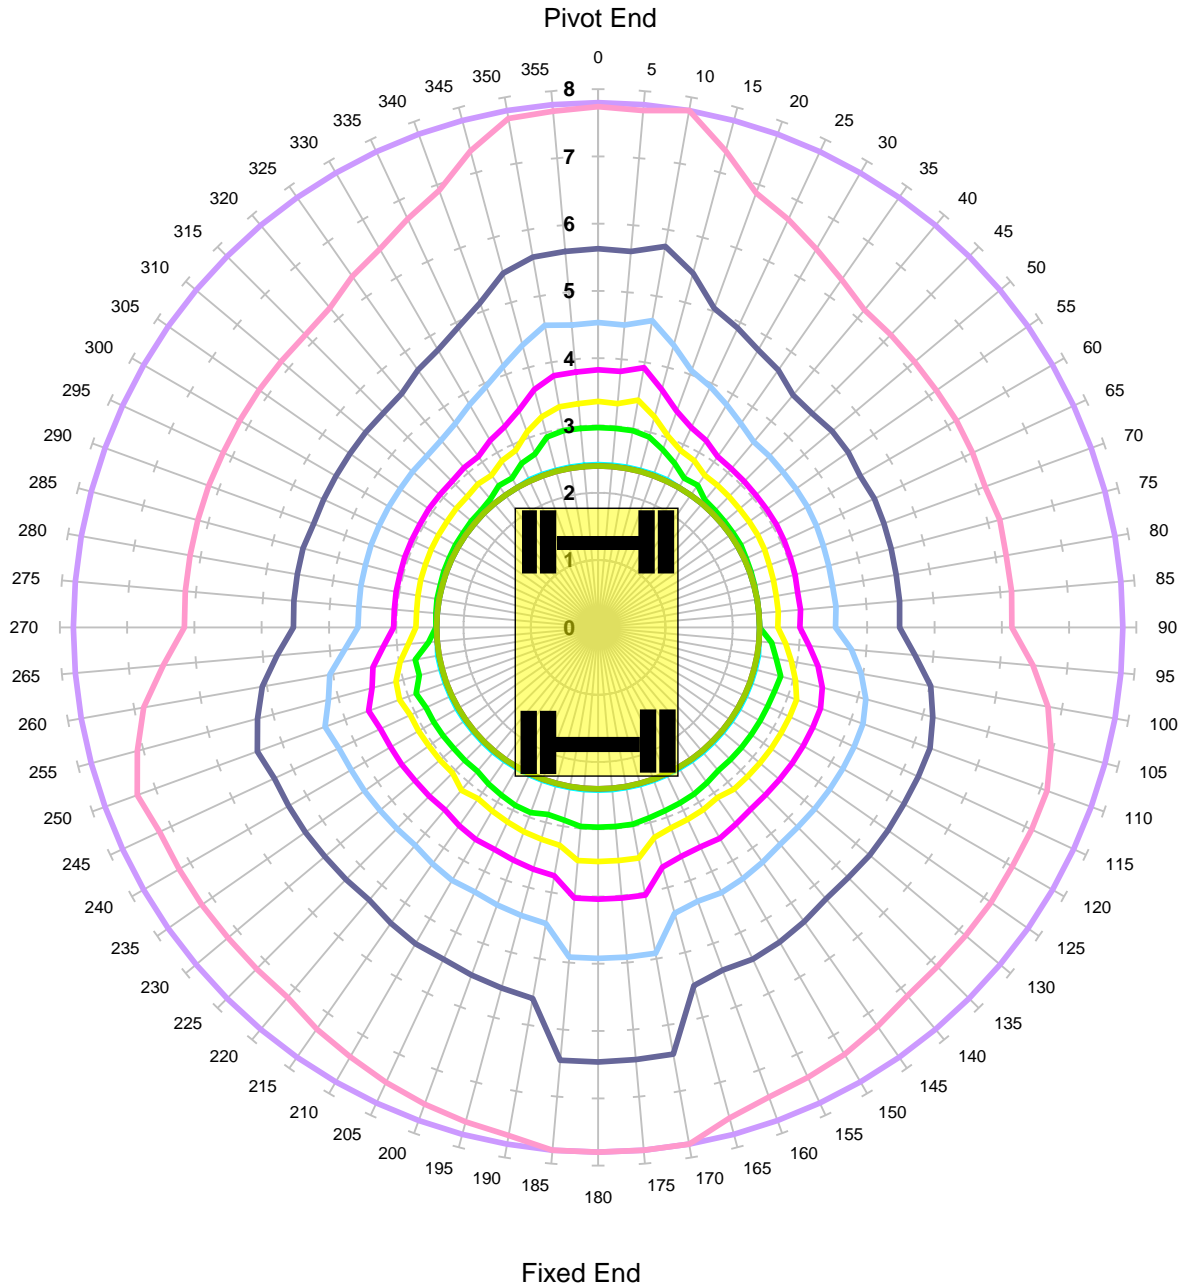


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 47.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Unlocked Rail Cant -150mm

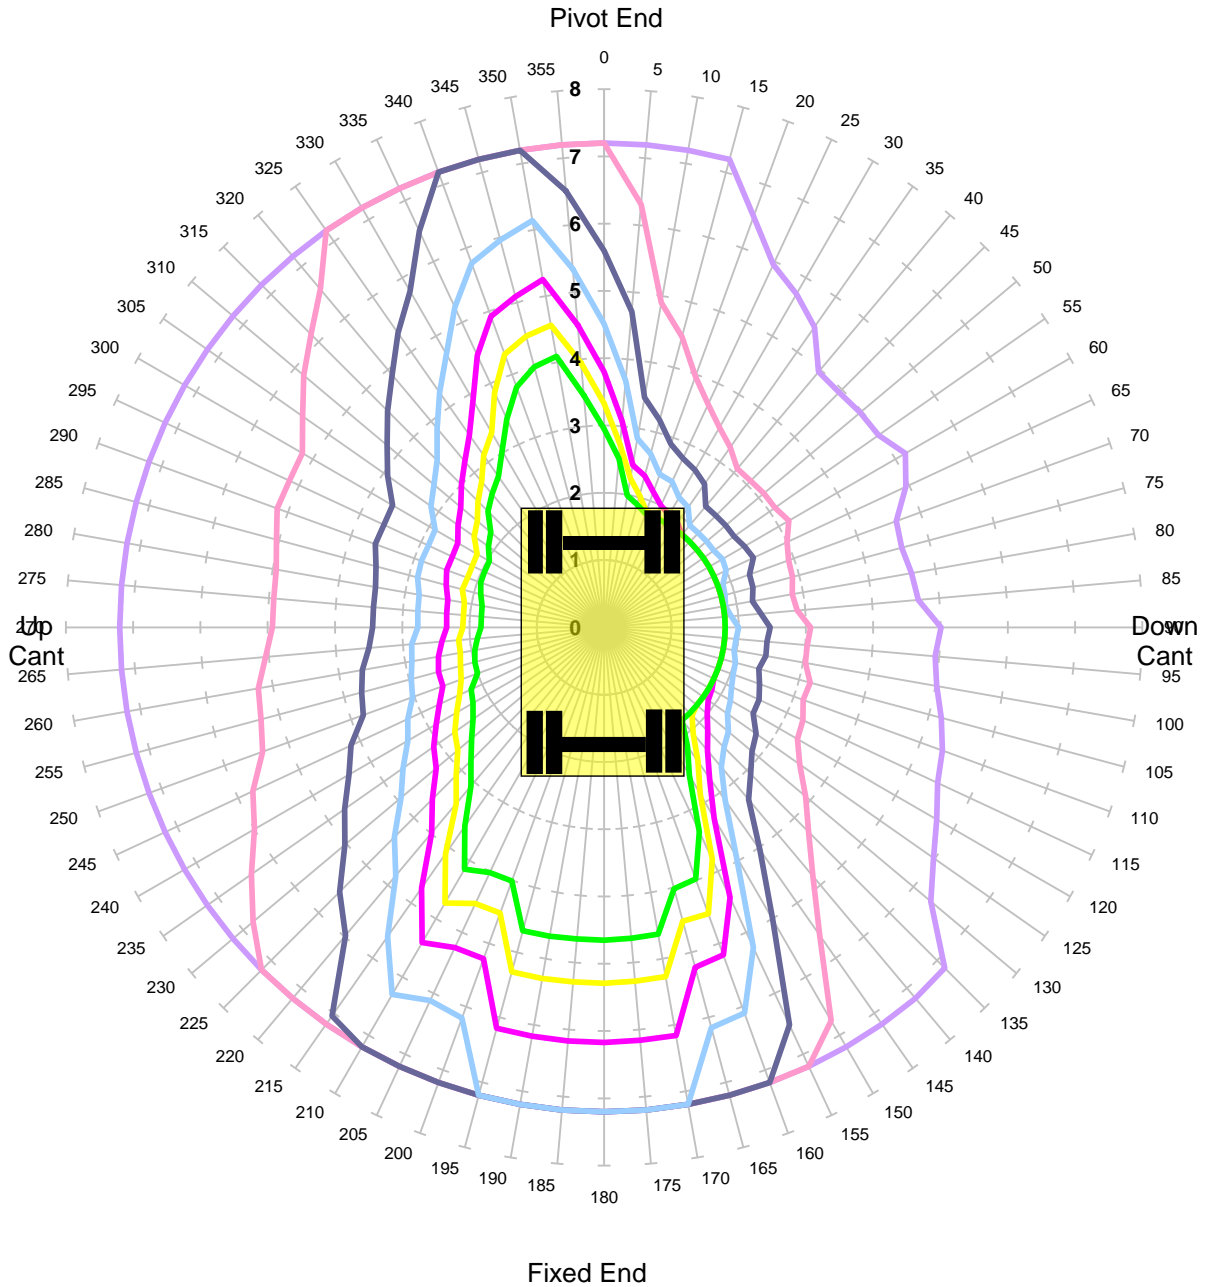


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 67.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Unlocked Rail Cant -50mm

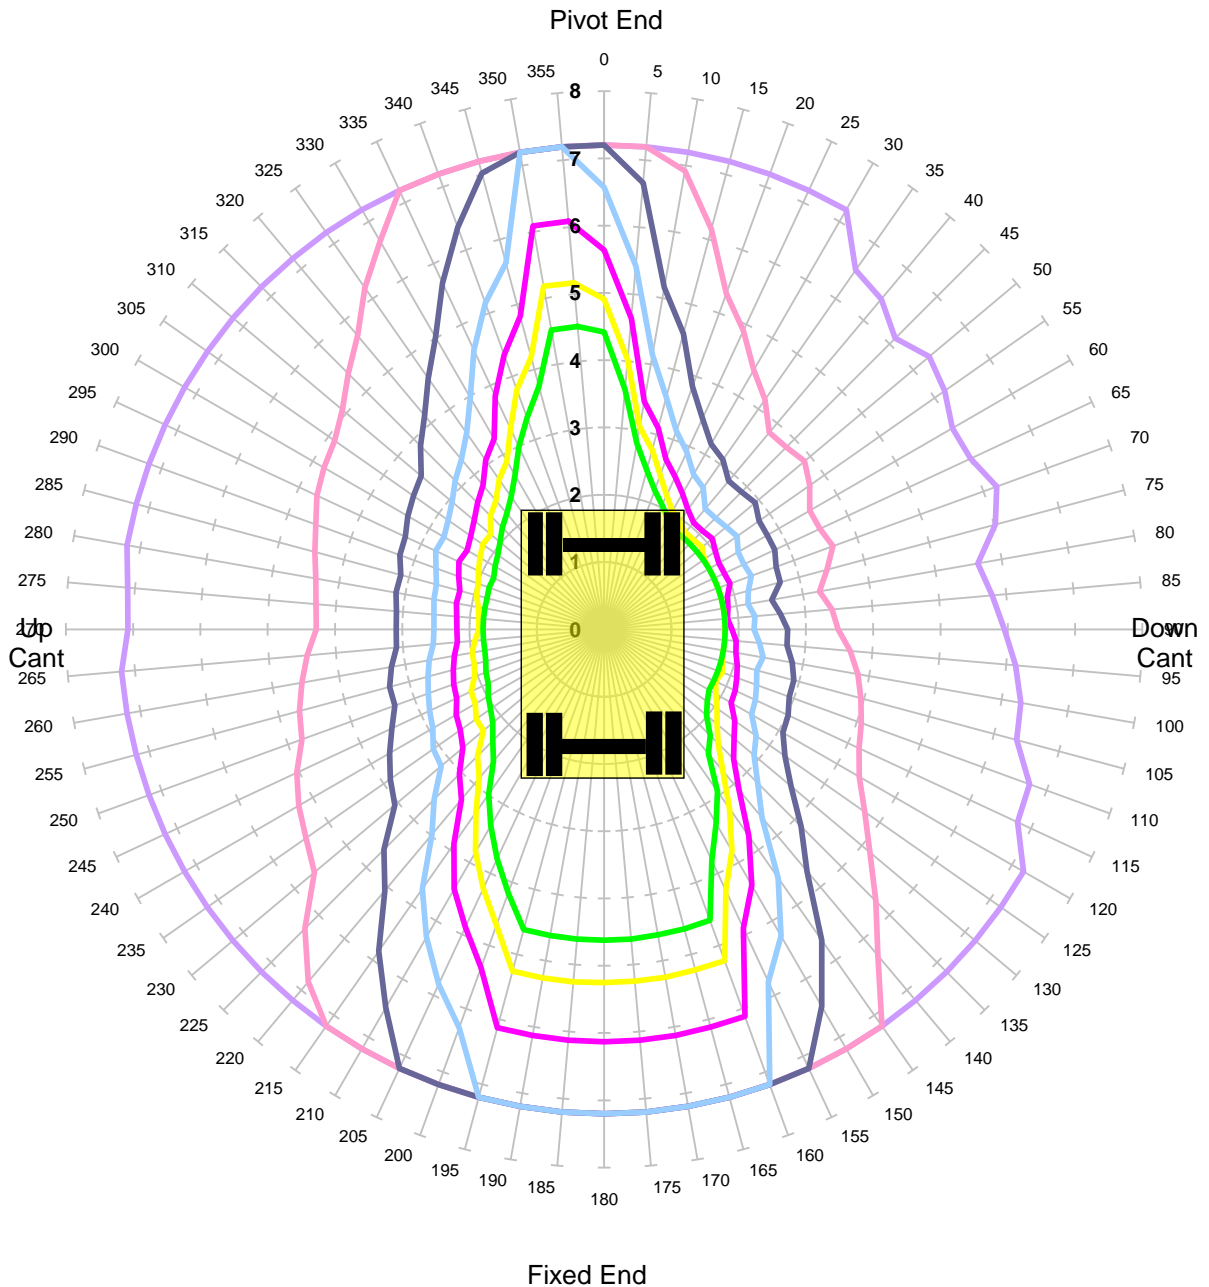


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 67.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Unlocked Rail Cant 50mm

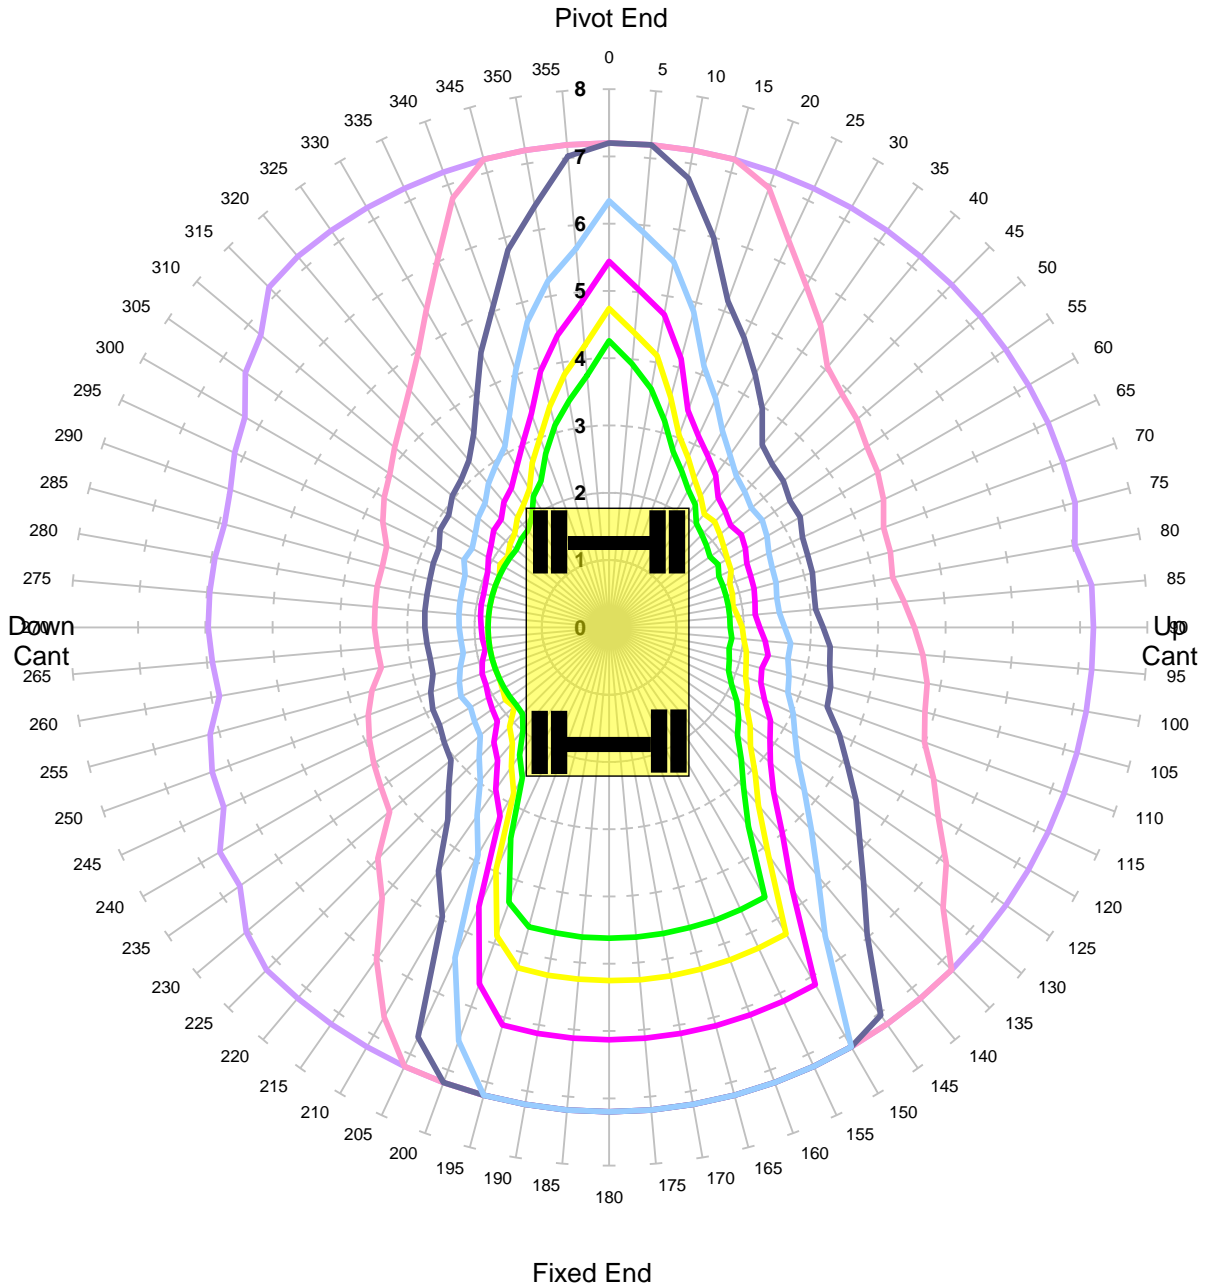


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 67.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Unlocked Rail Cant 150mm

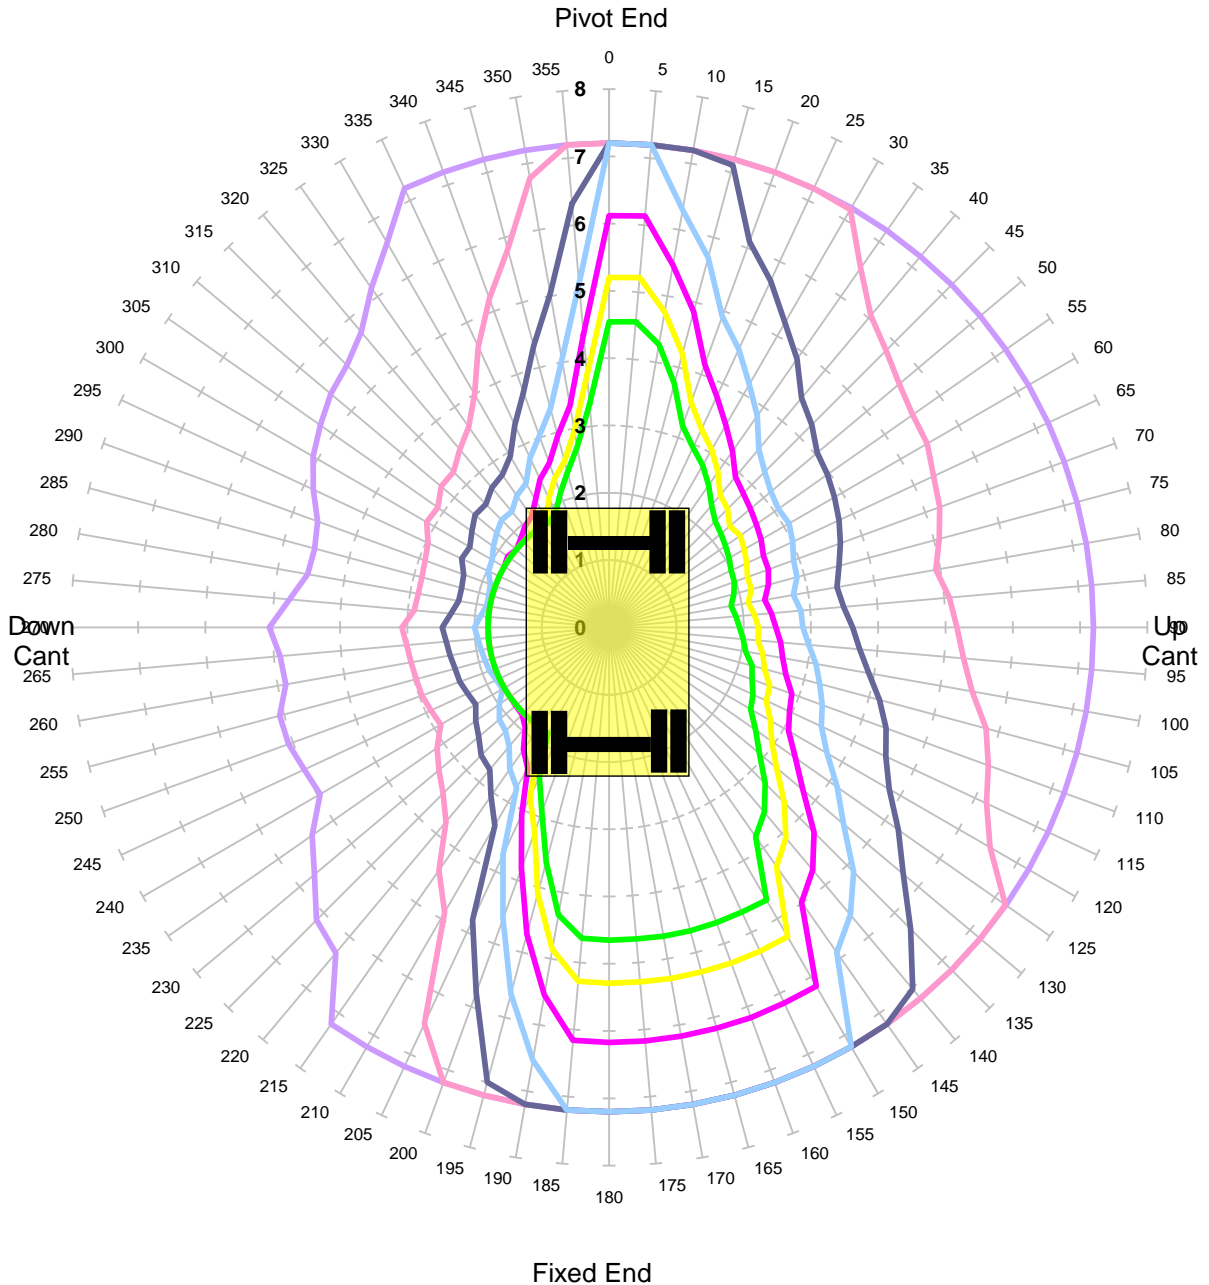


Units in Tonnes

- 1
 — 2
 — 3
 — 4
 — 5
 — 6
 — 7

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 67.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Locked Rail Cant -150mm

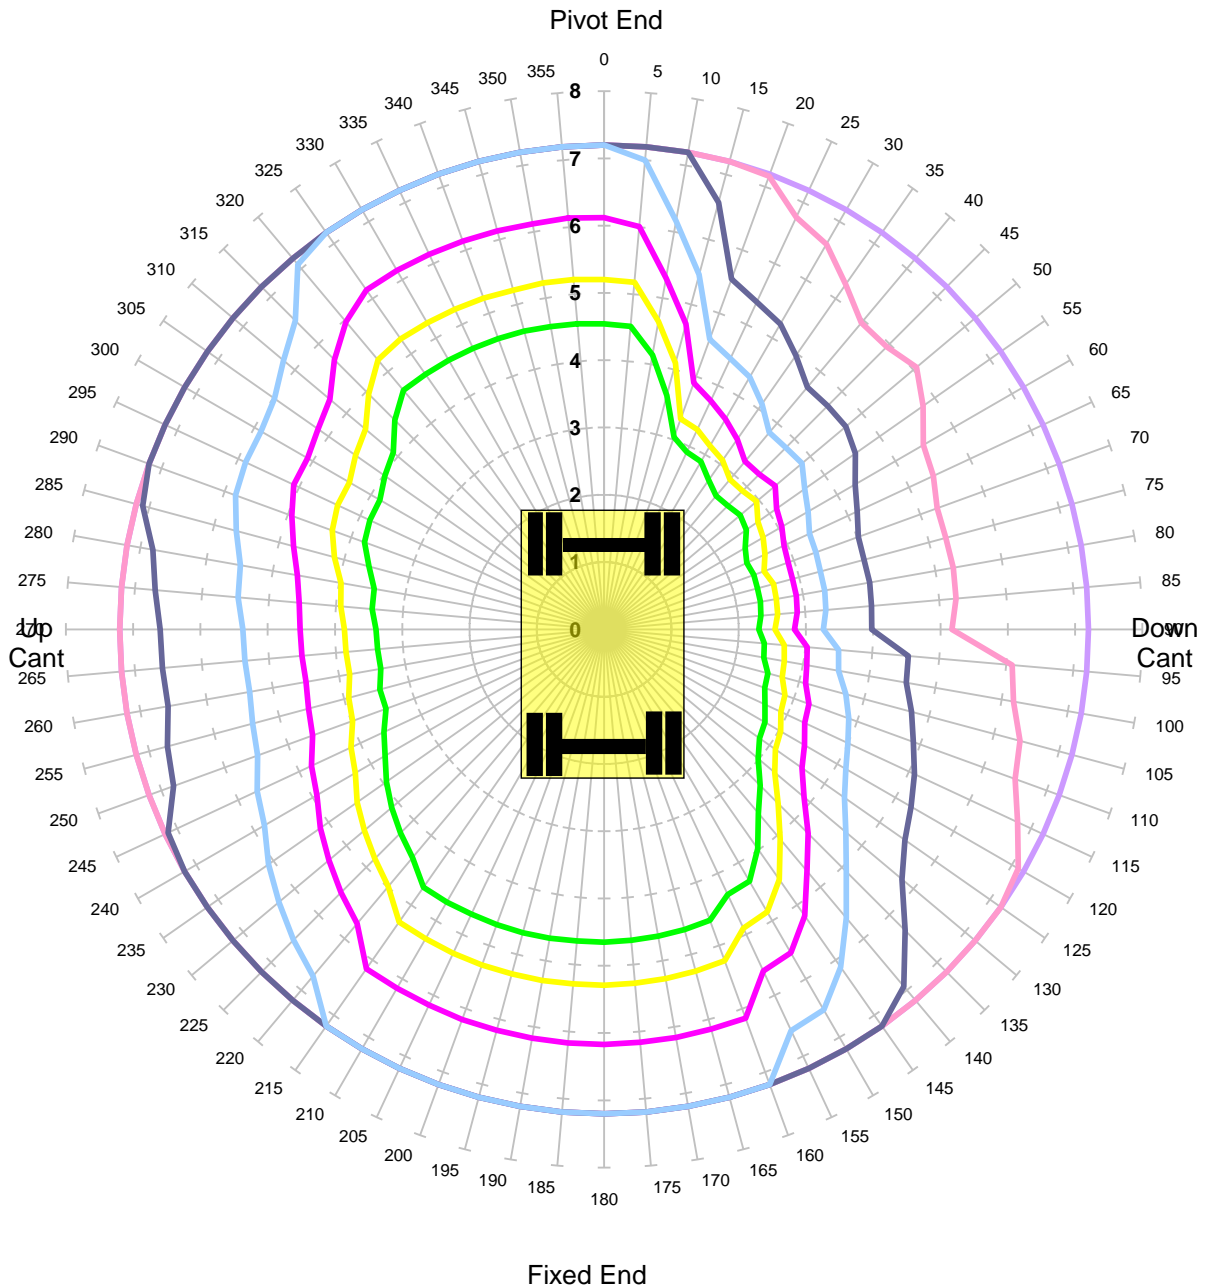


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 90.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Locked Rail Cant -50mm

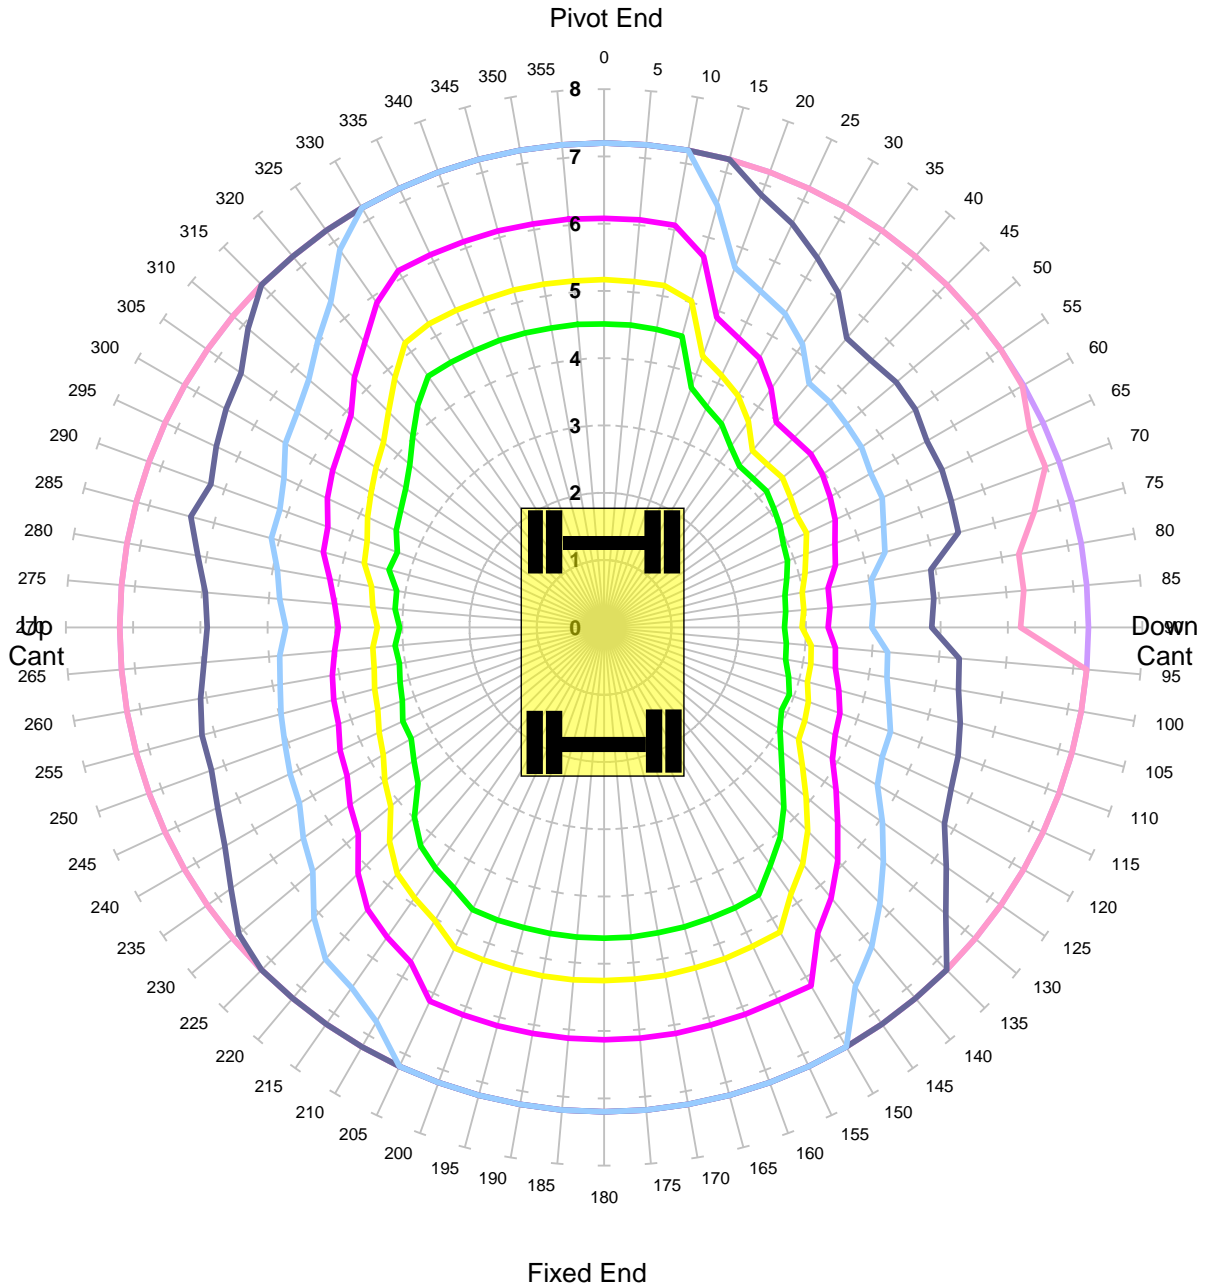


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 90.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Locked Rail Cant 50mm

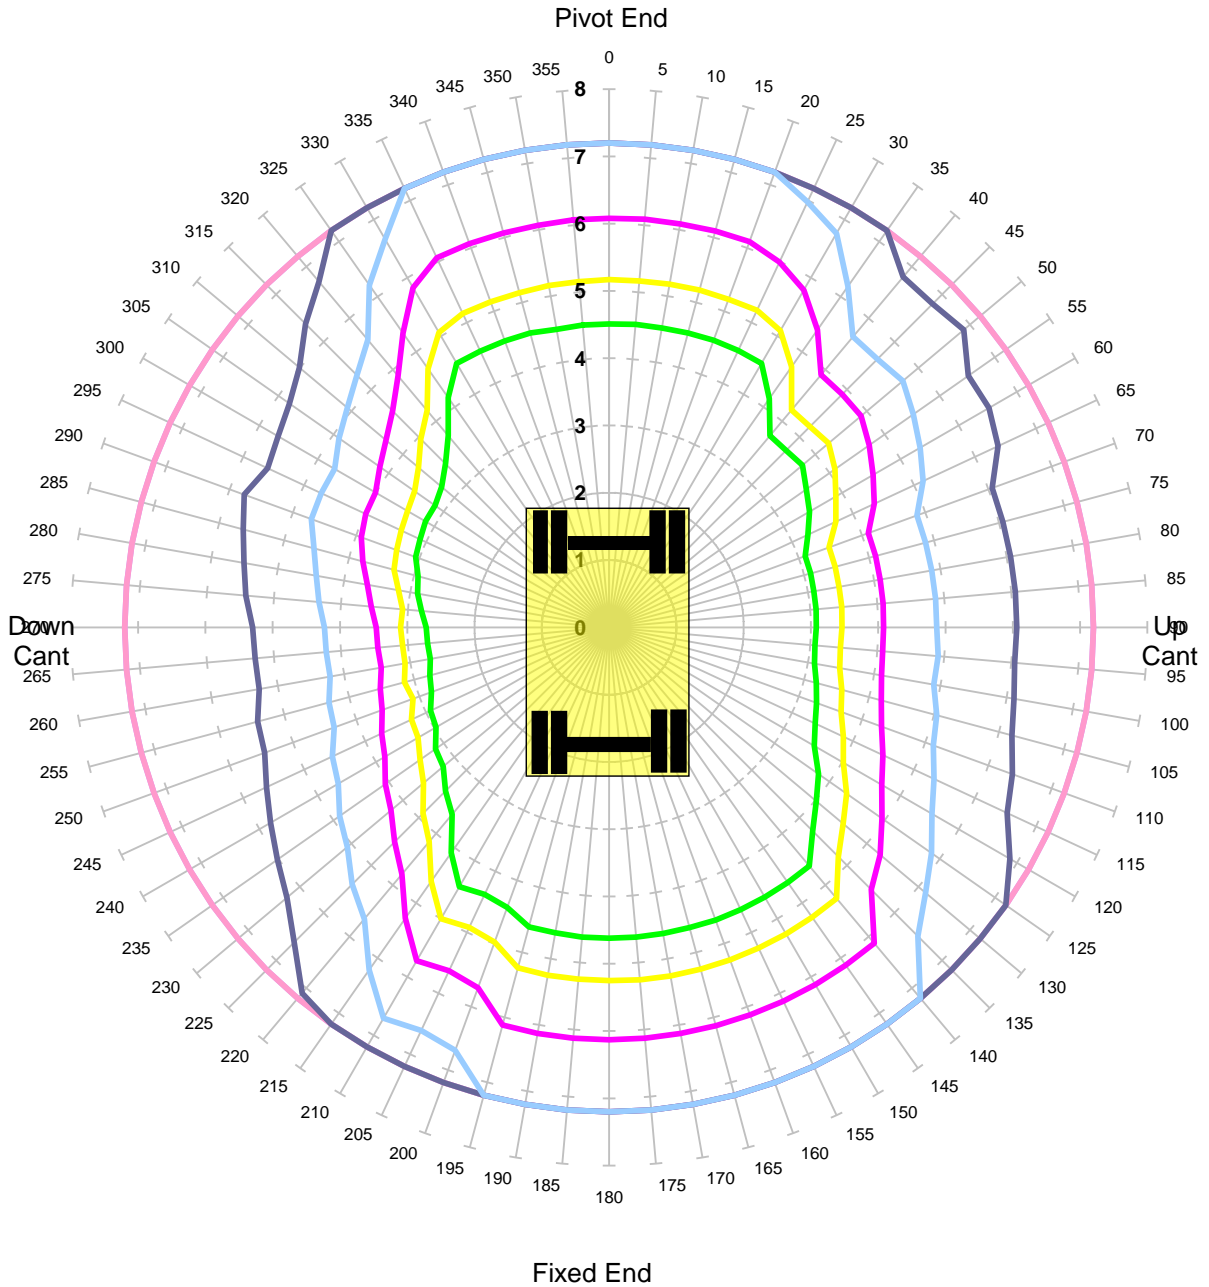


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 90.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Locked Rail Cant 150mm

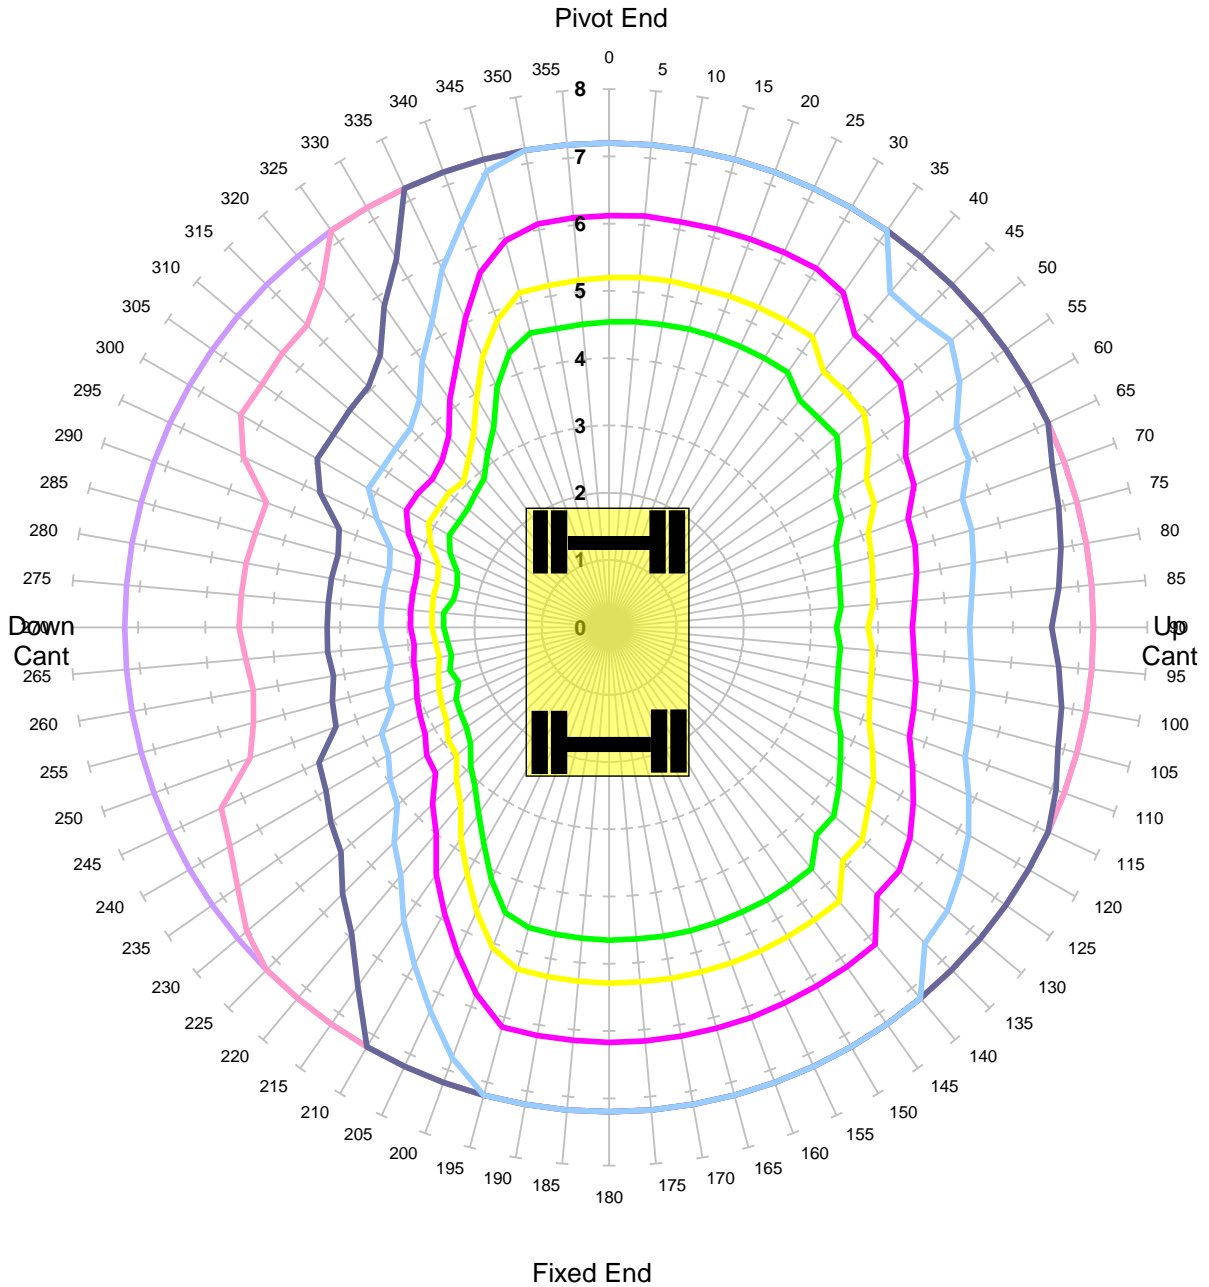


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 90.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift ALP1
Unlocked Road

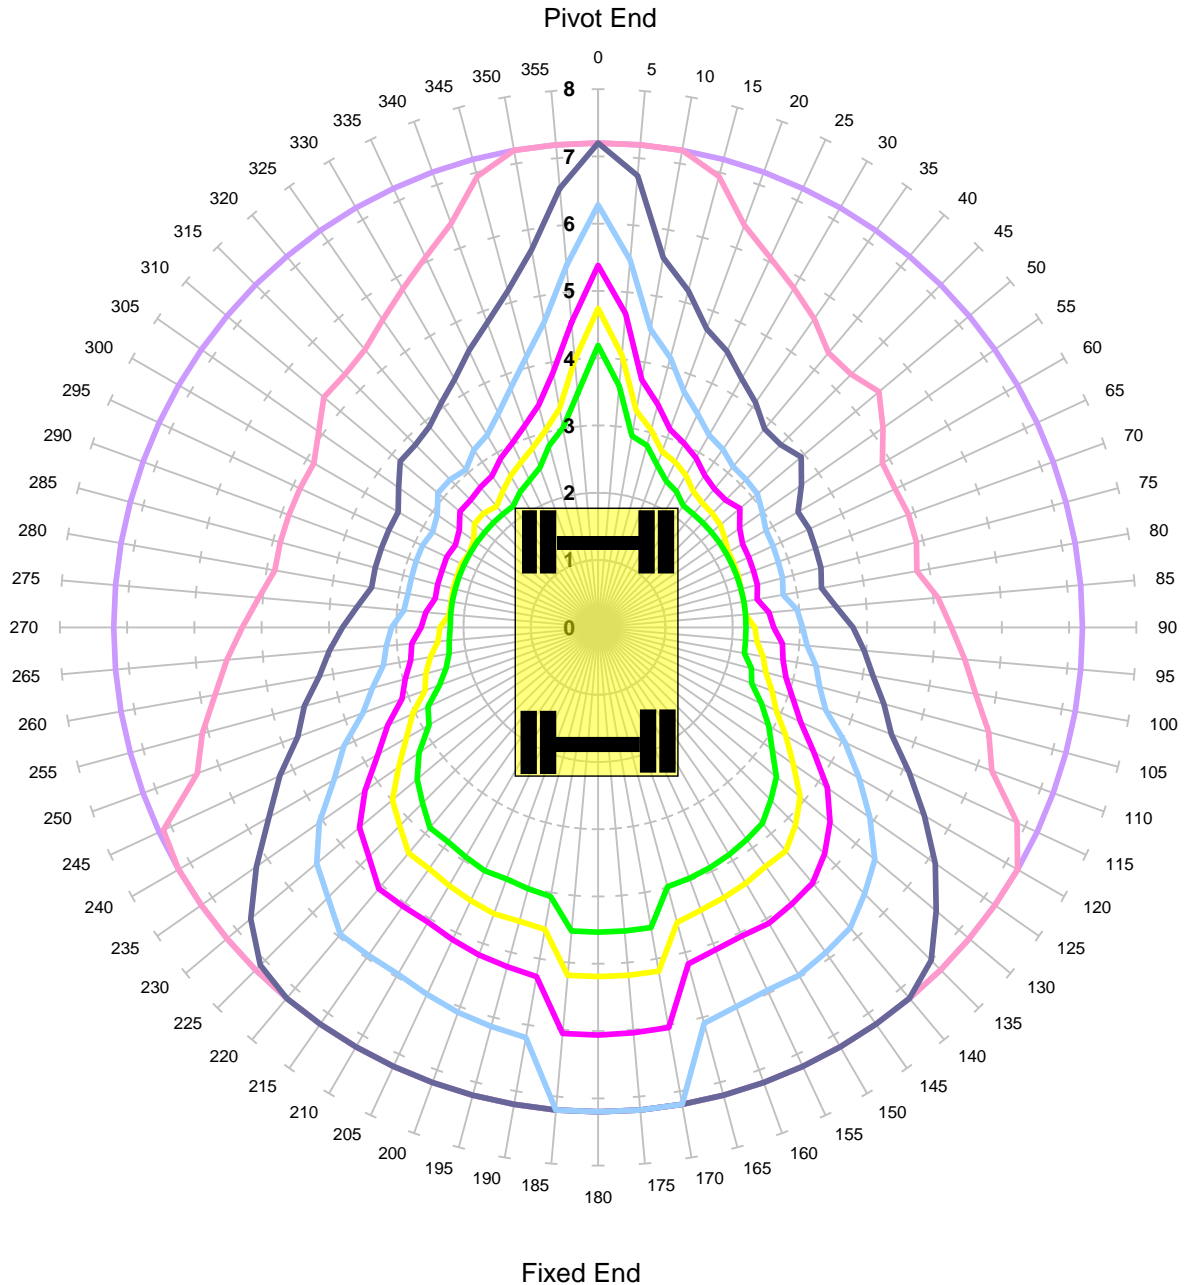


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 71.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift ALP1
Locked Road

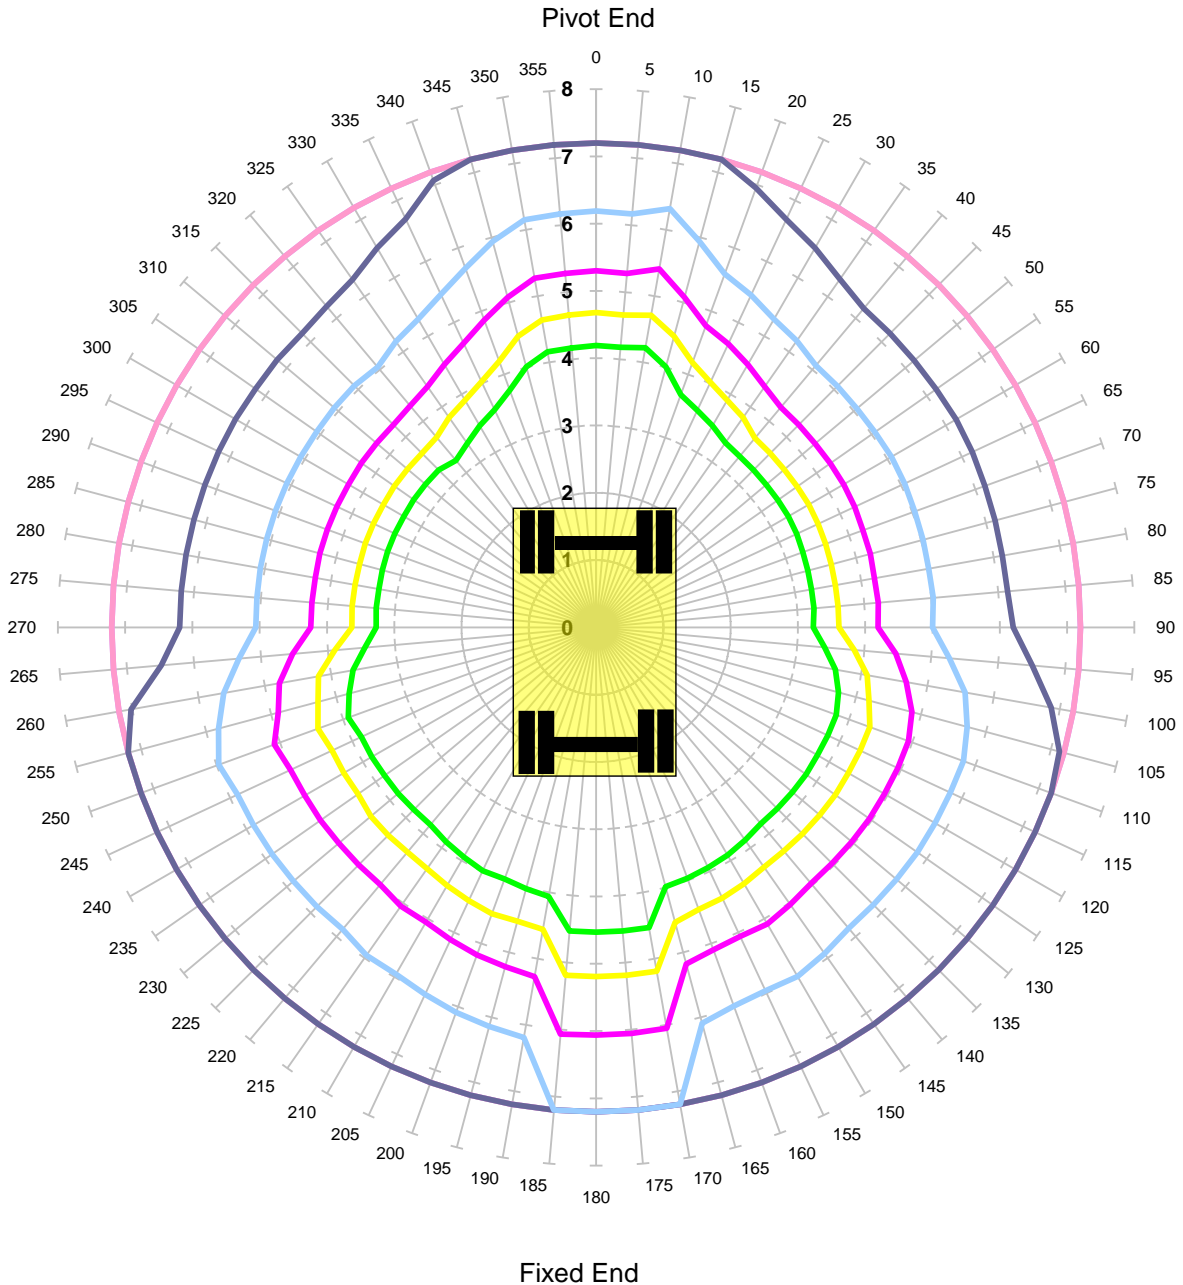


Units in Tonnes

- 1
 — 2
 — 3
 — 4
 — 5
 — 6
 — 7

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 71.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Unlocked Rail Cant -150mm - Tandem Lift

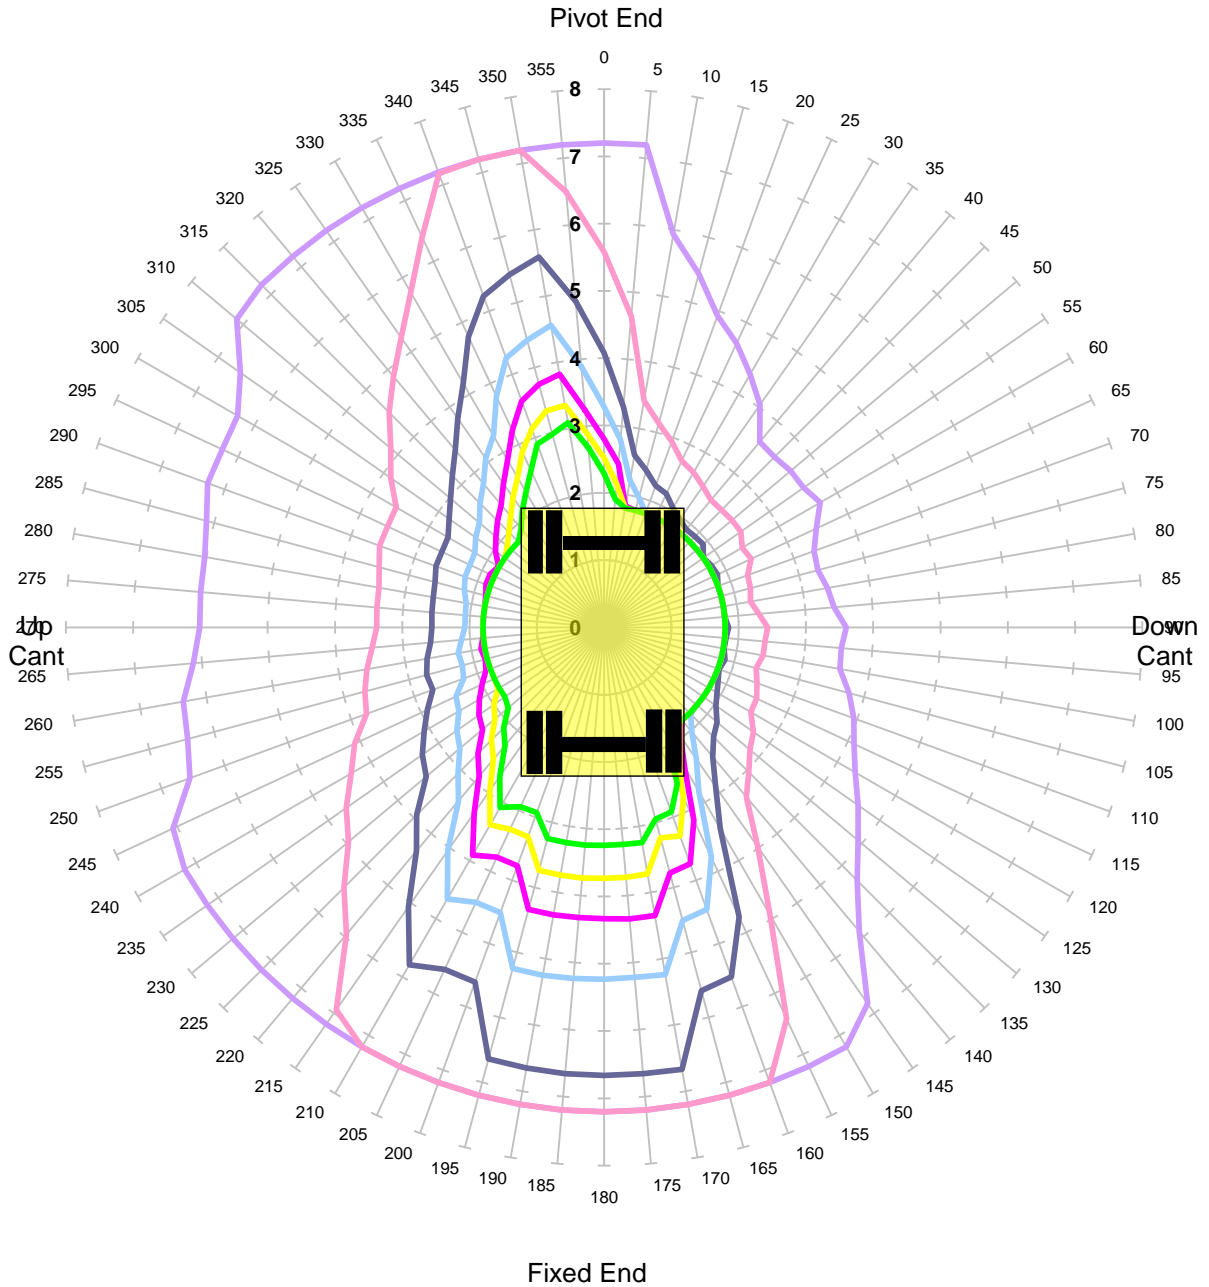


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 44.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Unlocked Rail Cant -50mm - Tandem Lift

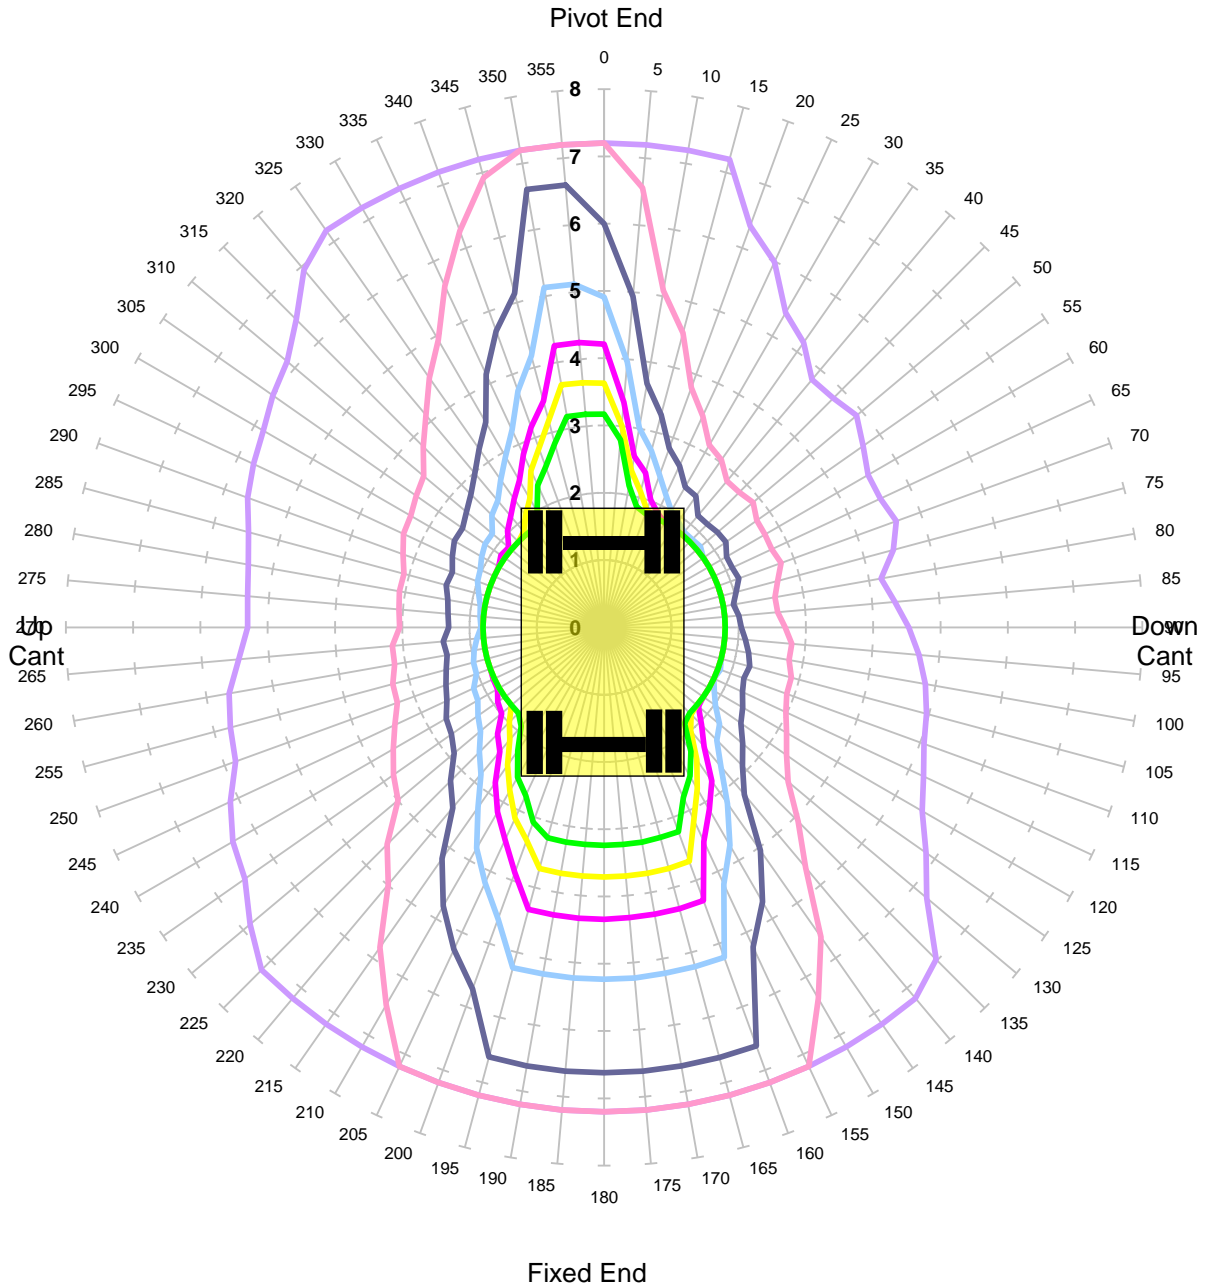


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 44.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Unlocked Rail Cant 50mm - Tandem Lift

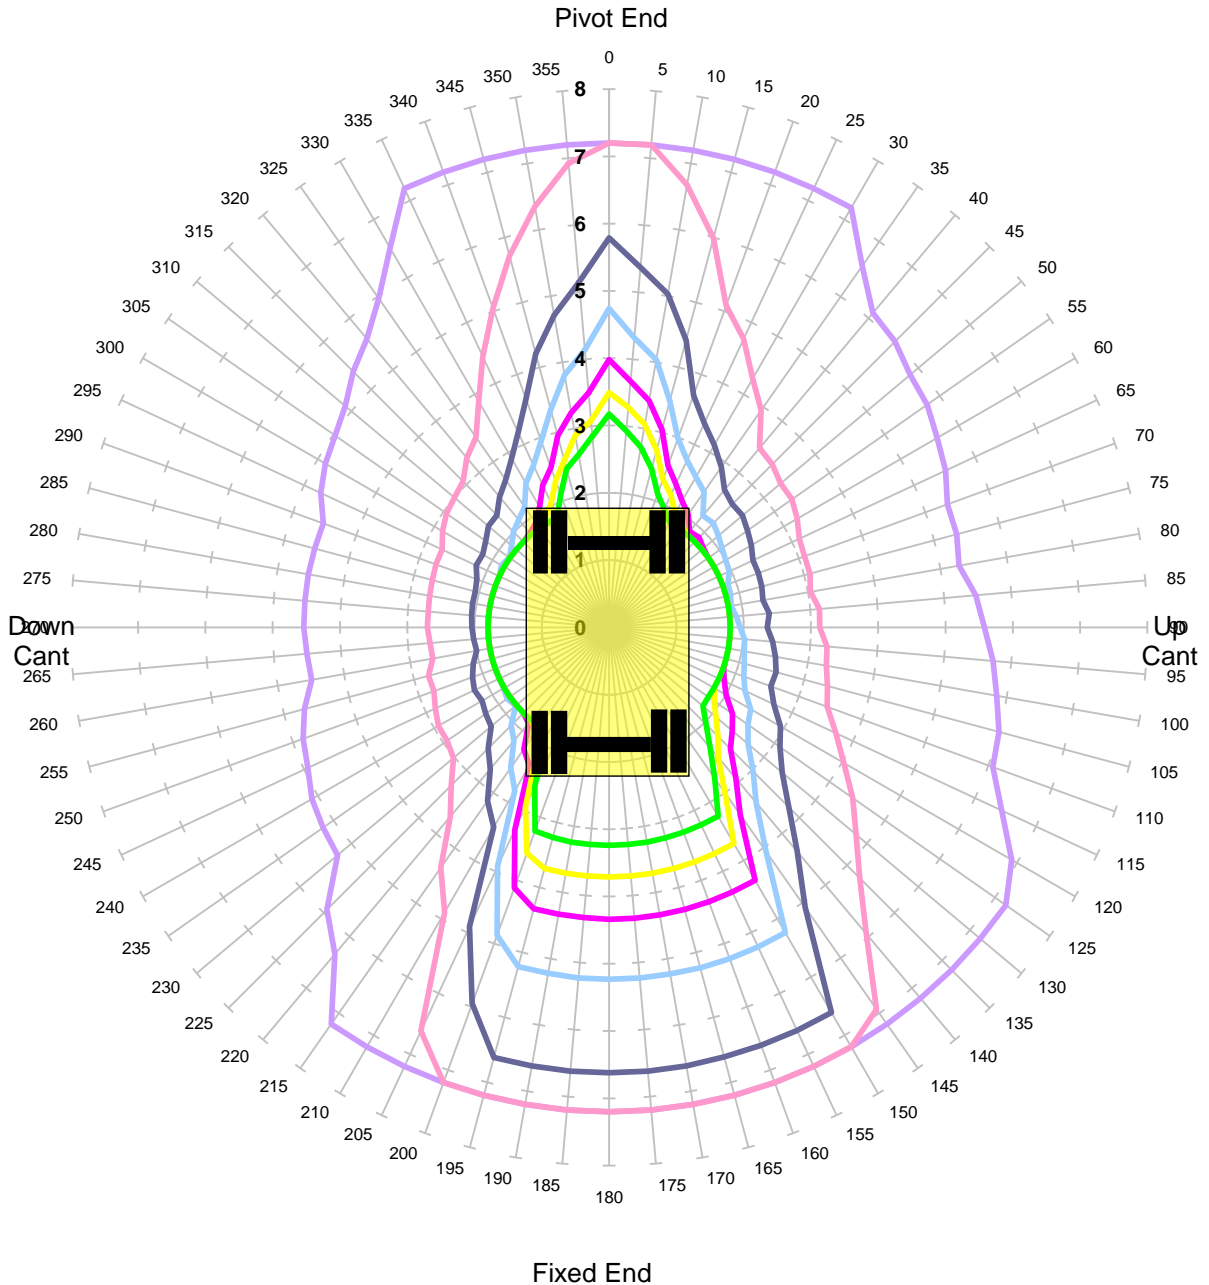


Units in Tonnes

- 1
 — 2
 — 3
 — 4
 — 5
 — 6
 — 7


| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 44.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Unlocked Rail Cant 150mm - Tandem Lift

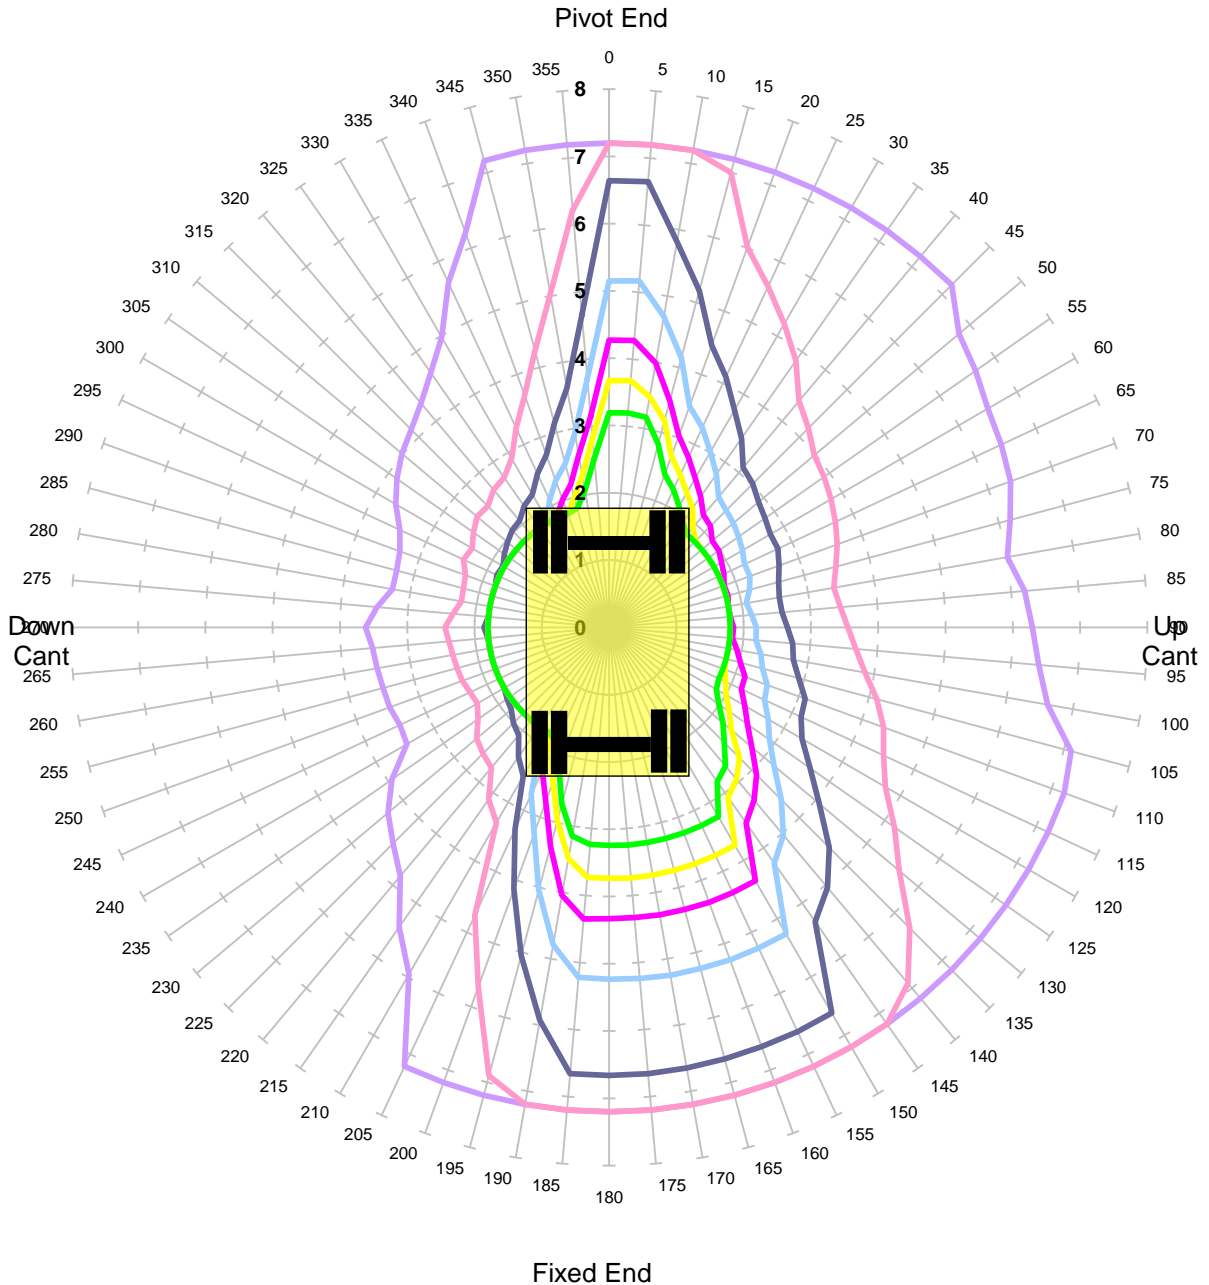


| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 44.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Locked Rail Cant -150mm - Tandem Lift

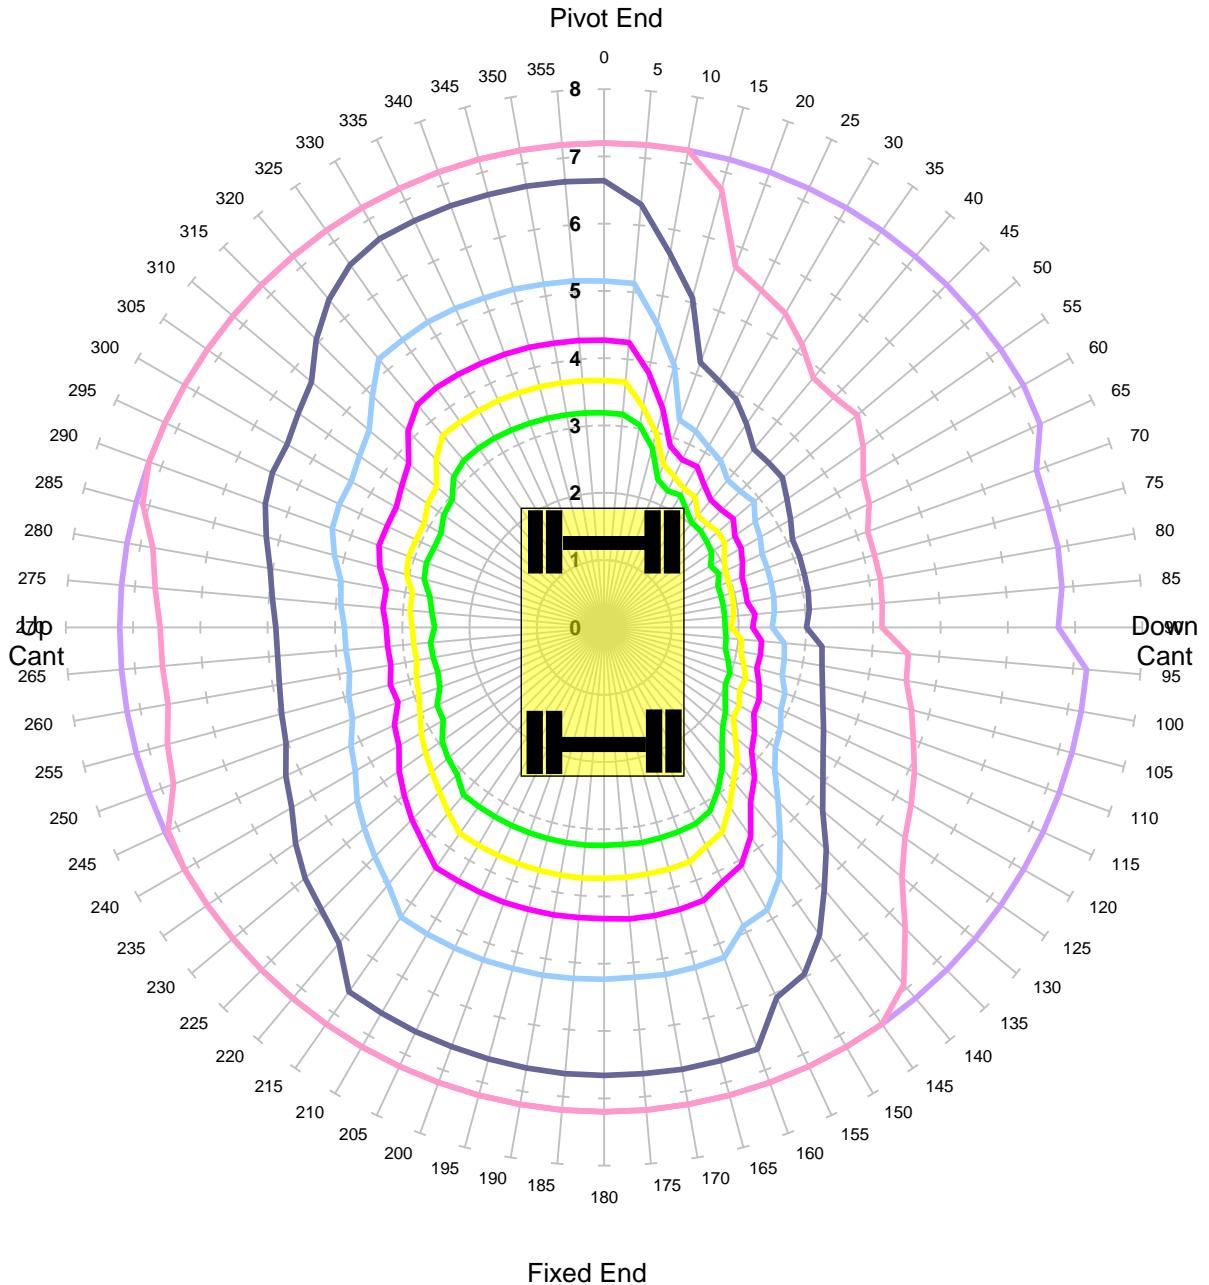

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 59.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Locked Rail Cant -50mm - Tandem Lift

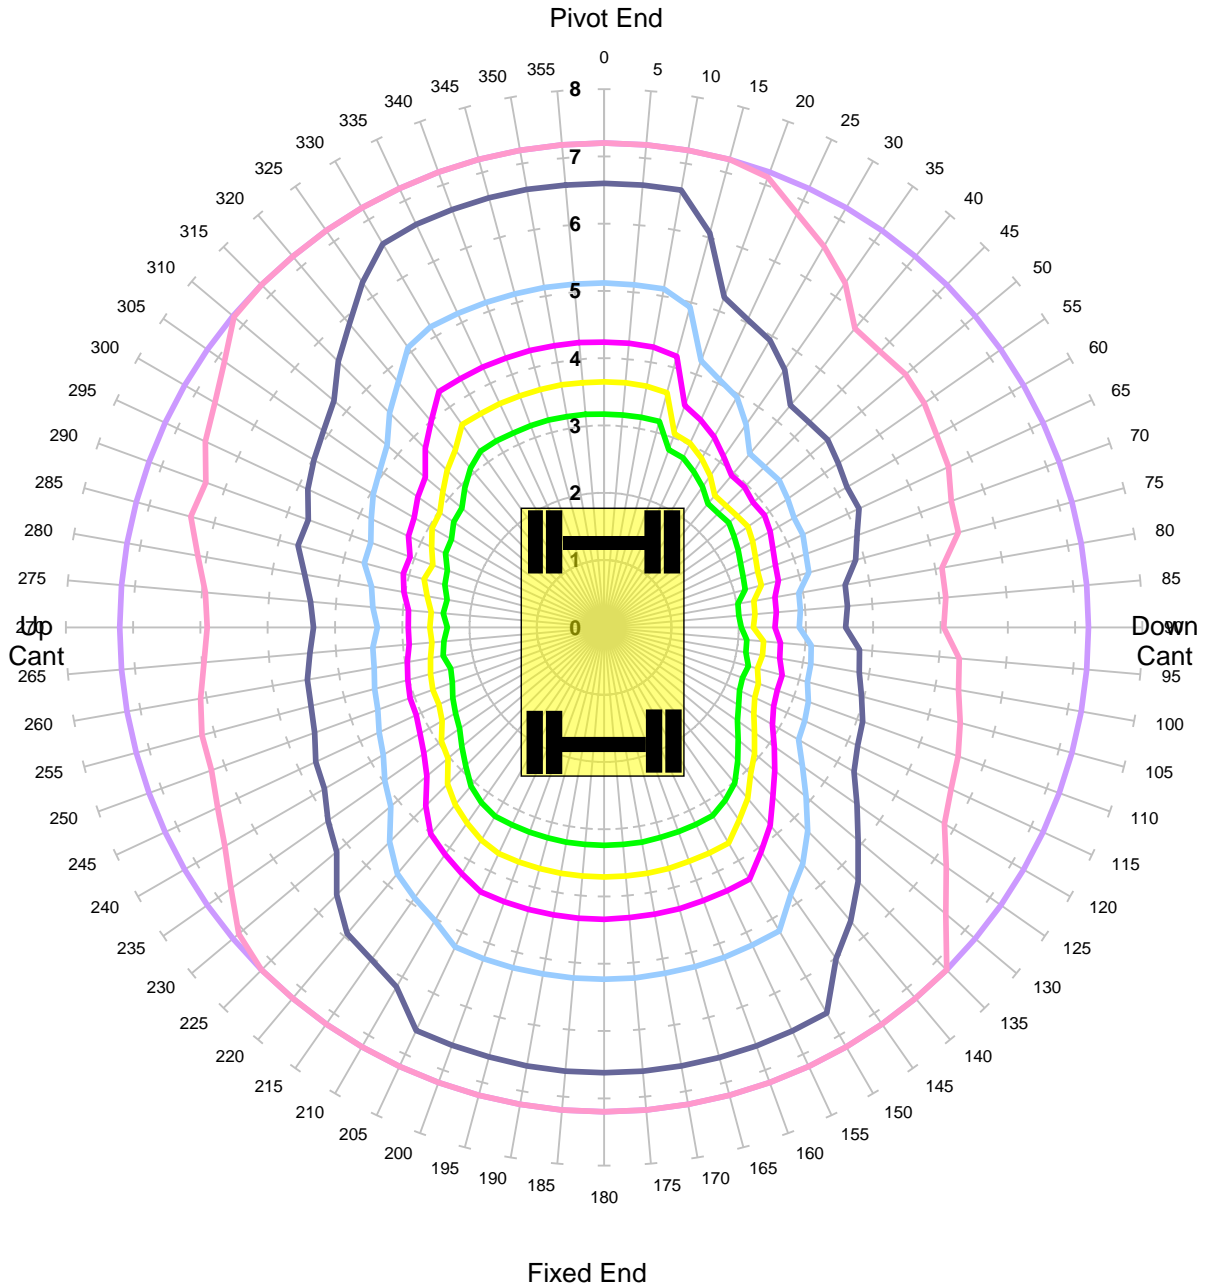


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 59.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Locked Rail Cant 50mm - Tandem Lift

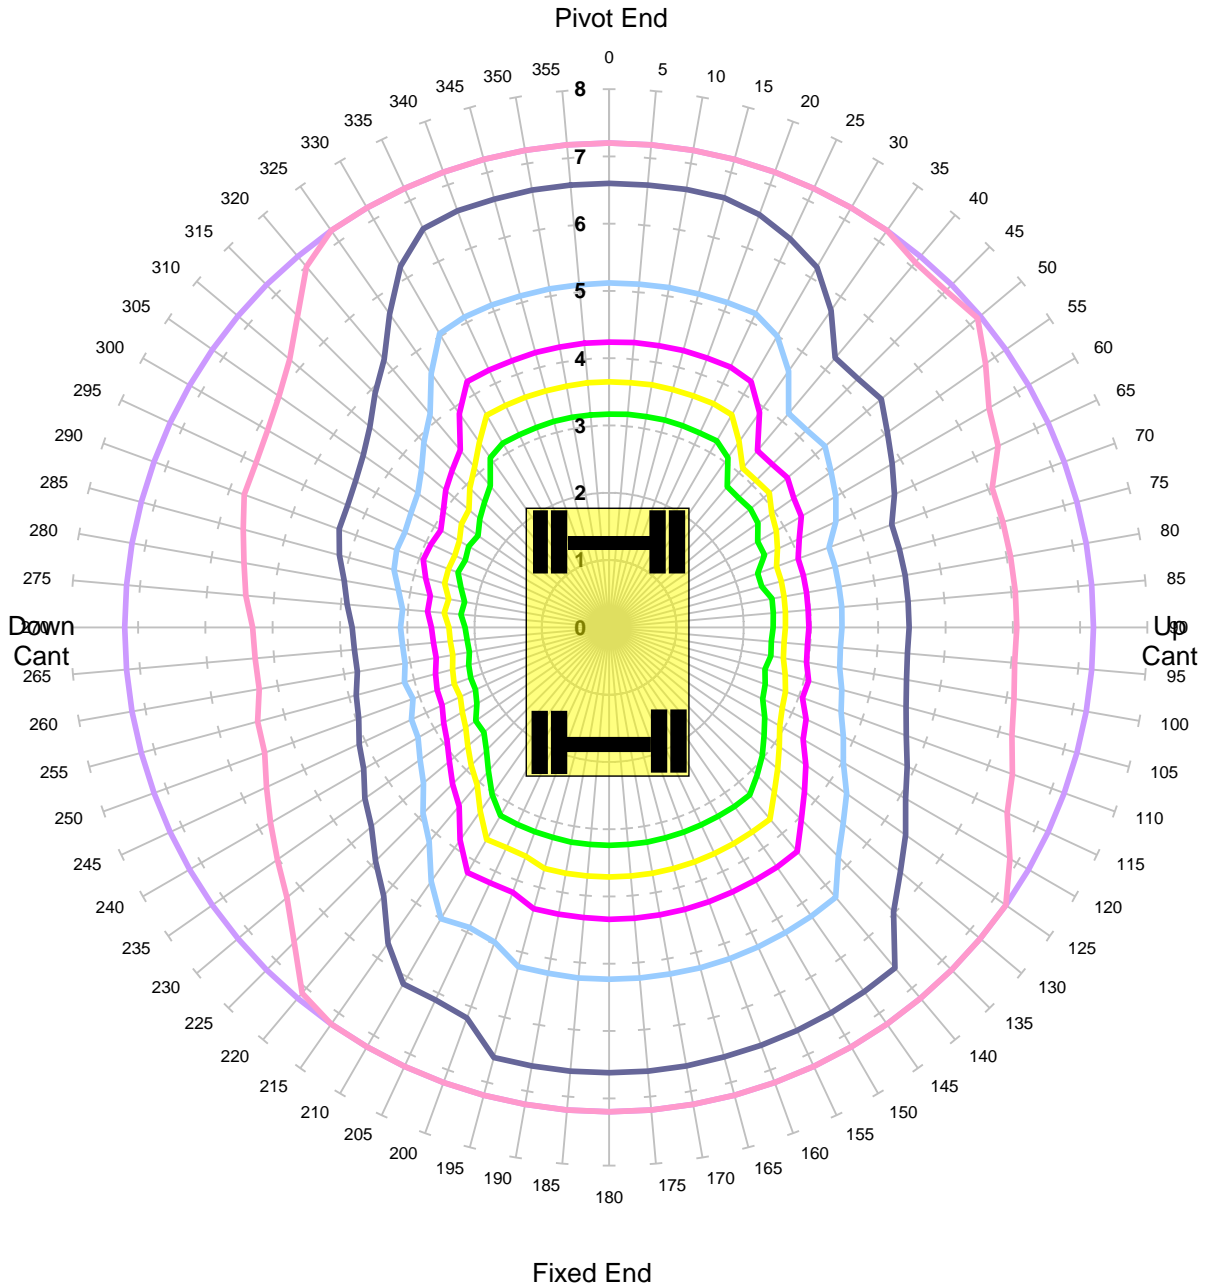


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 59.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Locked Rail Cant 150mm - Tandem Lift

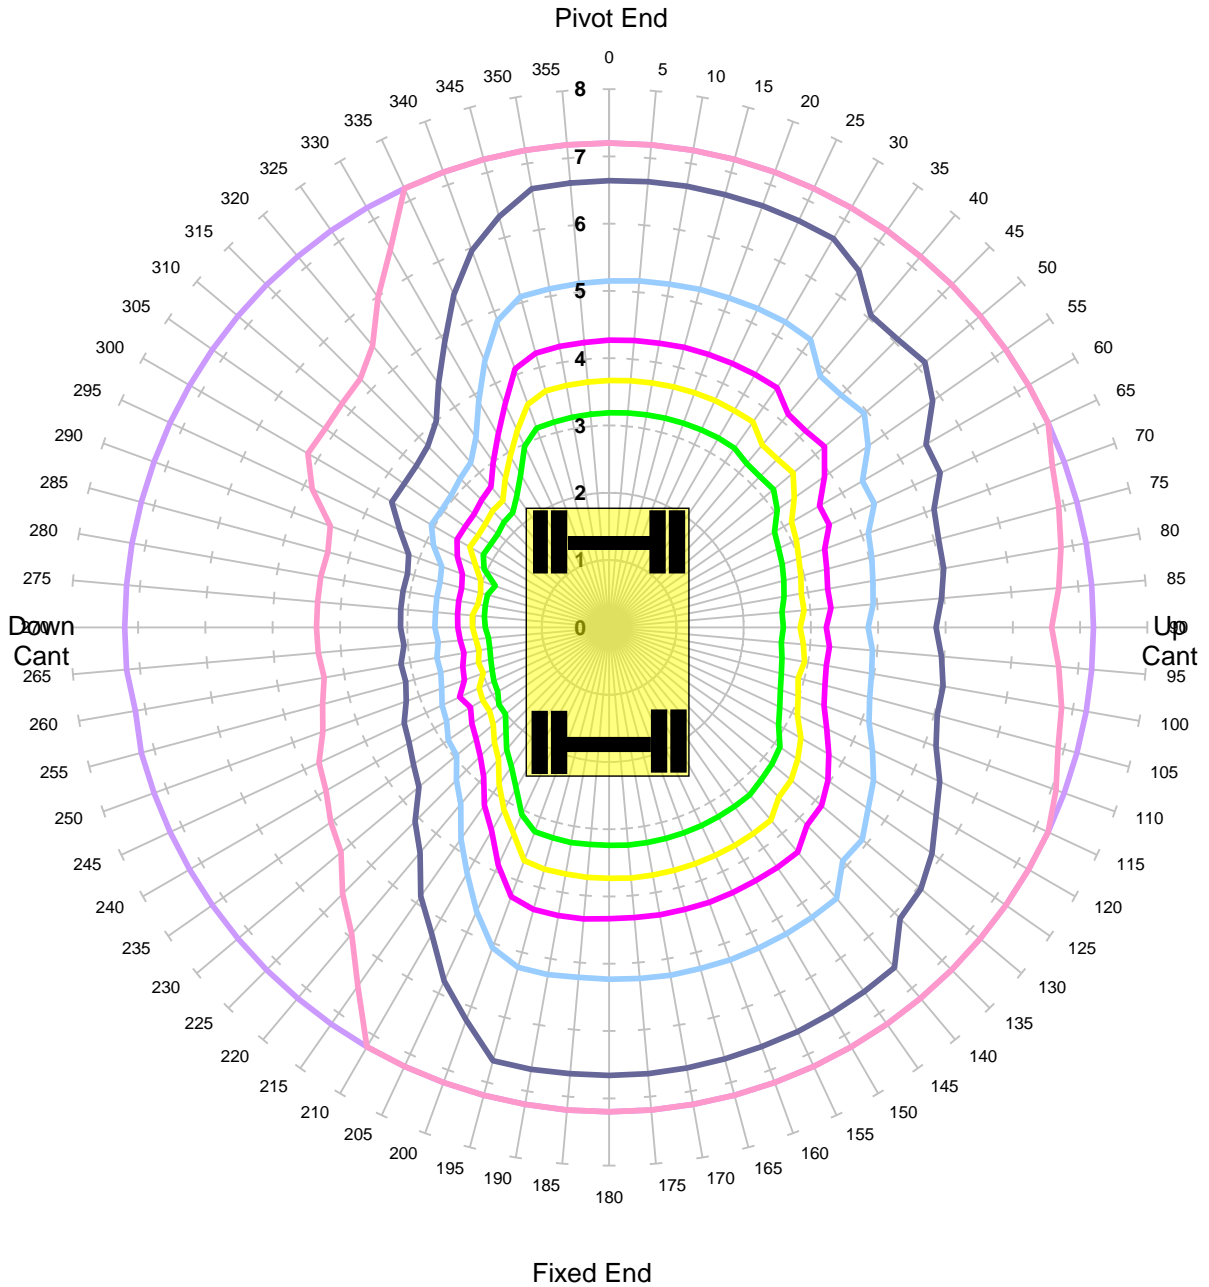


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 59.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift ALP1
Unlocked Road - Tandem Lift

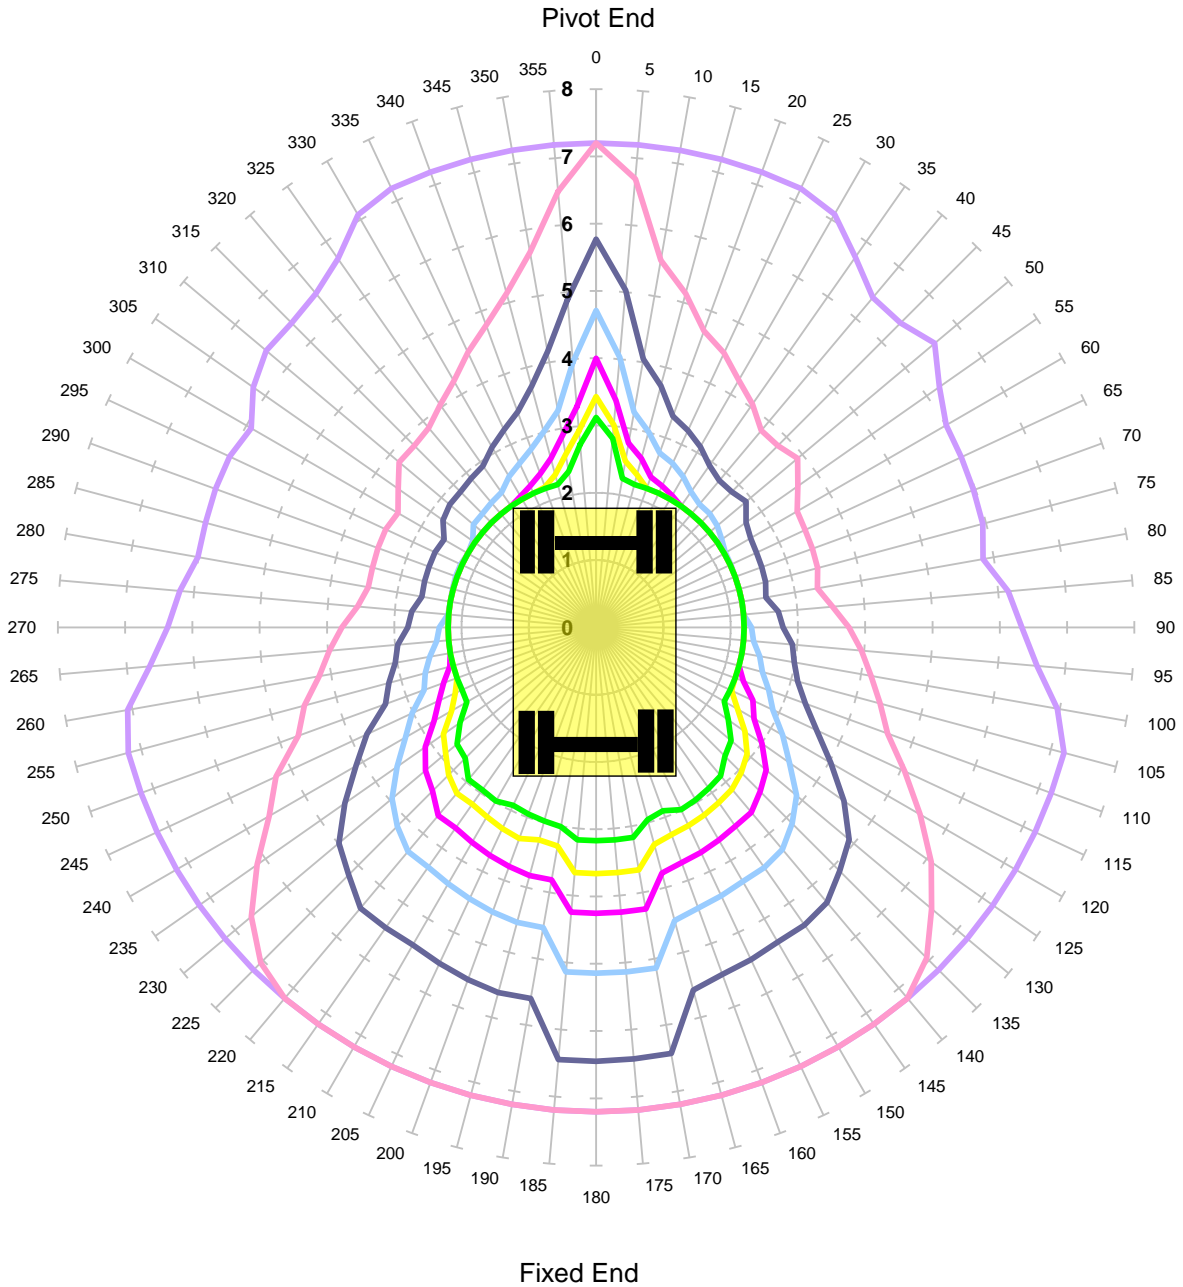


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 47.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift ALP1
Locked Road - Tandem Lift

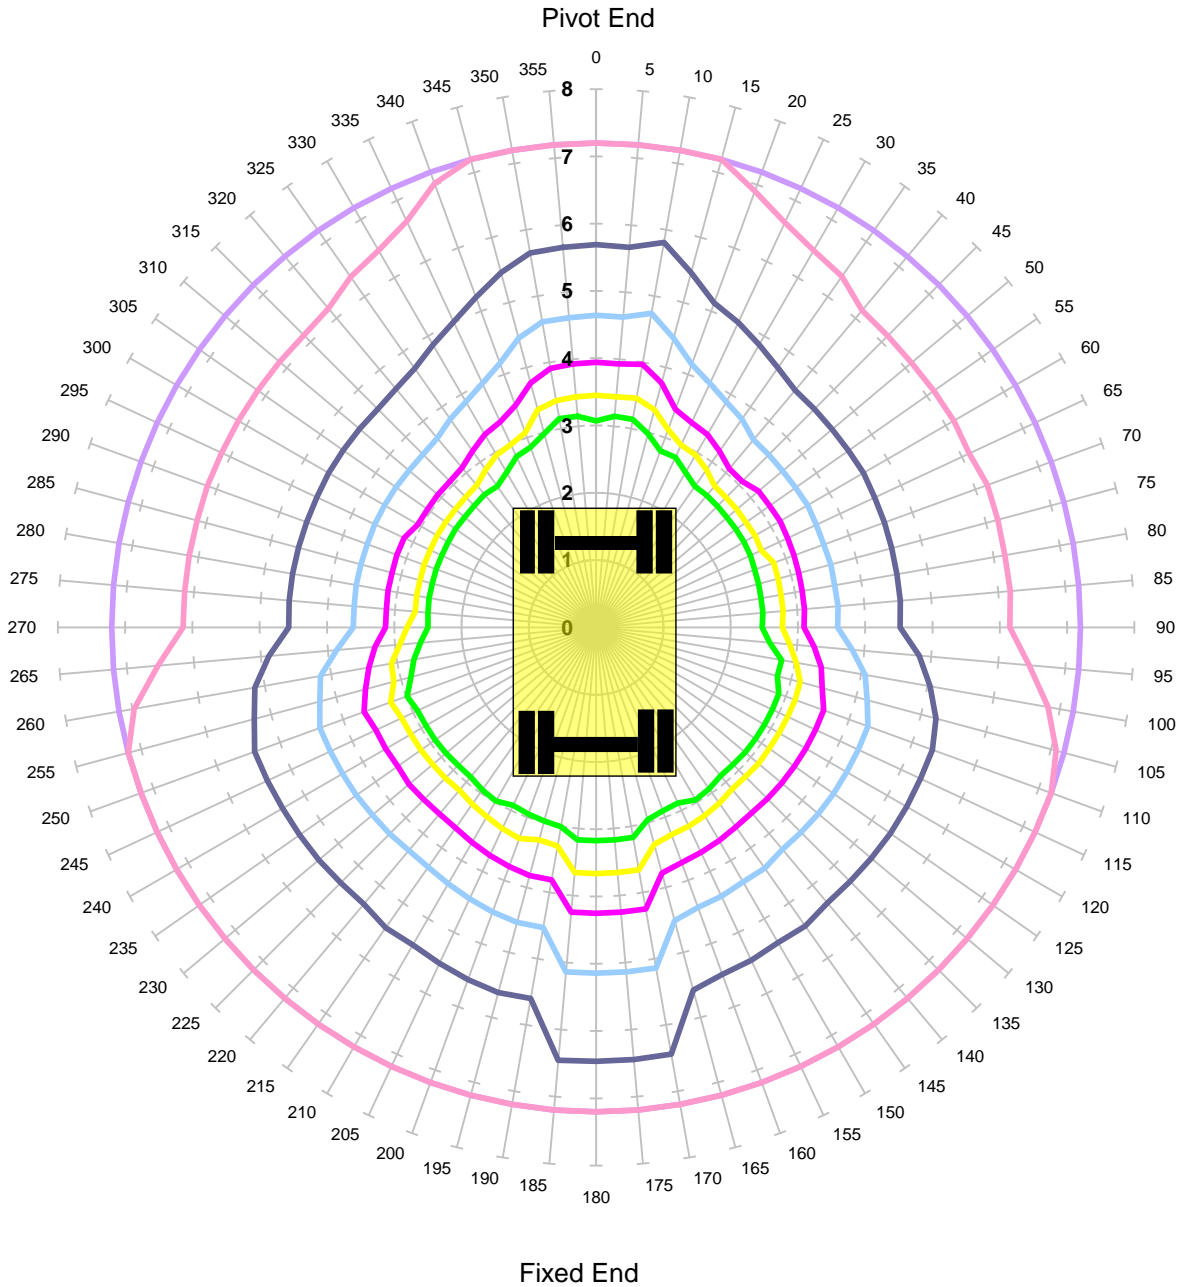


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7


| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 47.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant -150mm

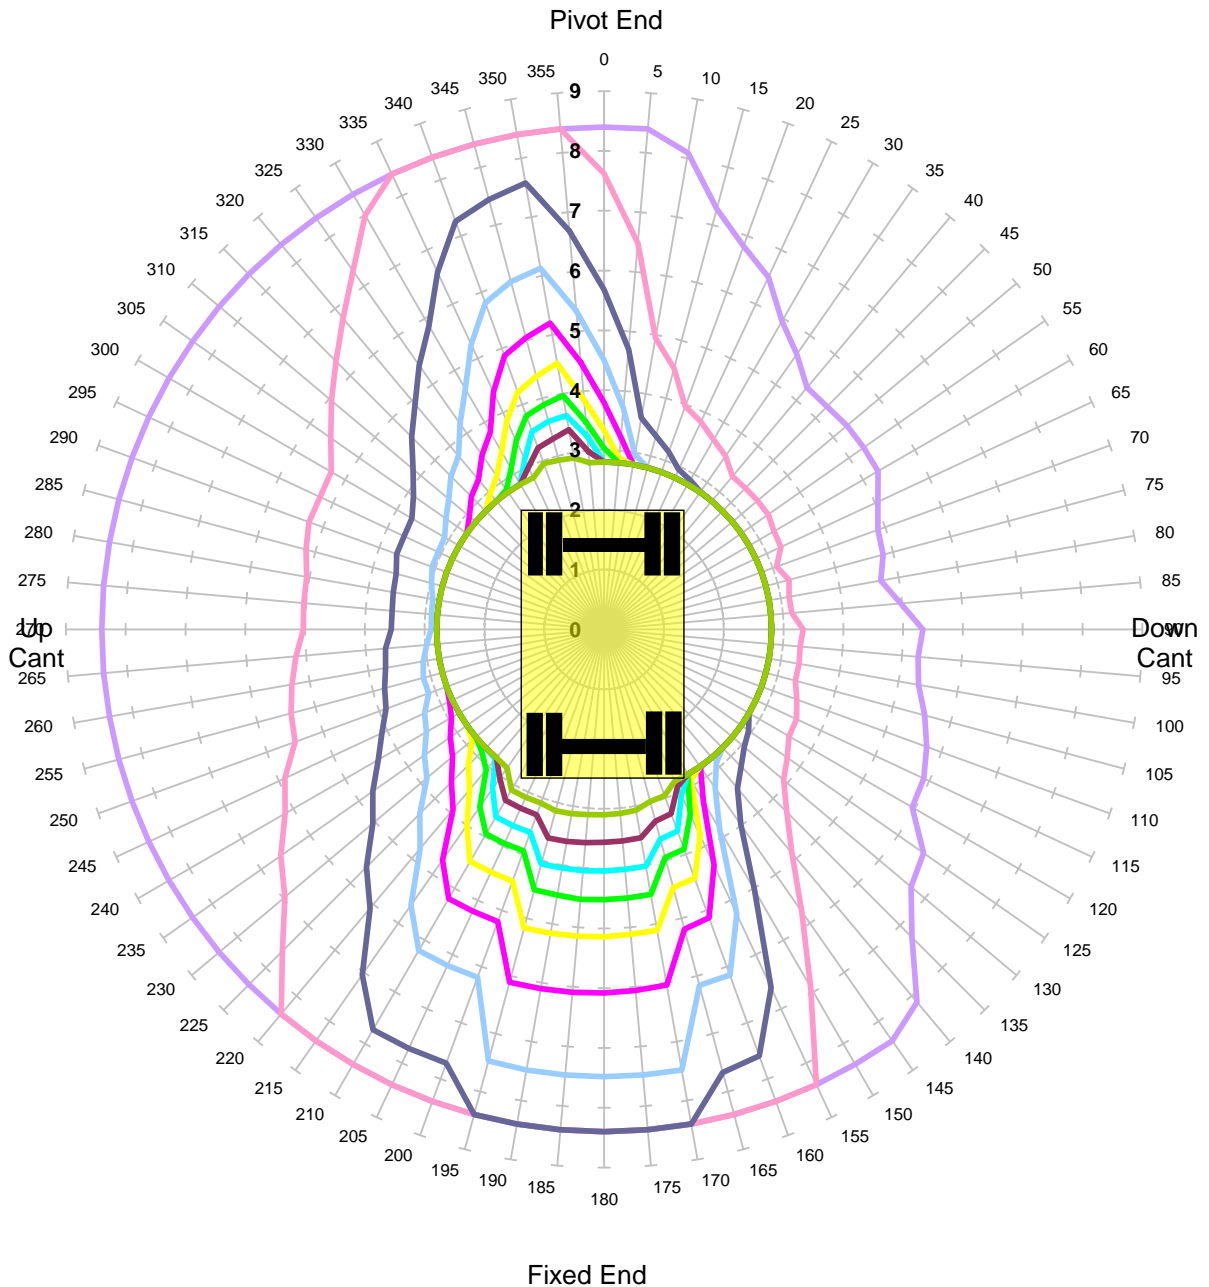

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 67.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant -50mm

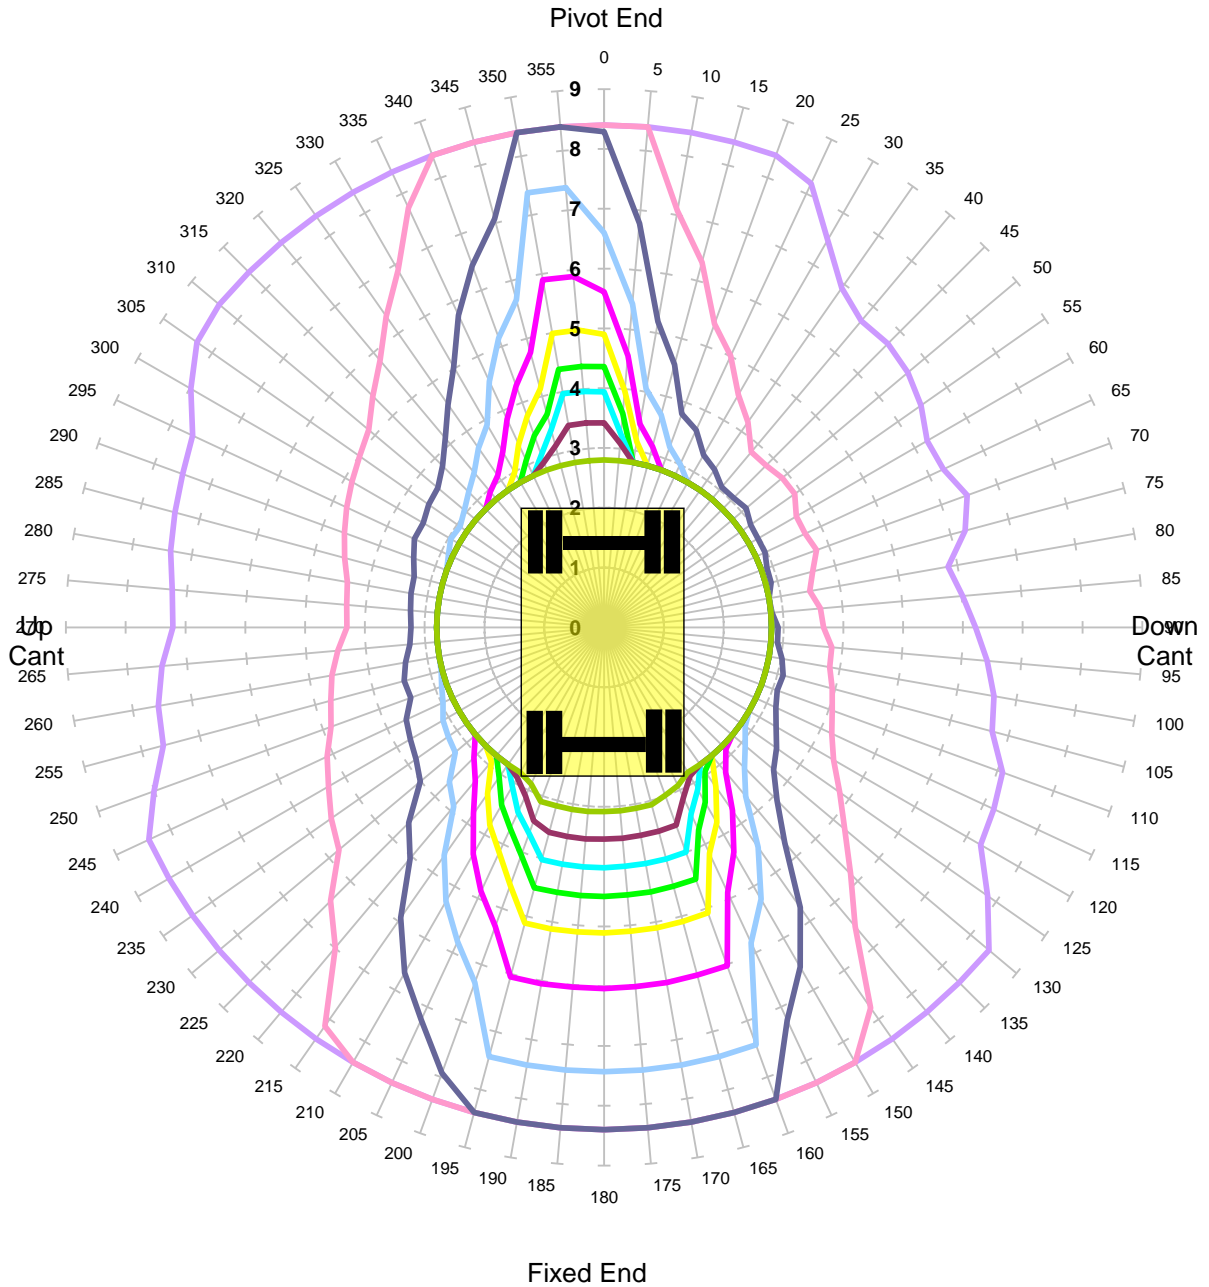


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 67.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant 50mm

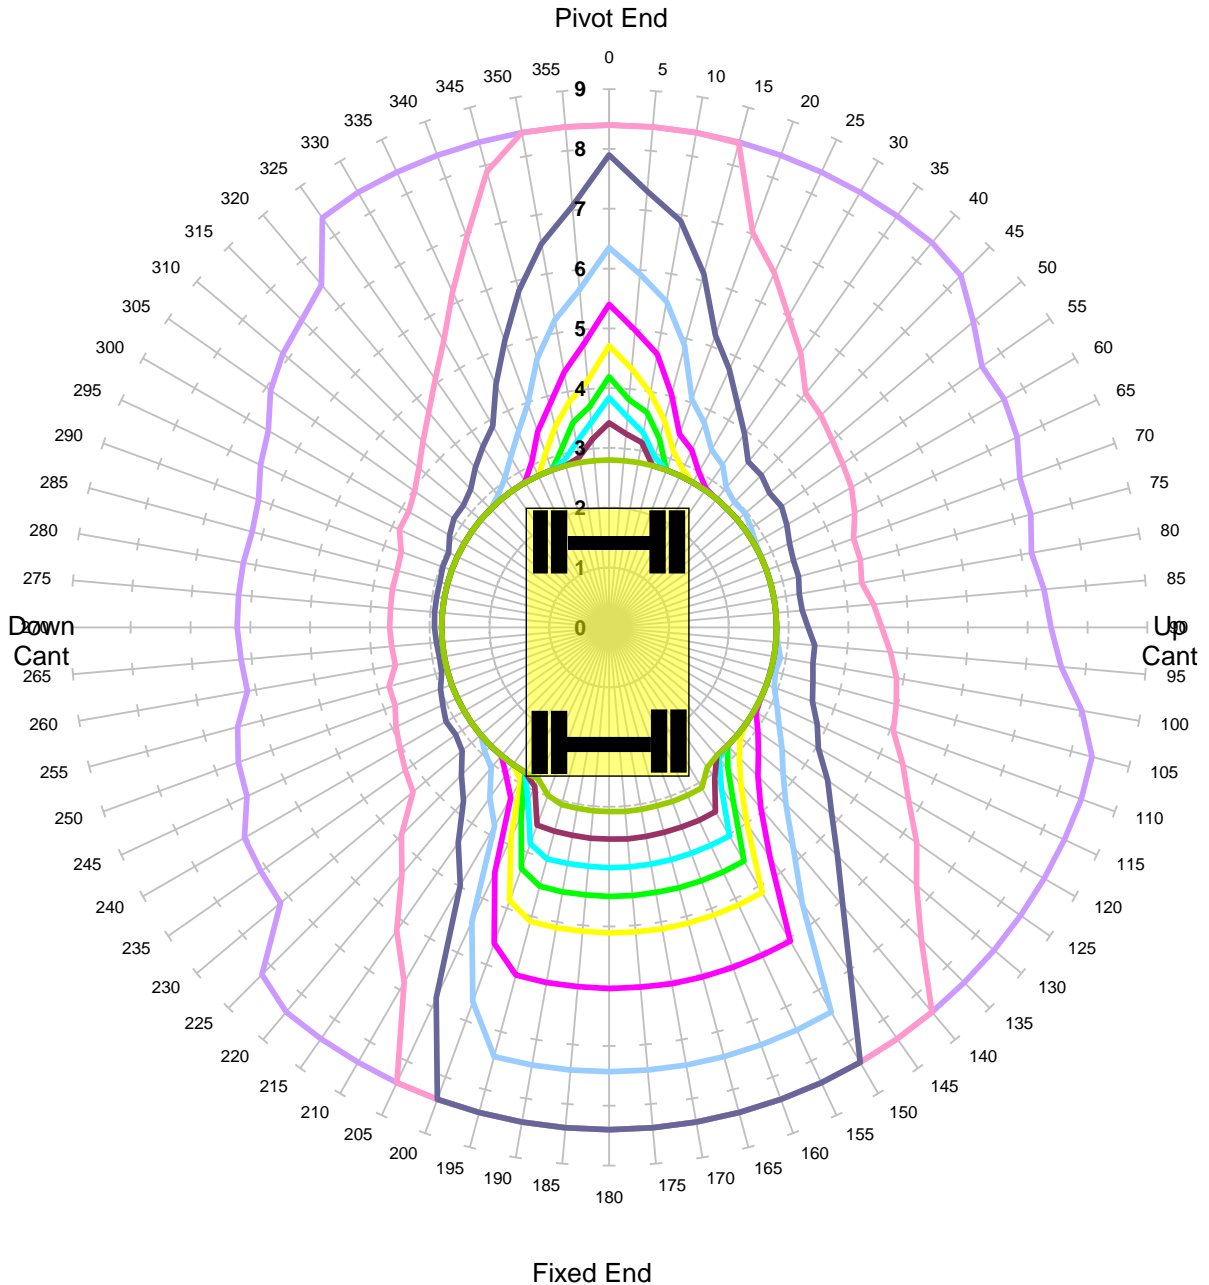


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10


| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 67.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant 150mm

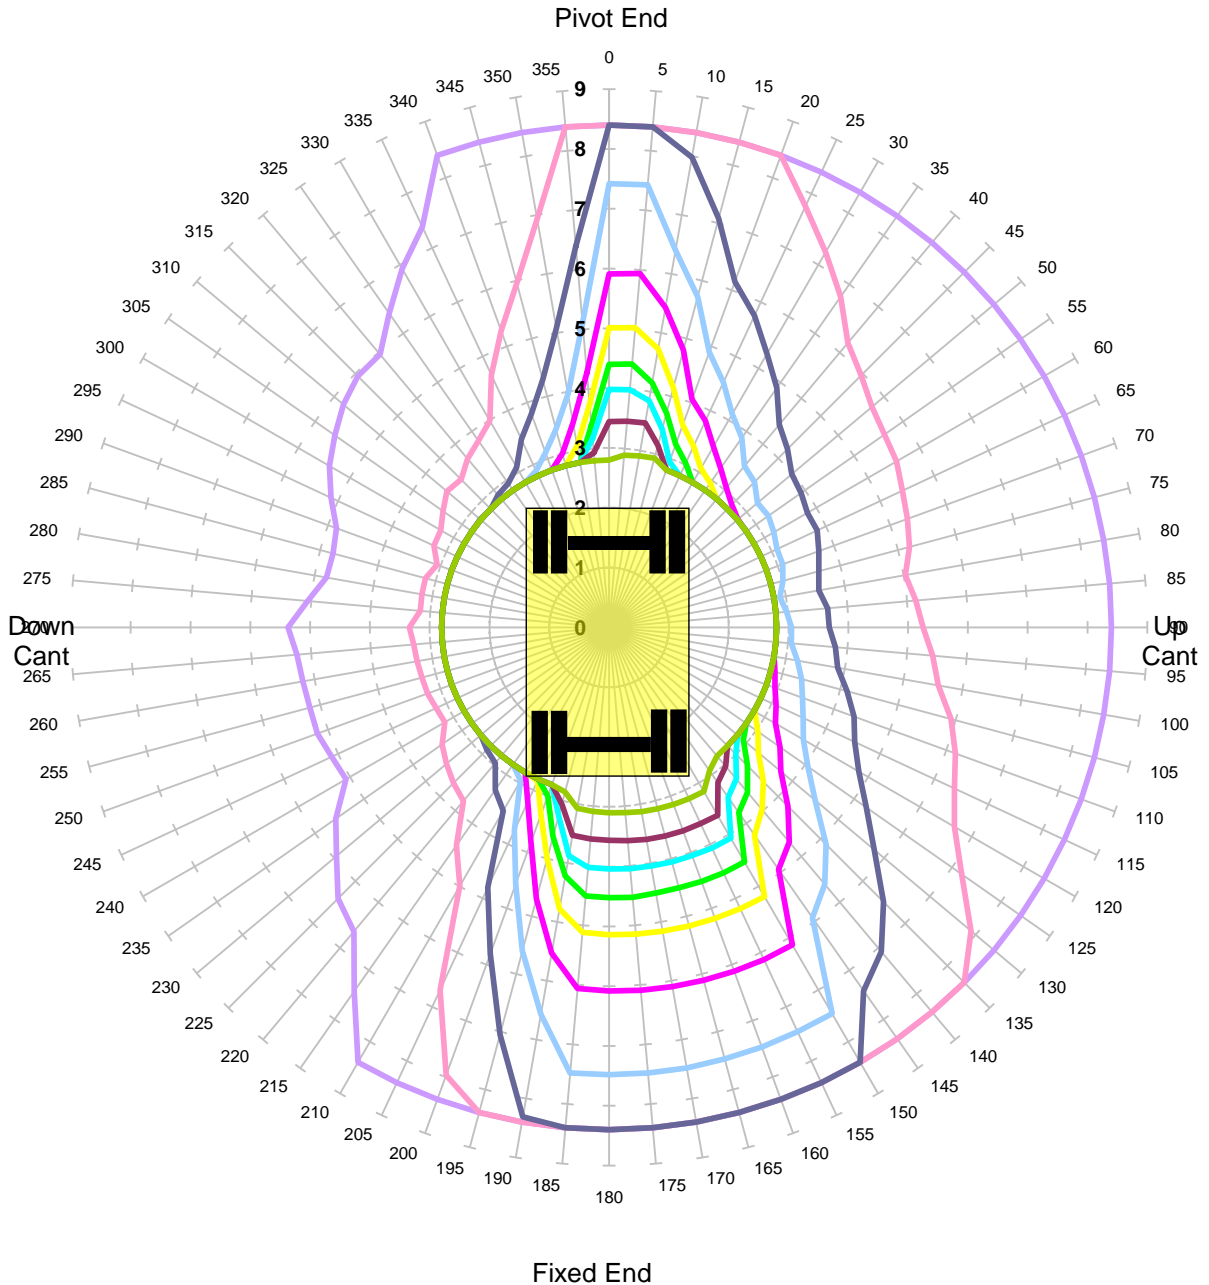

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 67.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant -150mm

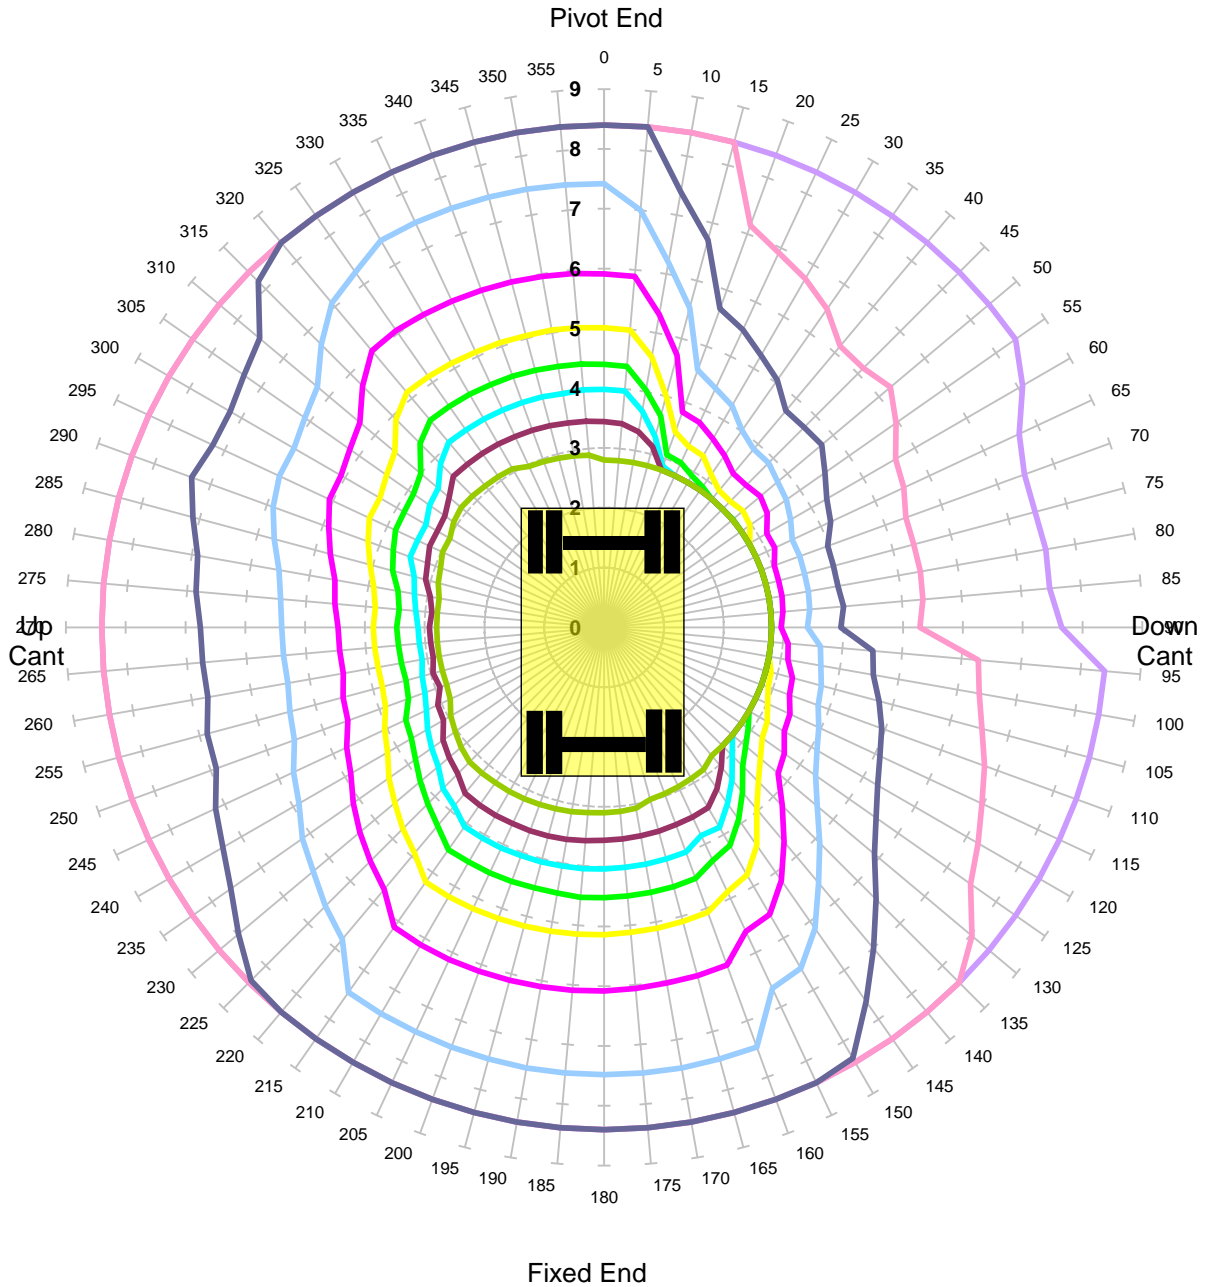


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 90.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant -50mm

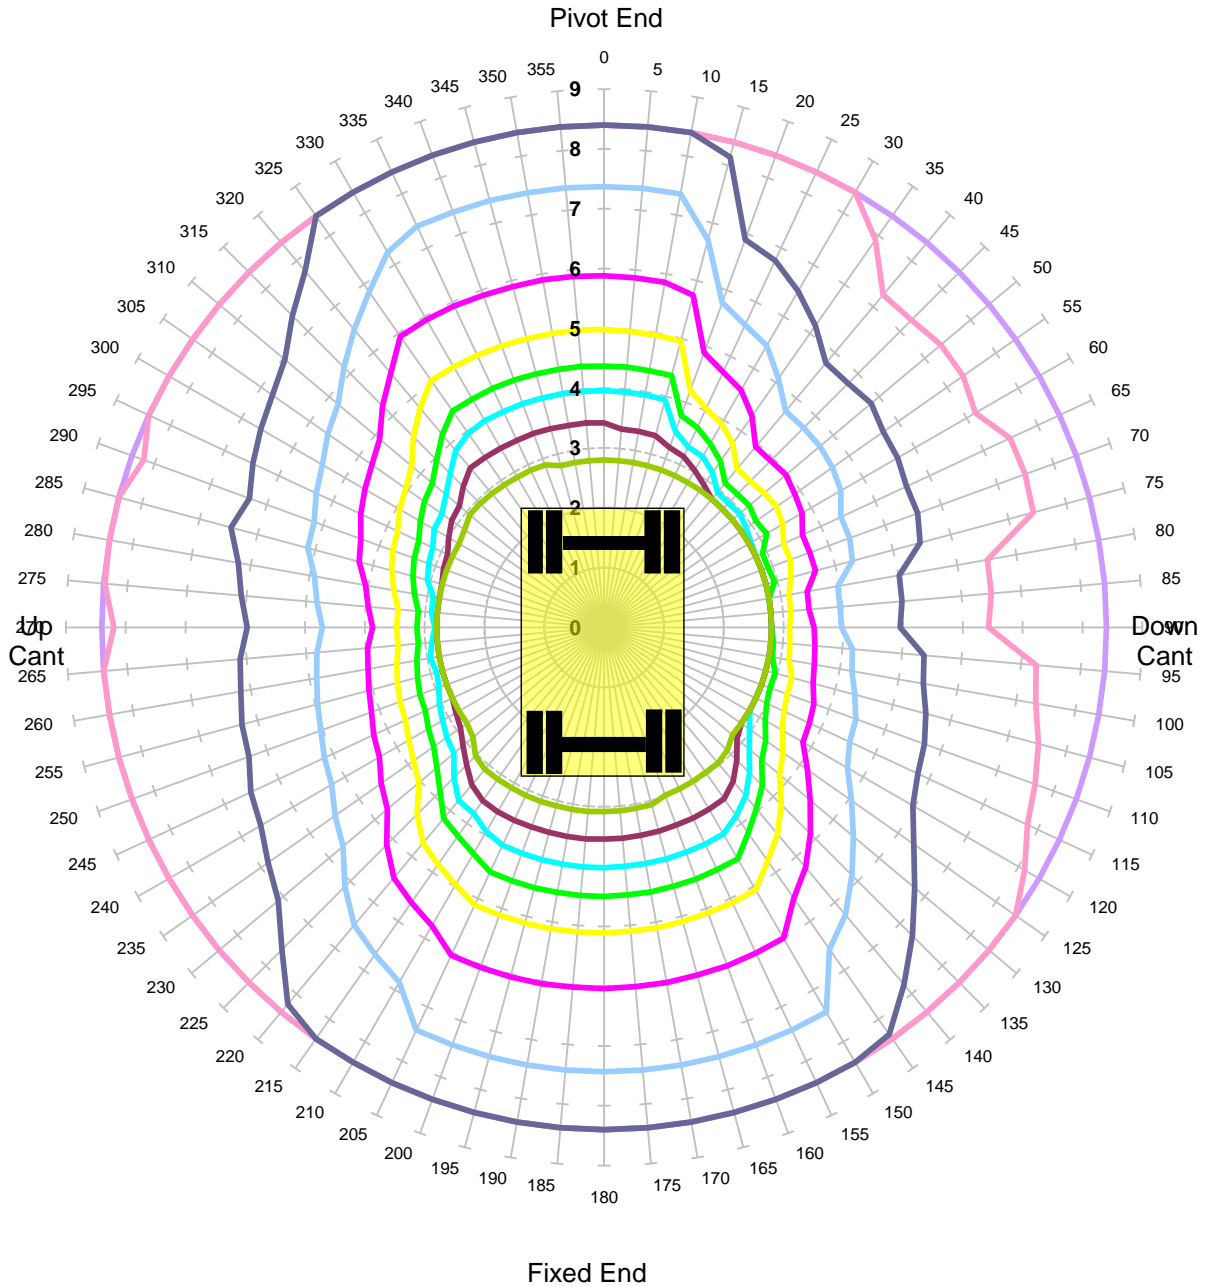


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10


| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 90.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant 50mm

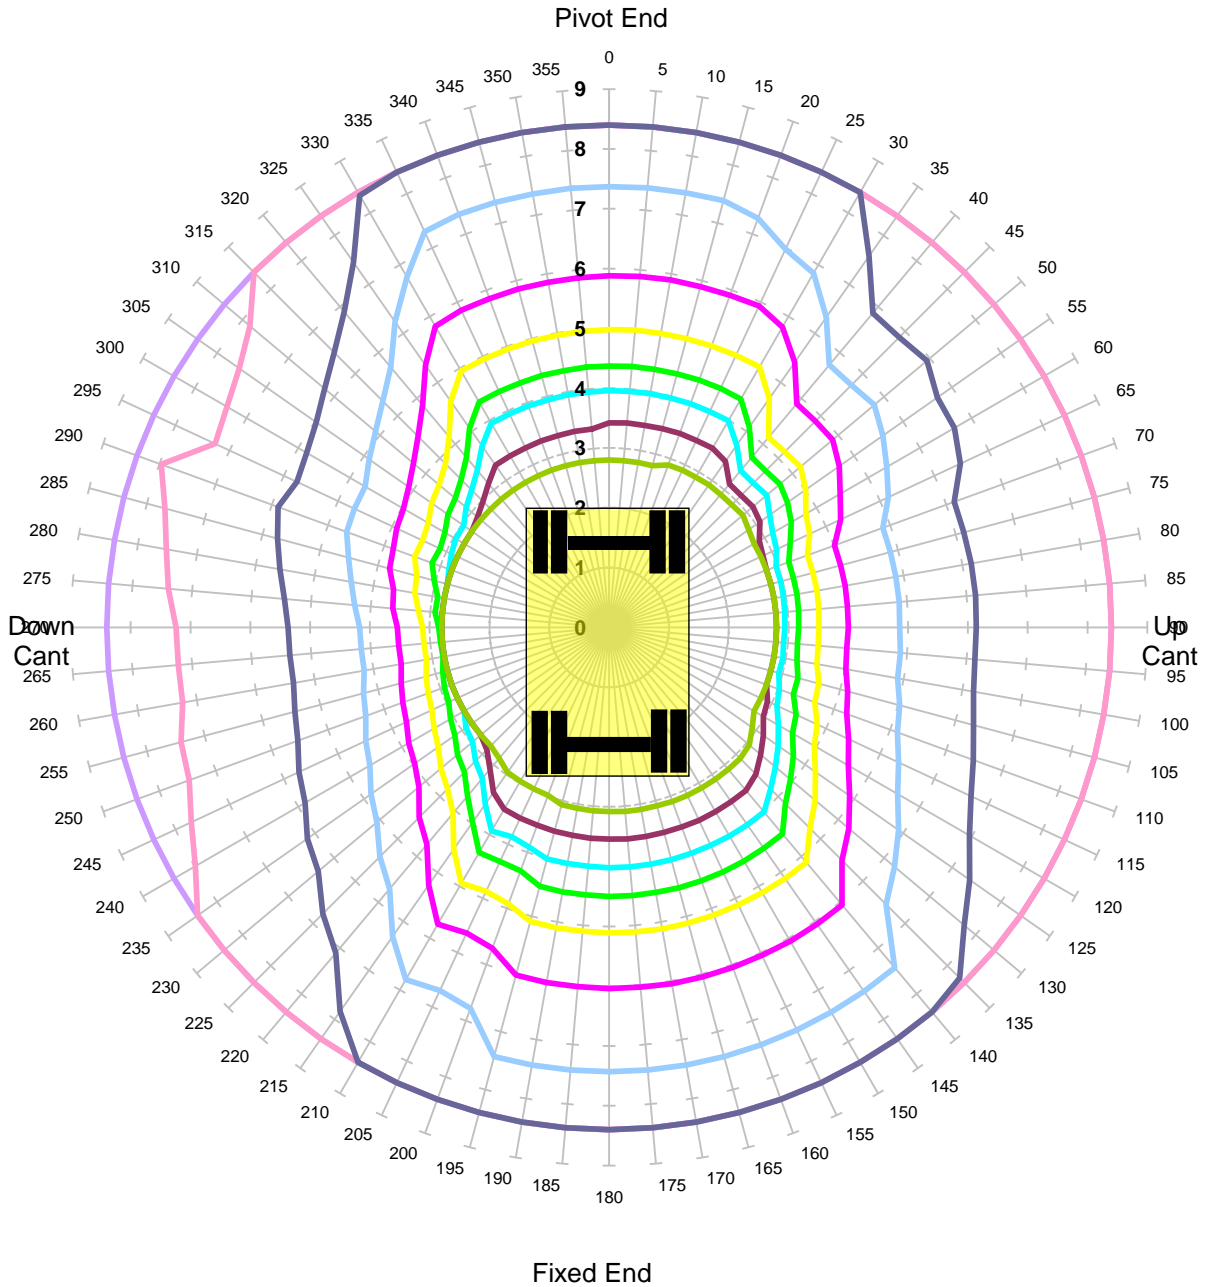

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 90.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant 150mm

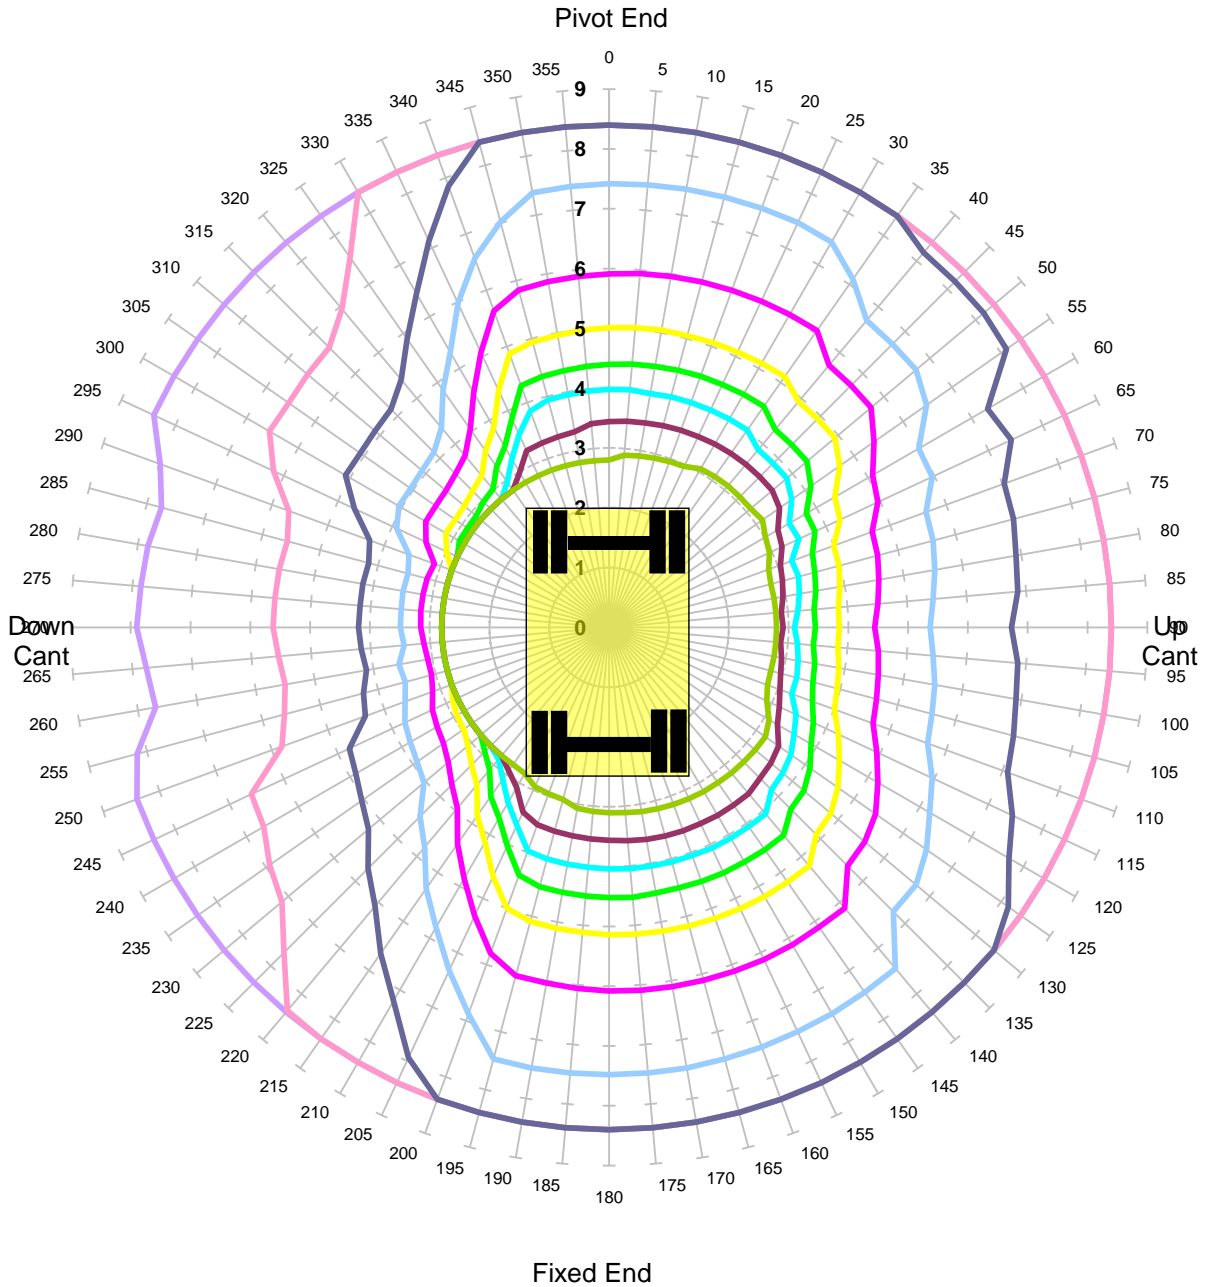


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 90.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift QH
Unlocked Road

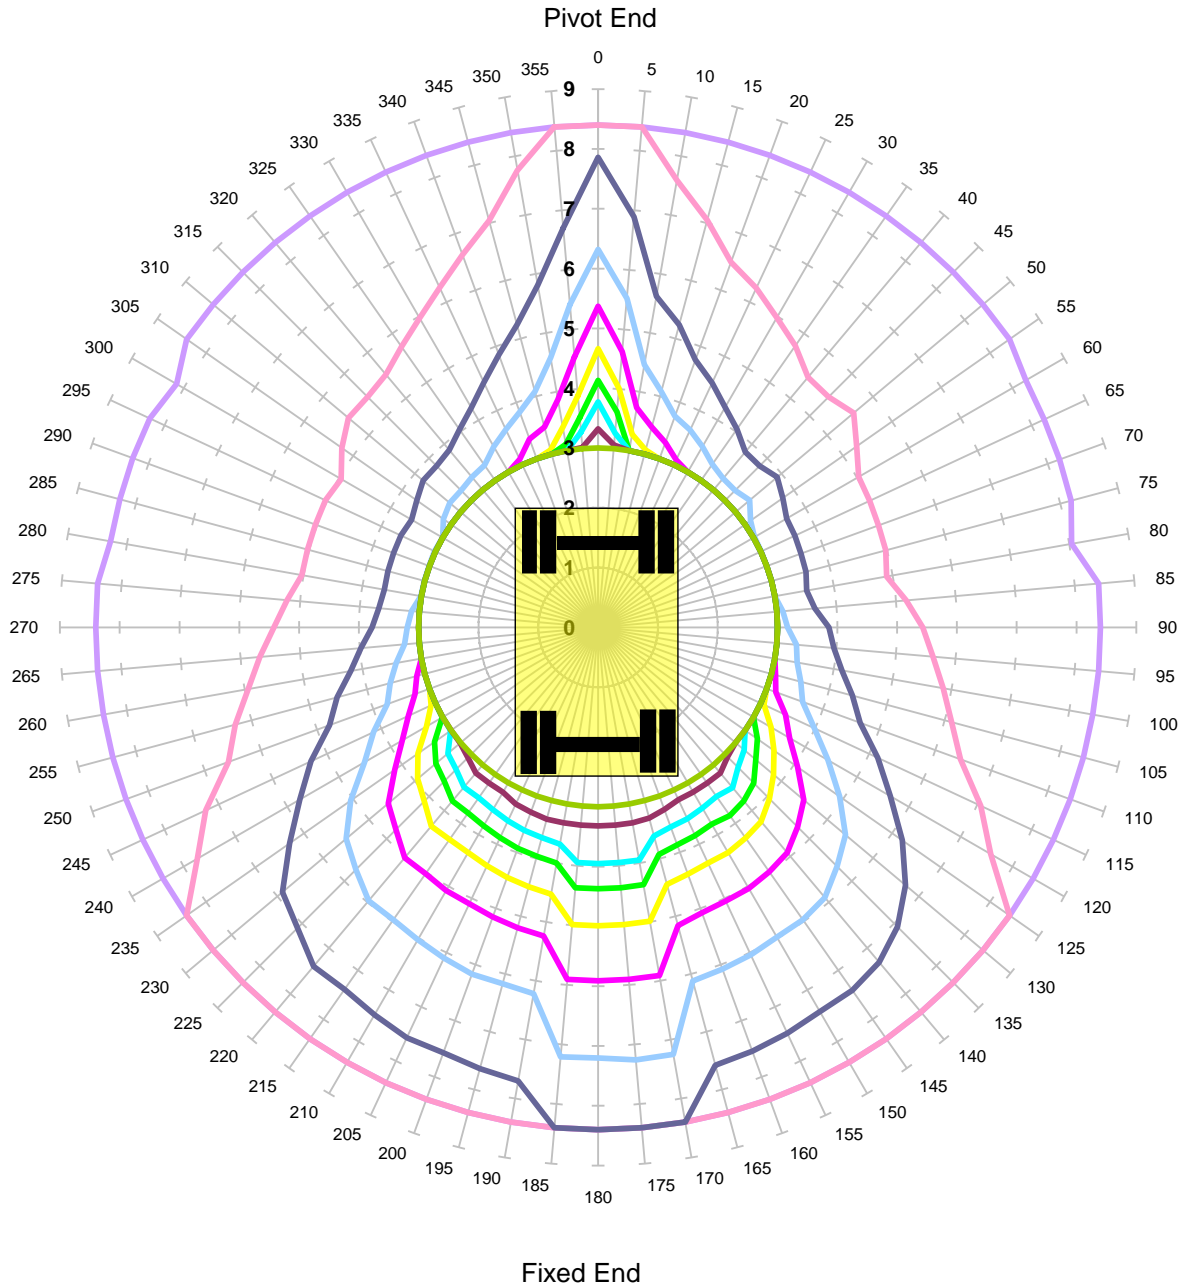


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 71.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift QH
Locked Road

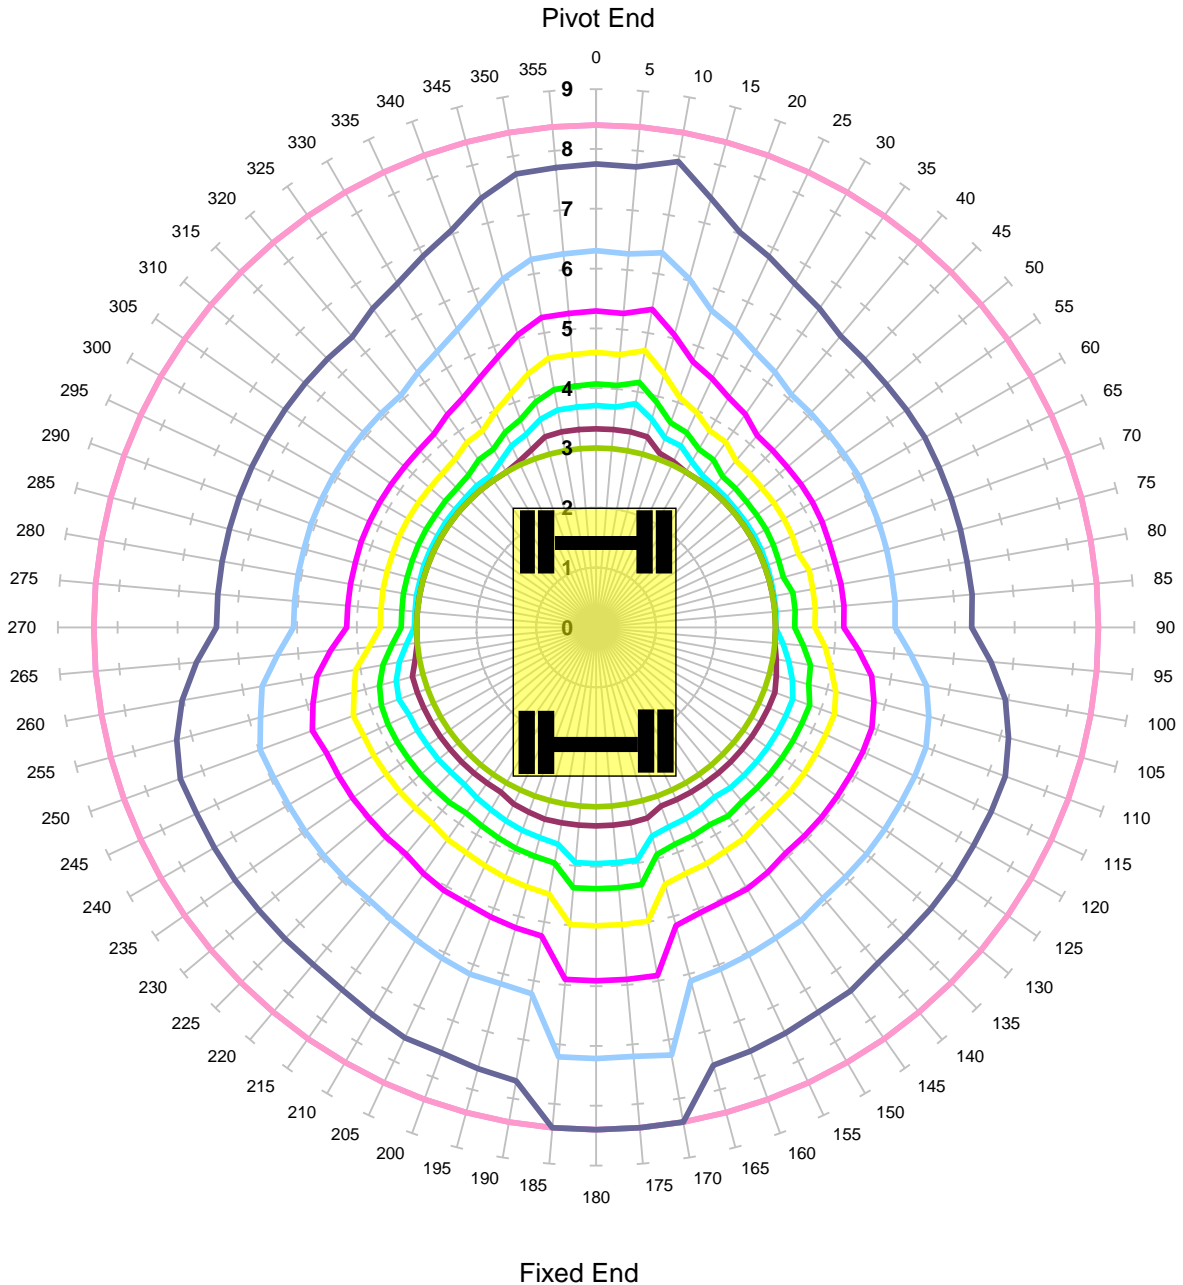


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 71.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant -150mm - Tandem Lift

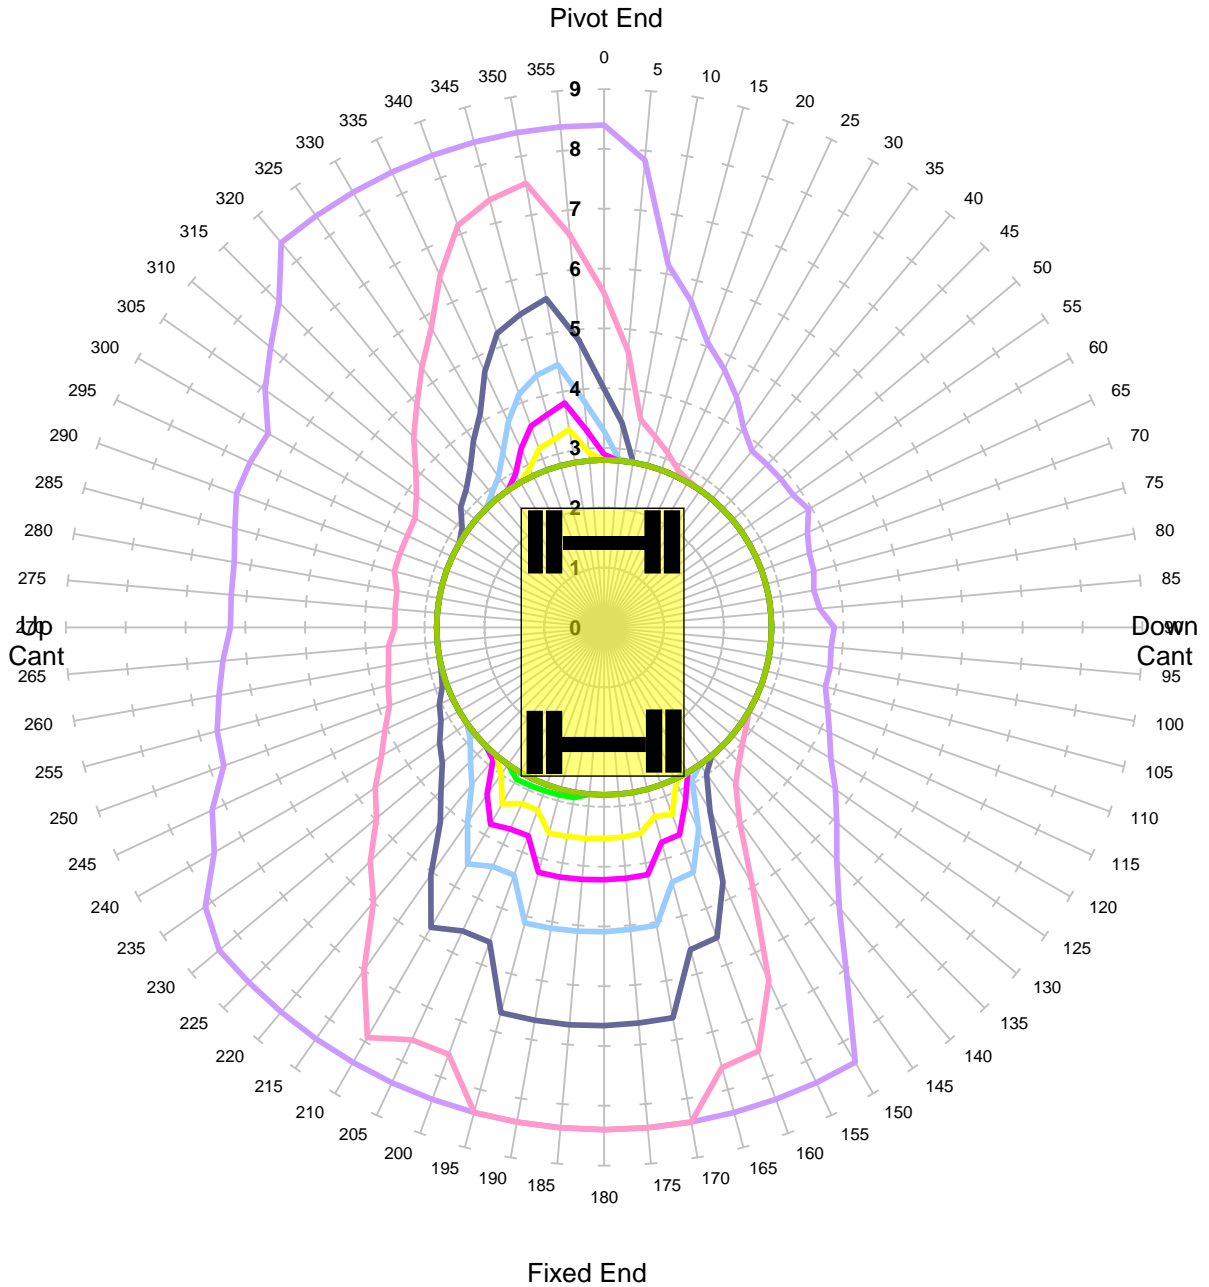


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 44.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant -50mm - Tandem Lift

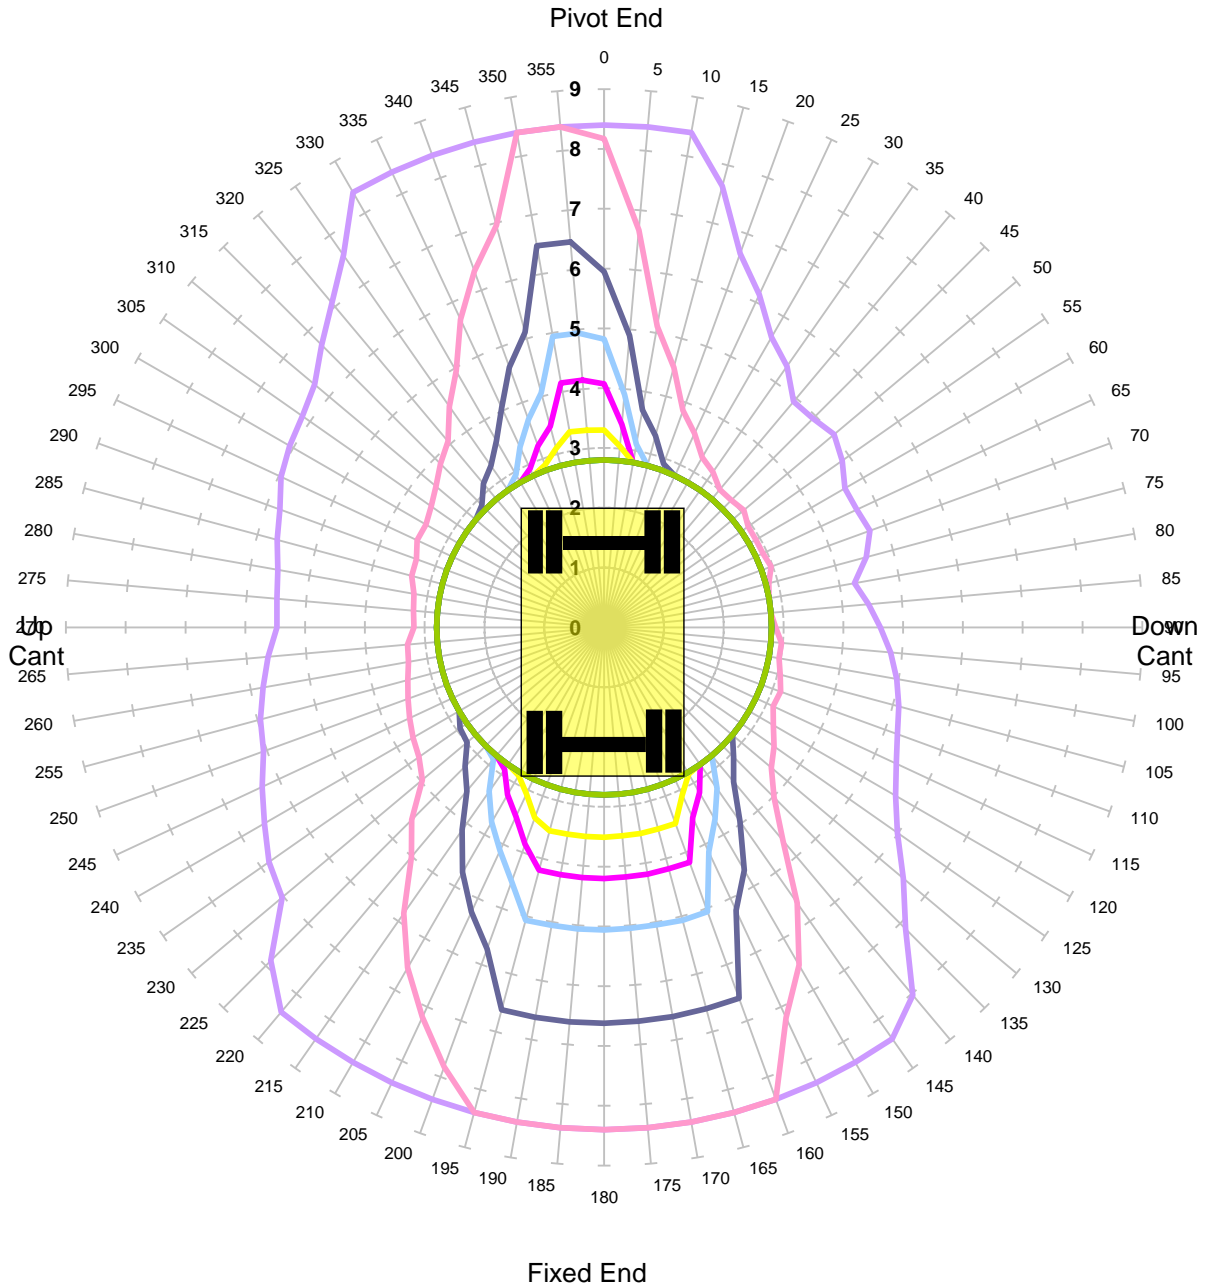


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 44.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant 50mm - Tandem Lift

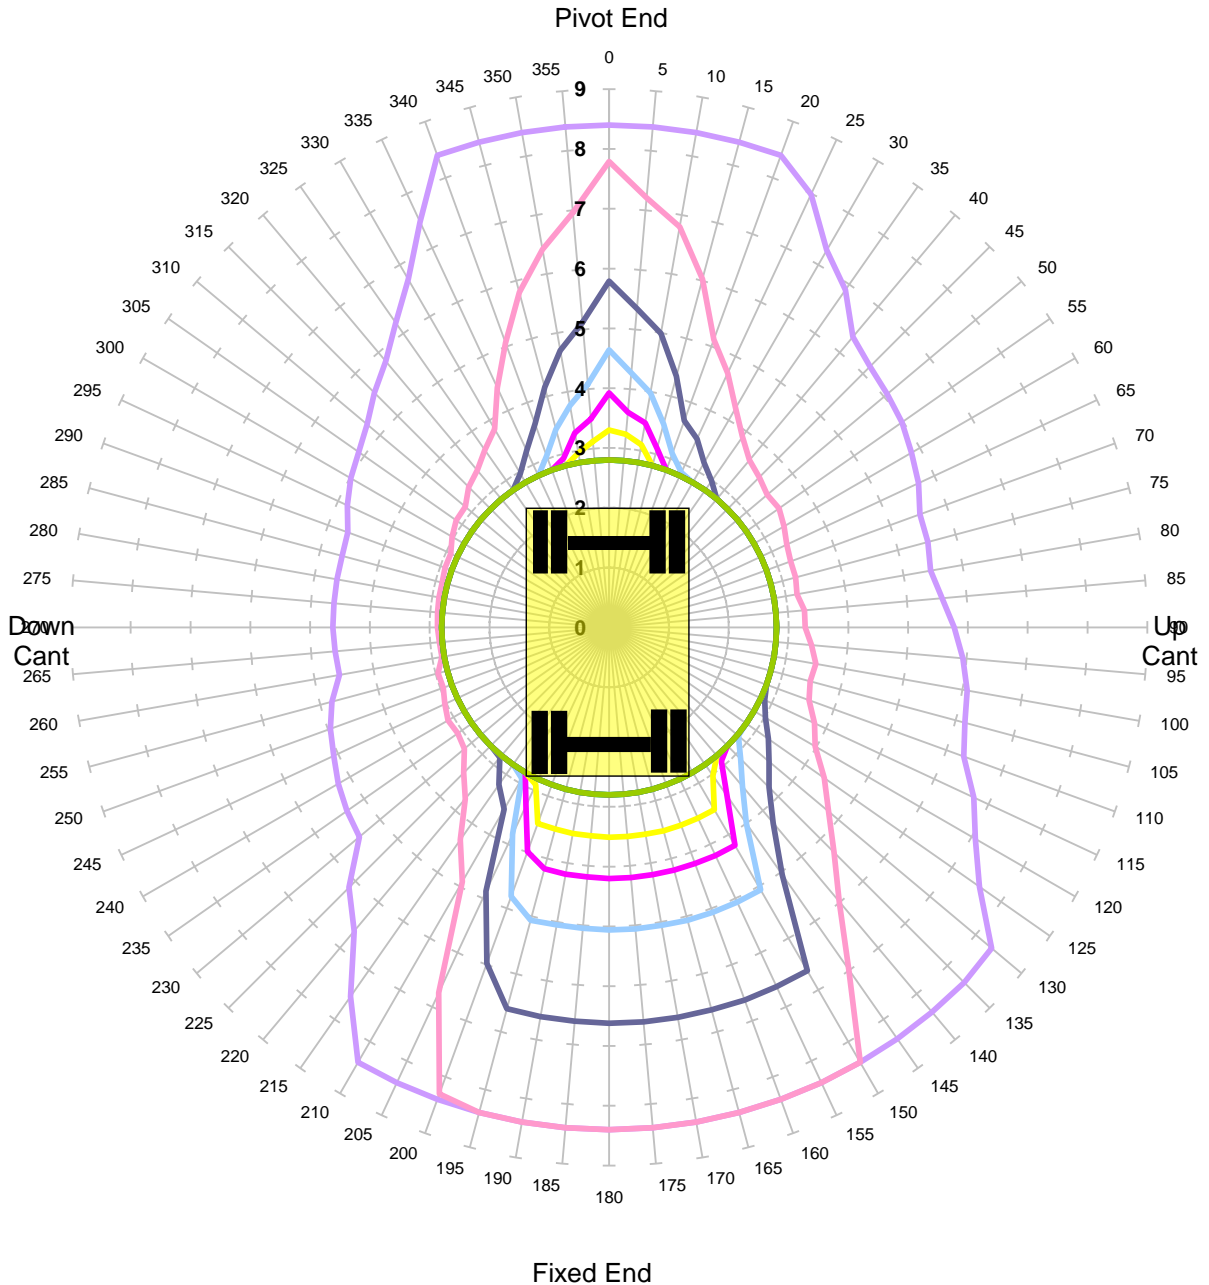


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 44.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant 150mm - Tandem Lift

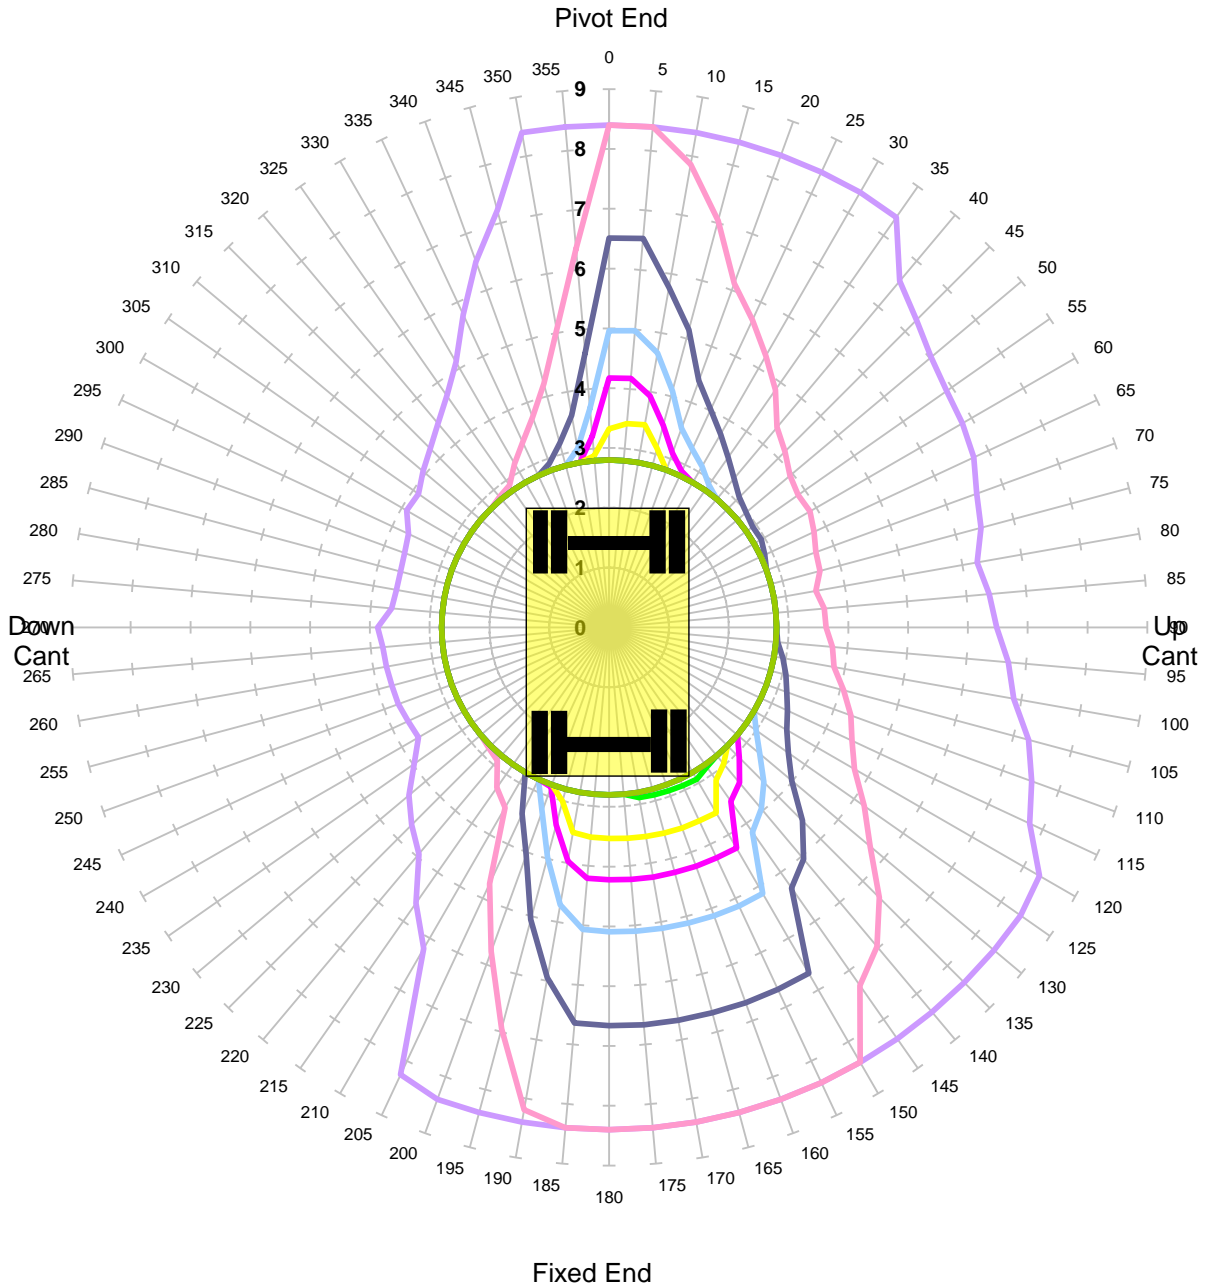


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 44.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant -150mm - Tandem Lift

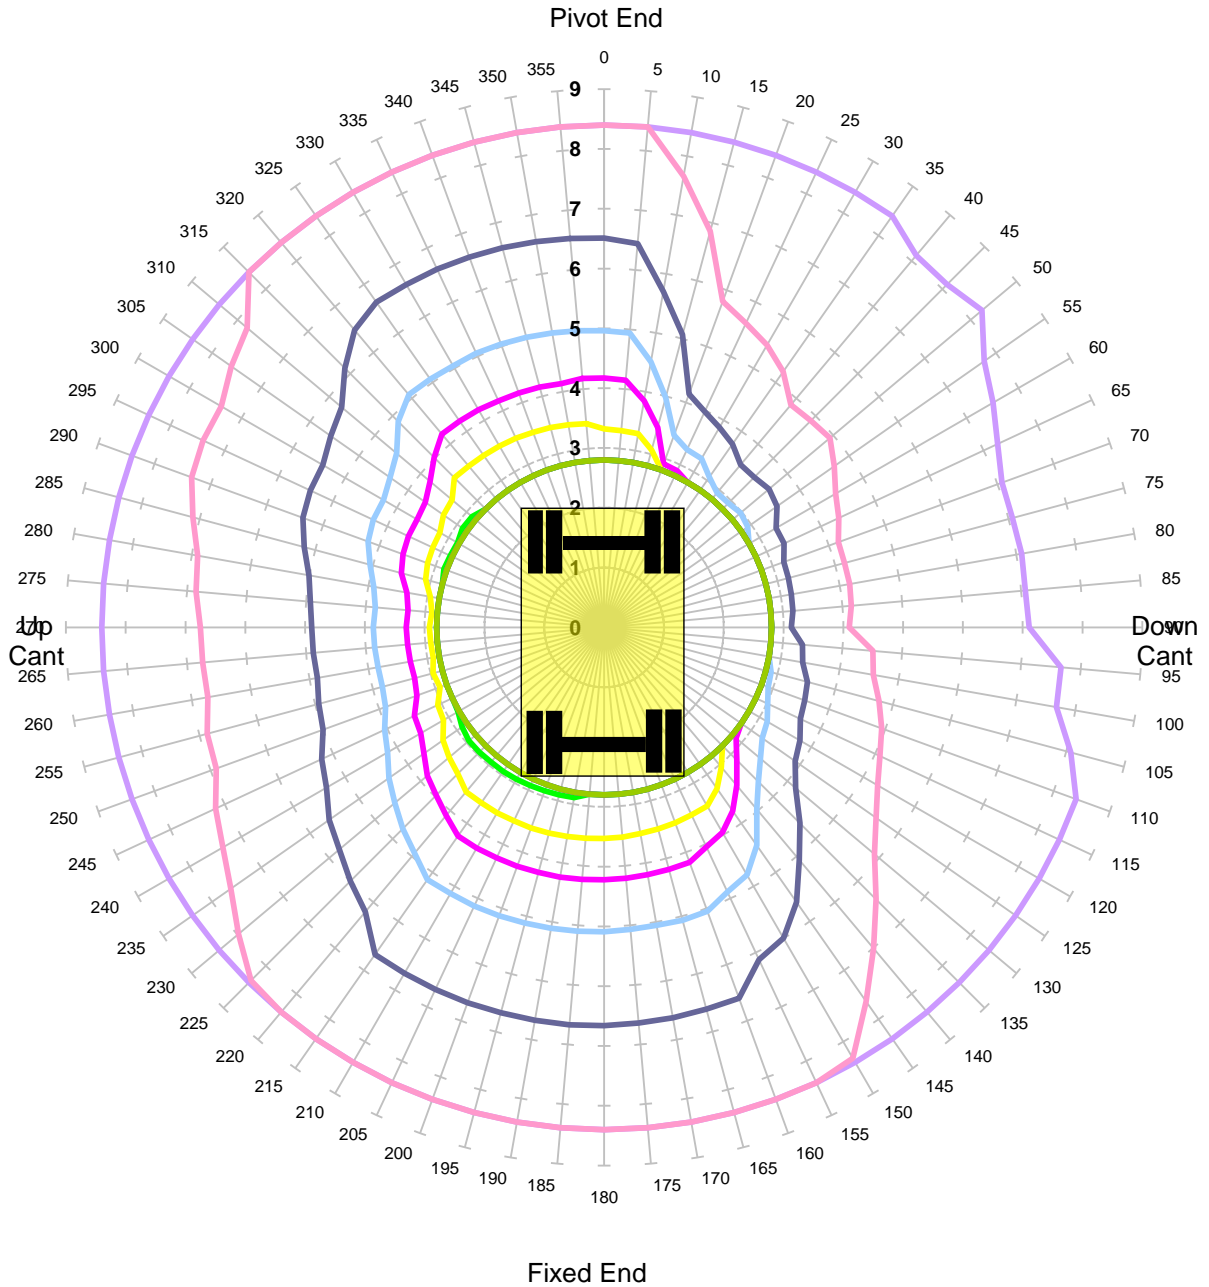


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 59.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant -50mm - Tandem Lift

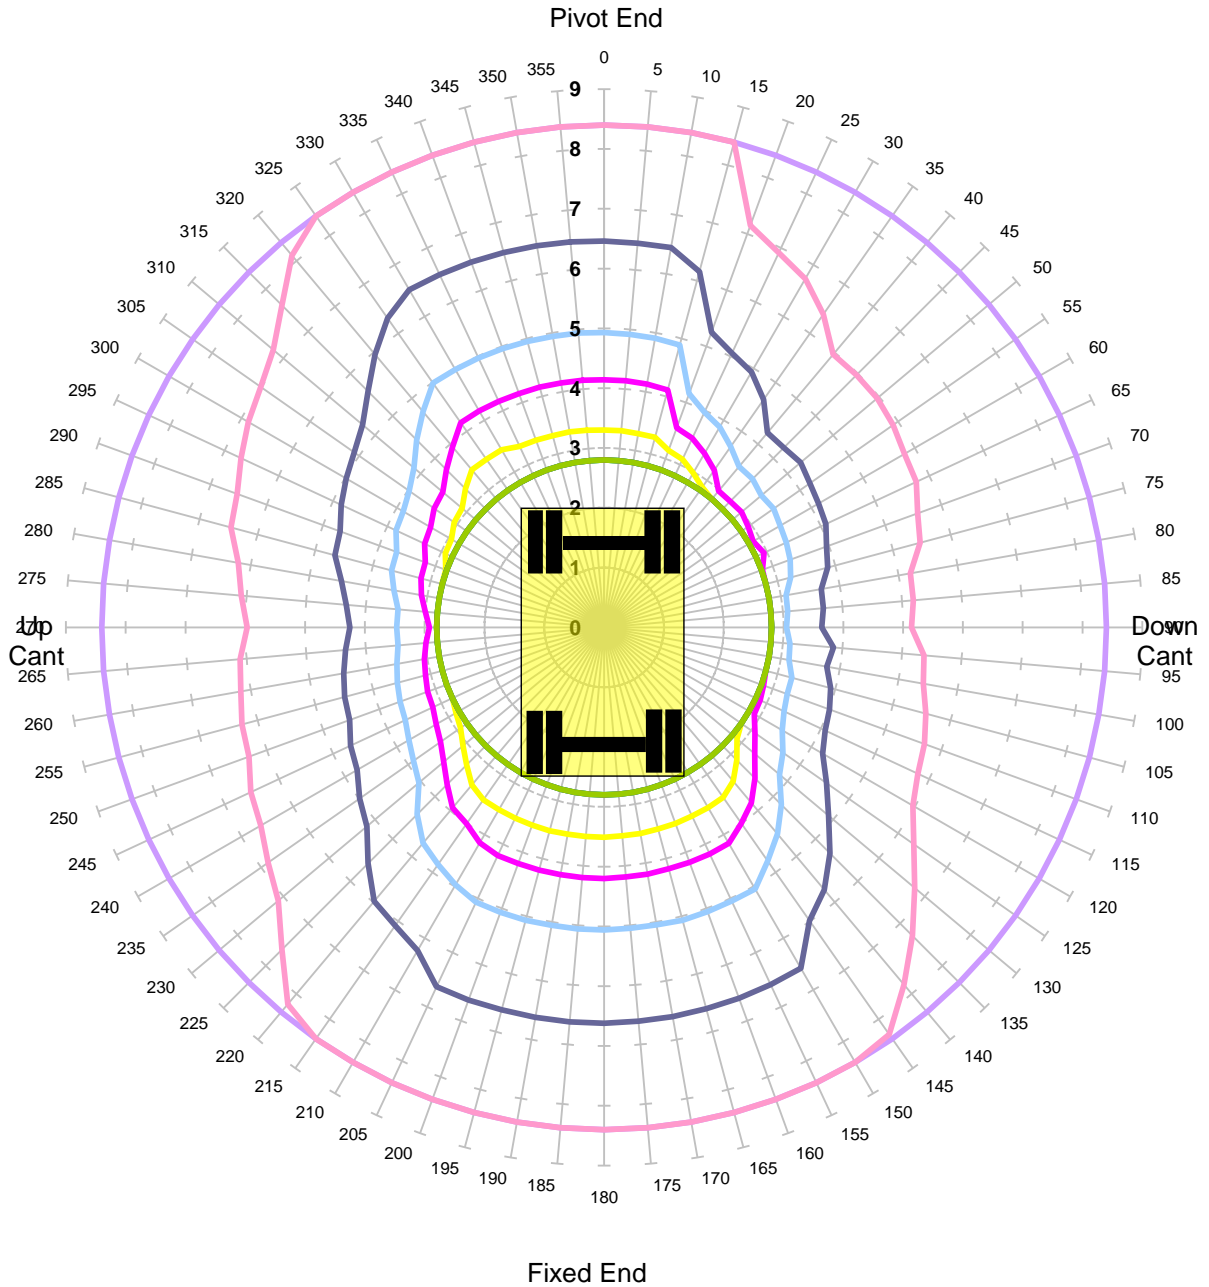


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 59.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant 50mm - Tandem Lift

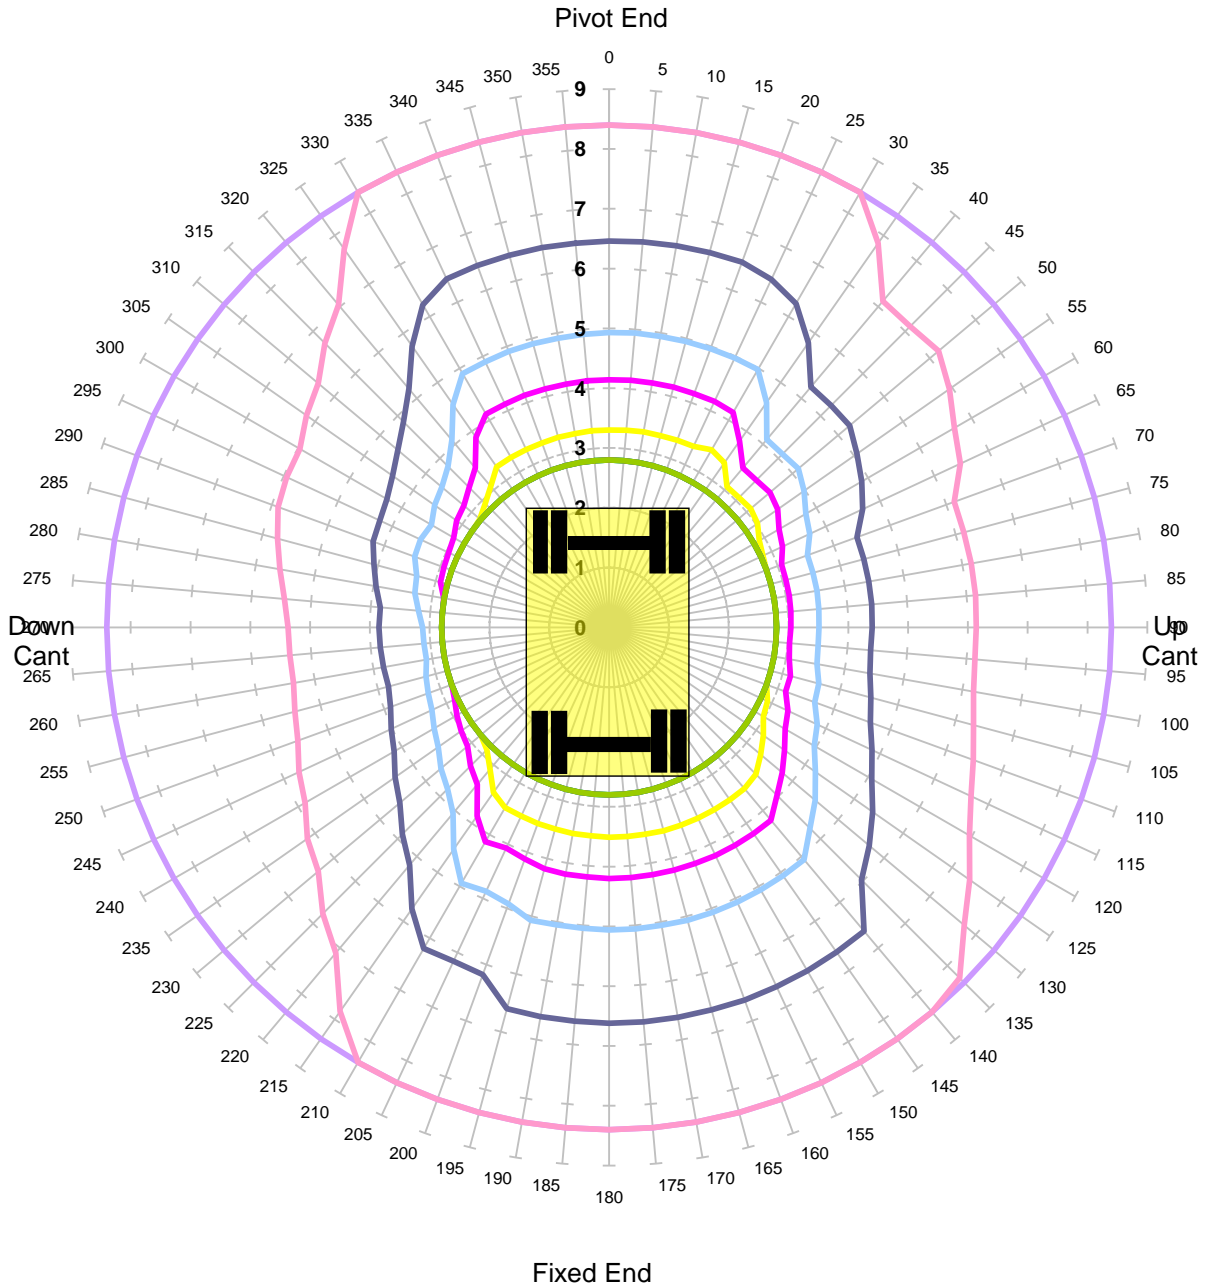


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 59.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant 150mm - Tandem Lift

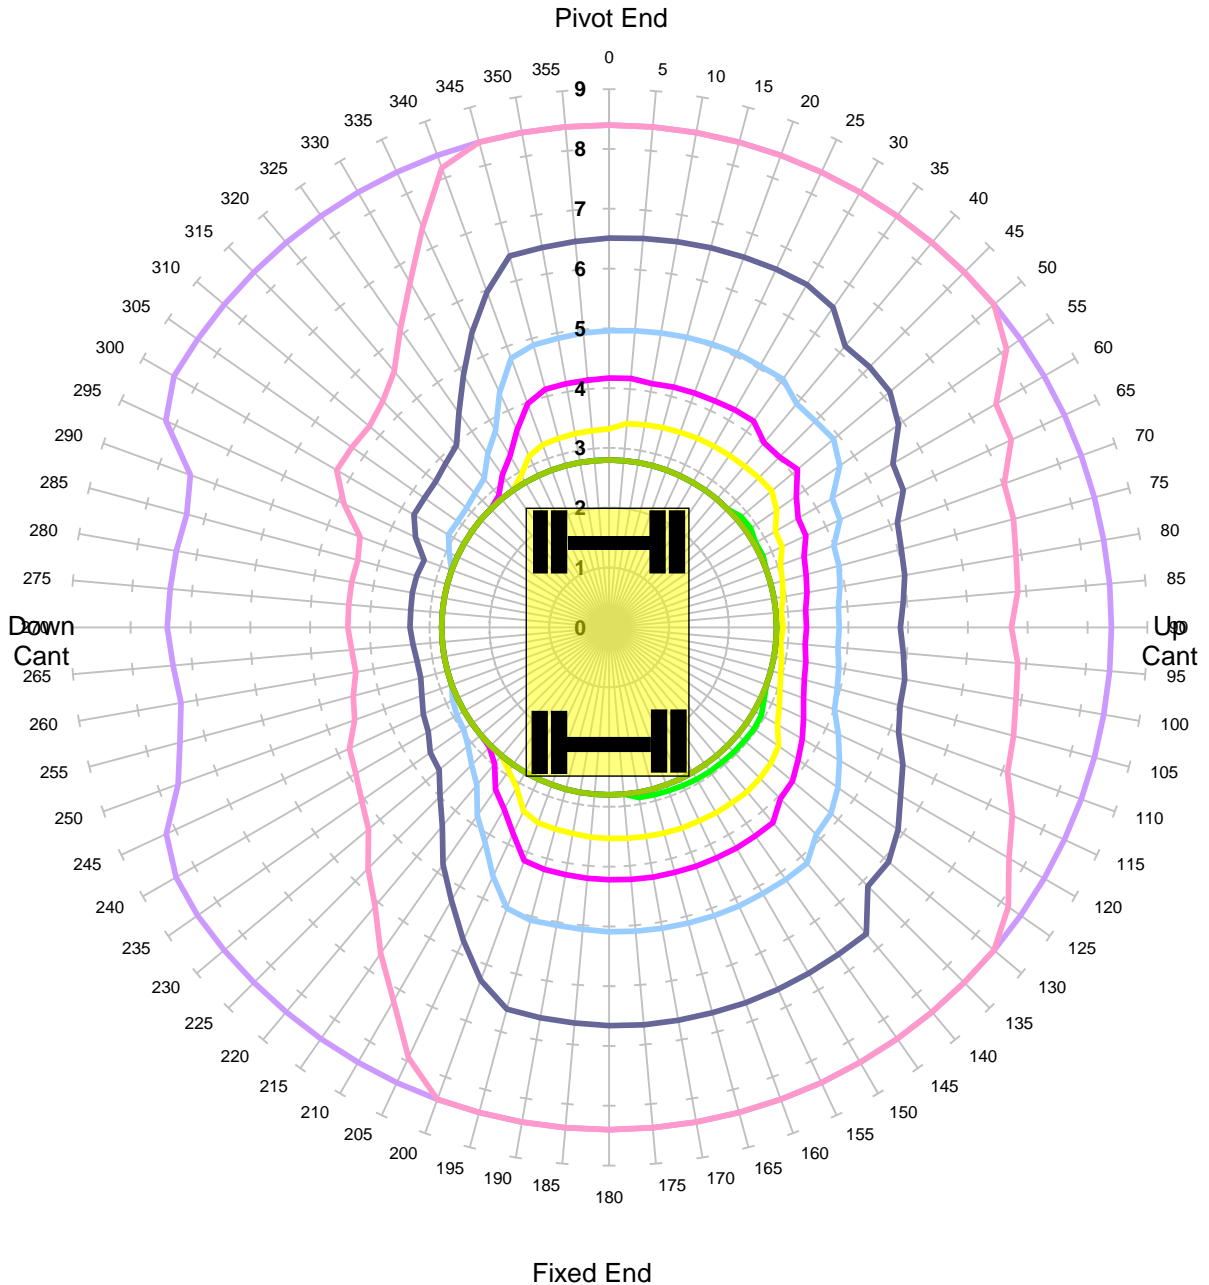


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 59.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift QH
Unlocked Road - Tandem Lift

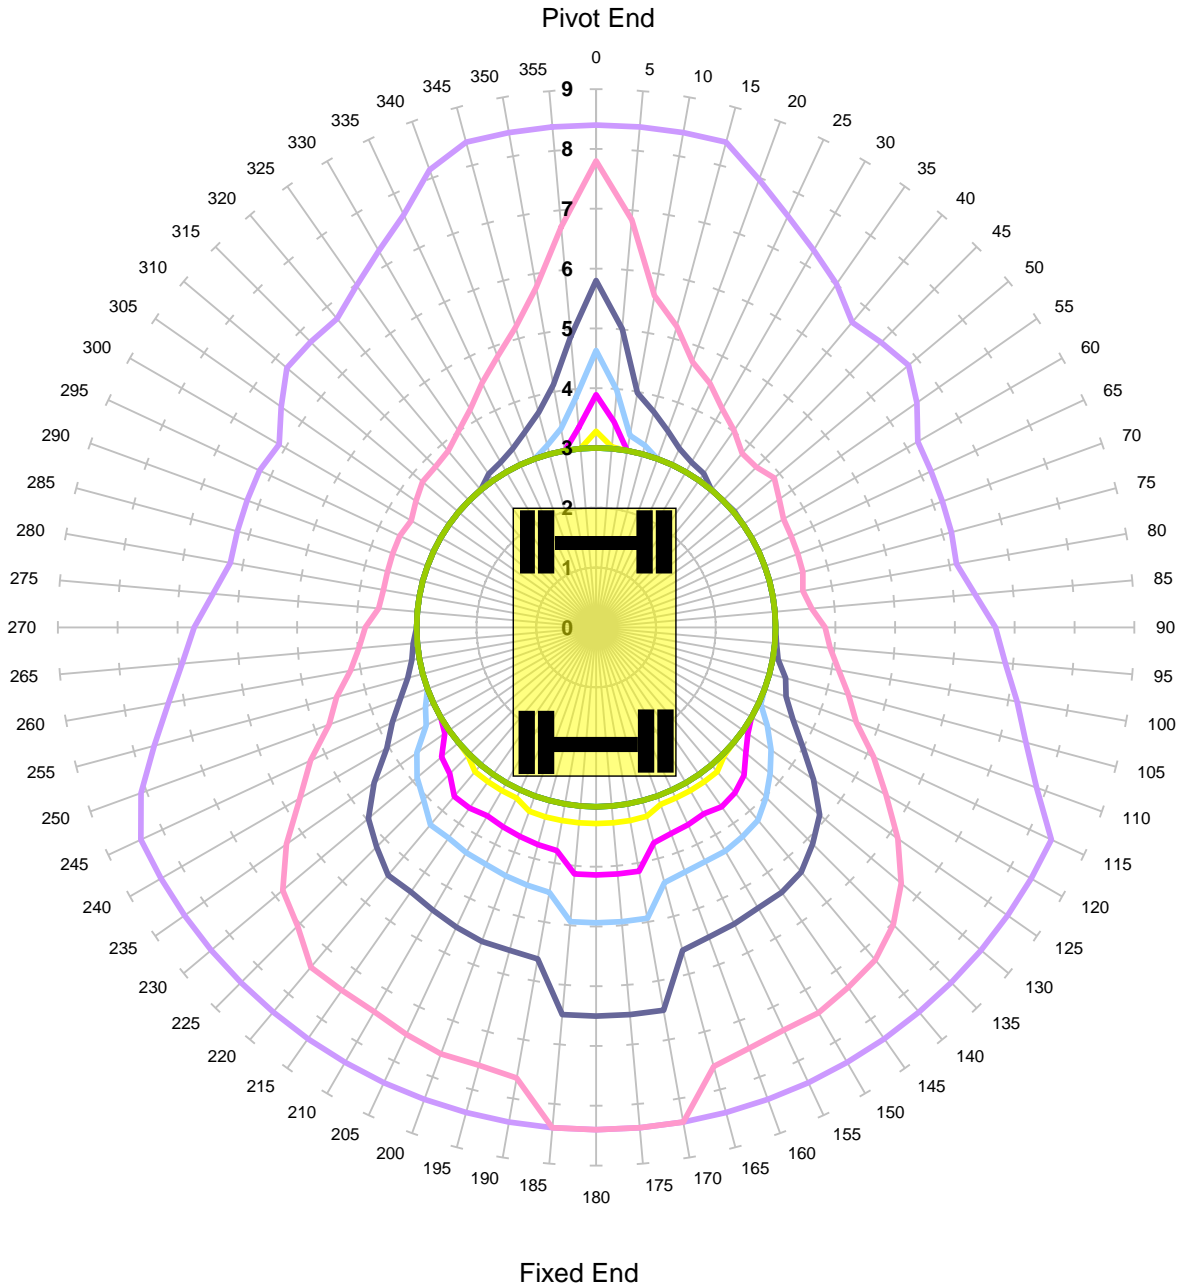


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 47.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift QH
Locked Road - Tandem Lift

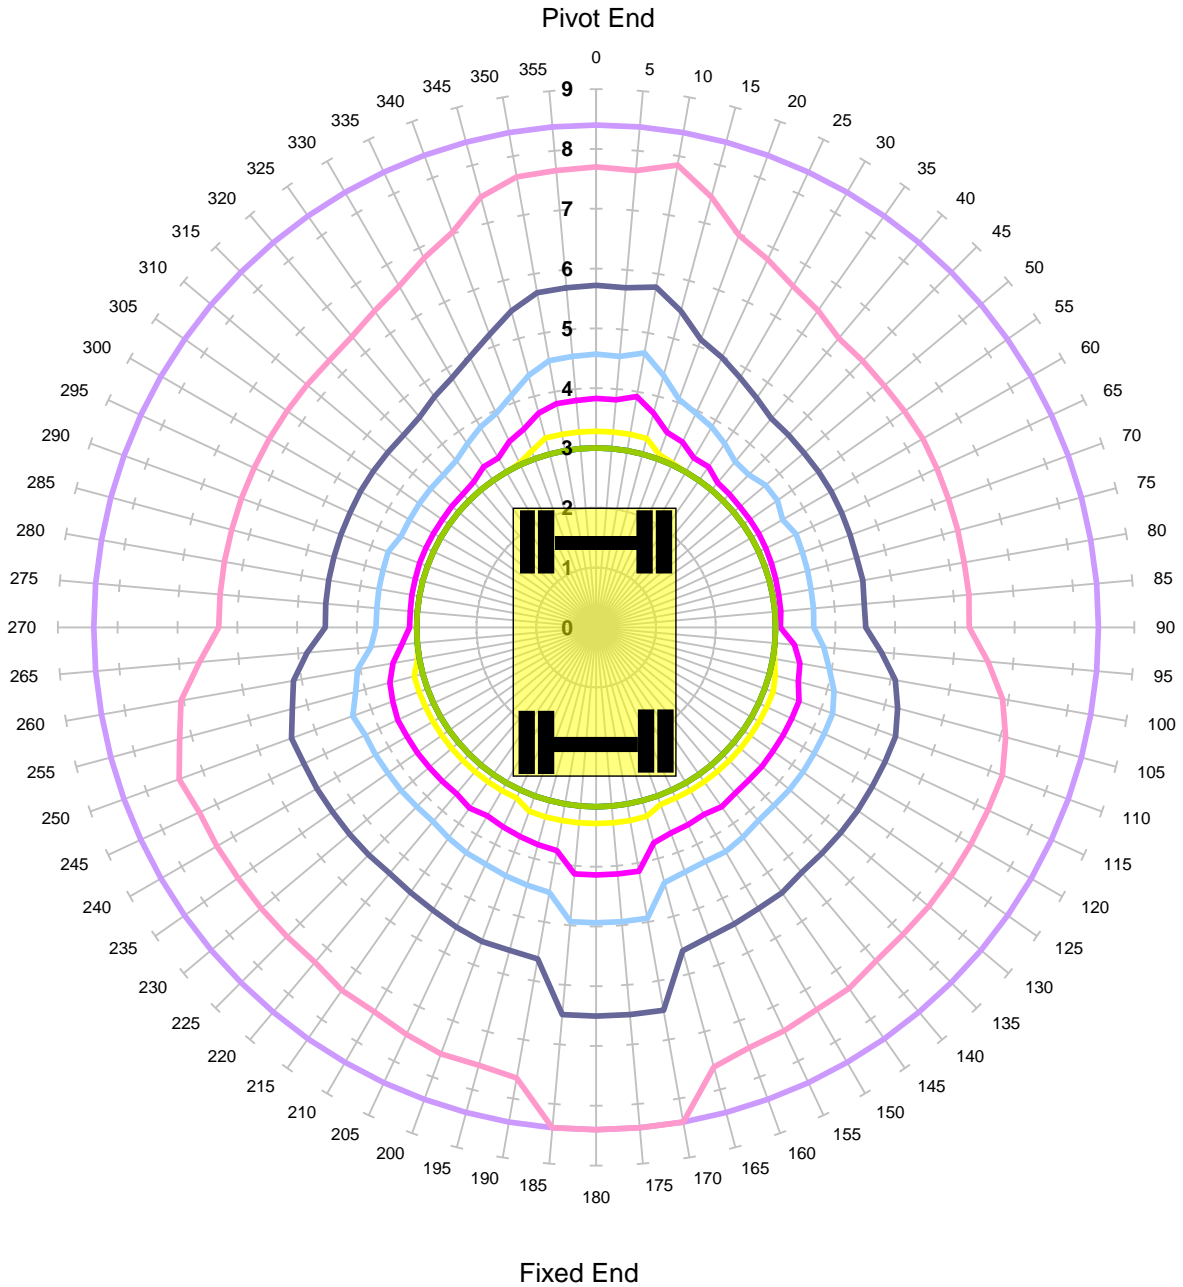


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 47.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Gradient 1 in -25 Height 2m Lift JIBLP
Unlocked Rail Cant -150mm

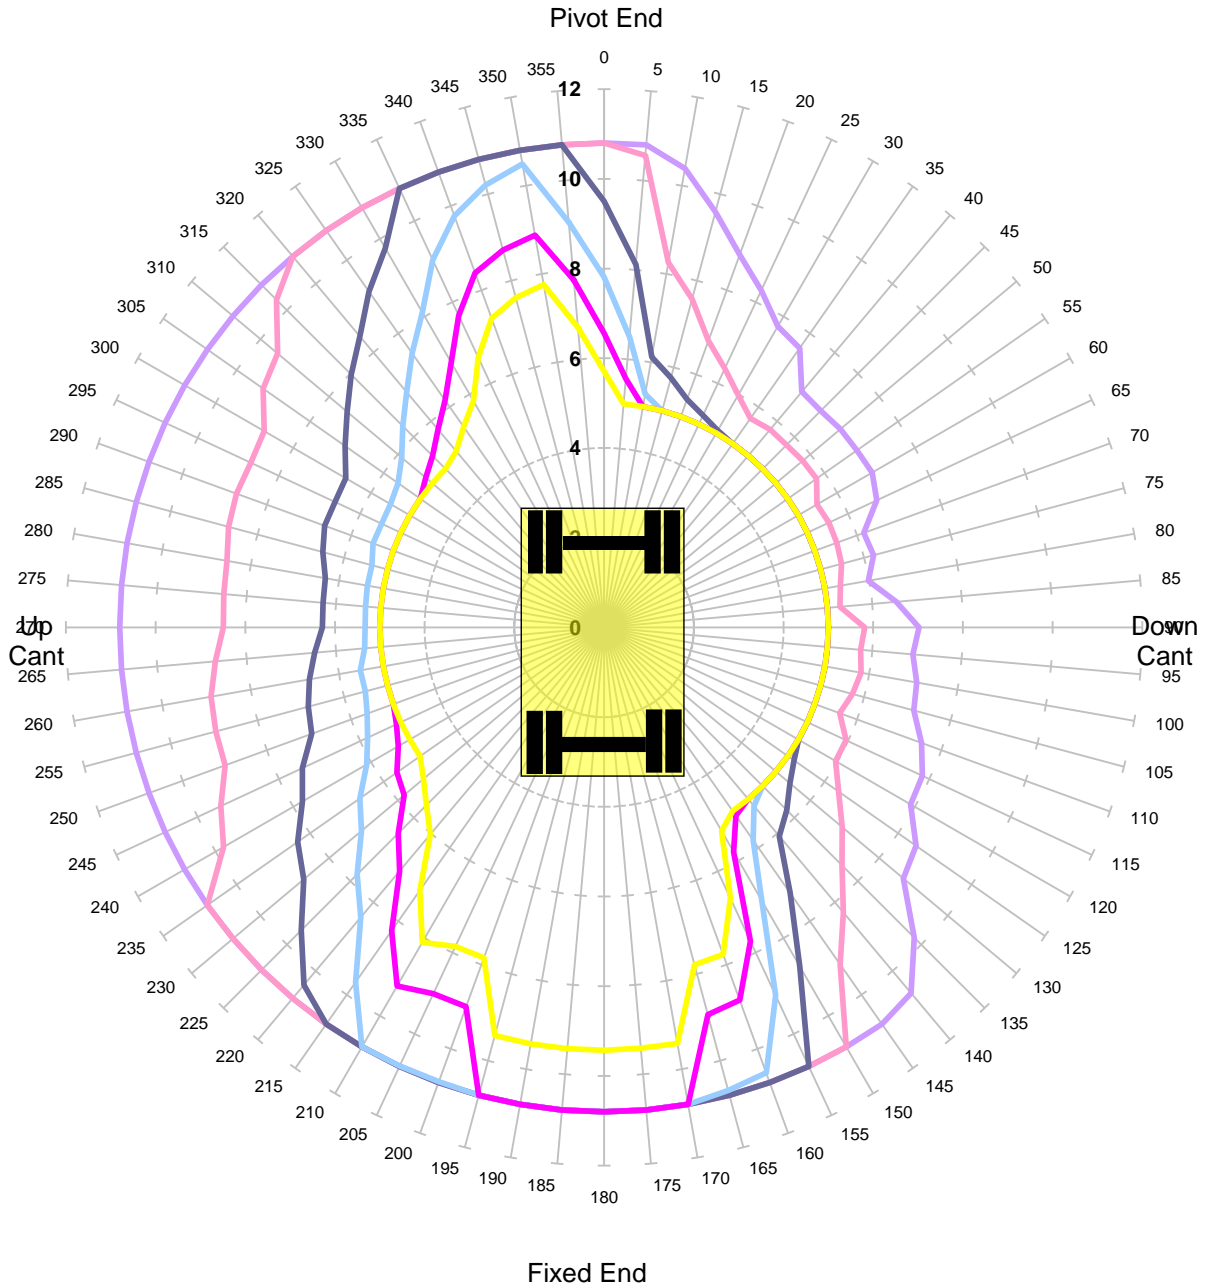


Units in Tonnes

— 0.5 — 1 — 1.5 — 2 — 2.5 — 3

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 67.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Gradient 1 in -25 Height 2m Lift JIBLP
Unlocked Rail Cant -50mm

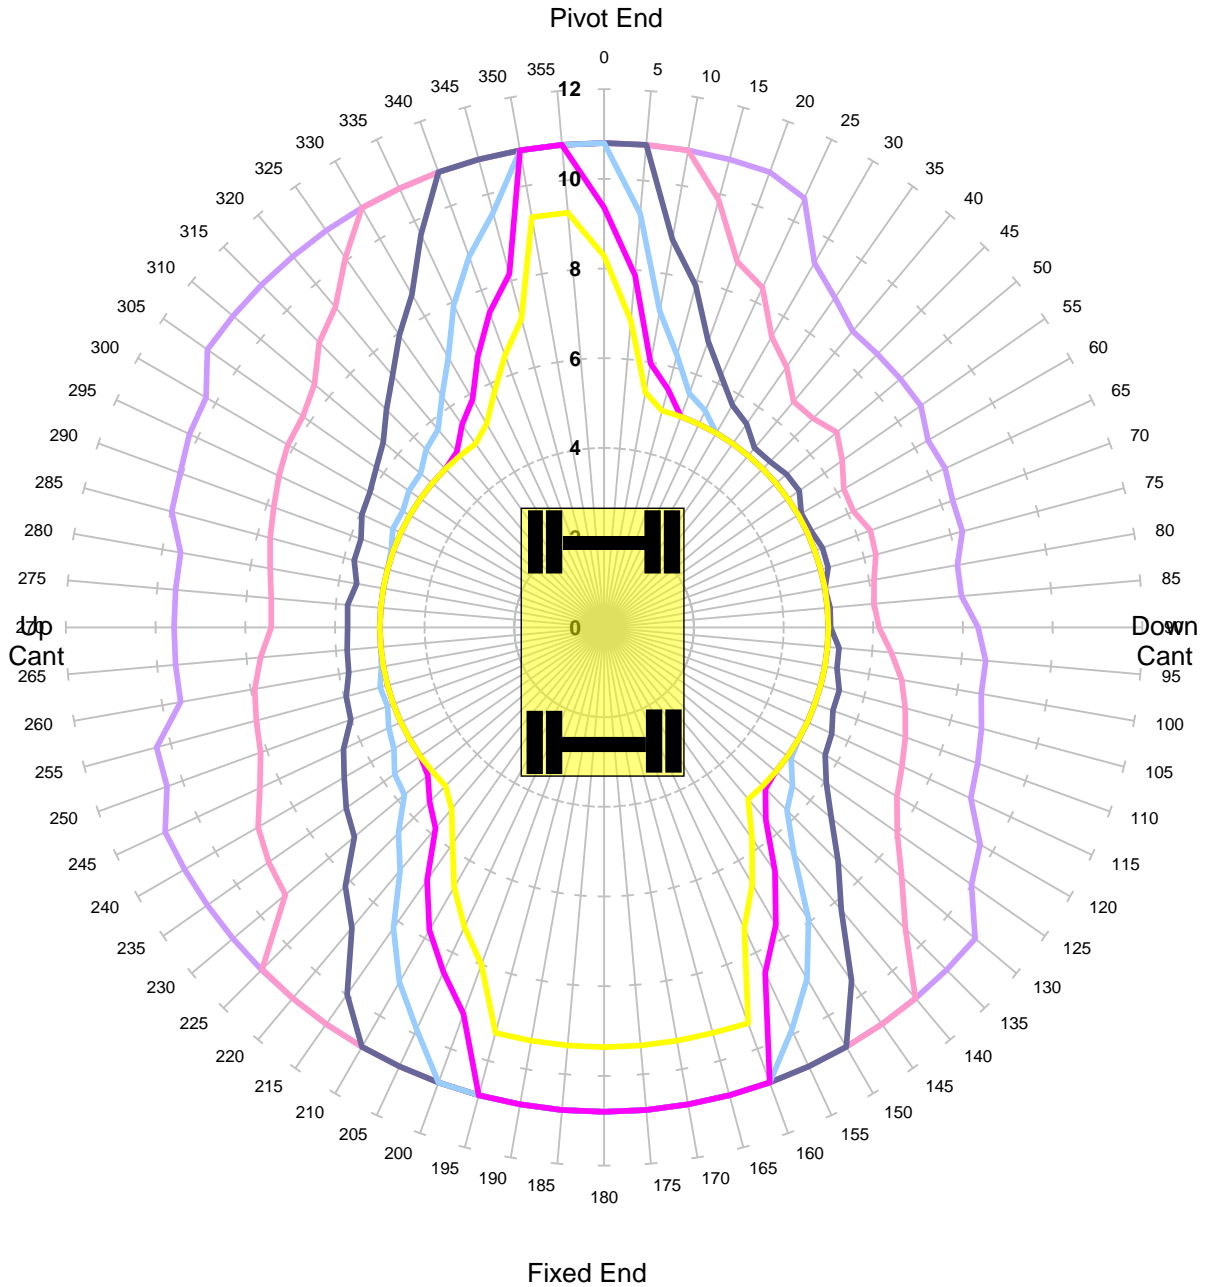


Units in Tonnes

— 0.5 — 1 — 1.5 — 2 — 2.5 — 3

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 67.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Gradient 1 in -25 Height 2m Lift JIBLP
Unlocked Rail Cant 50mm

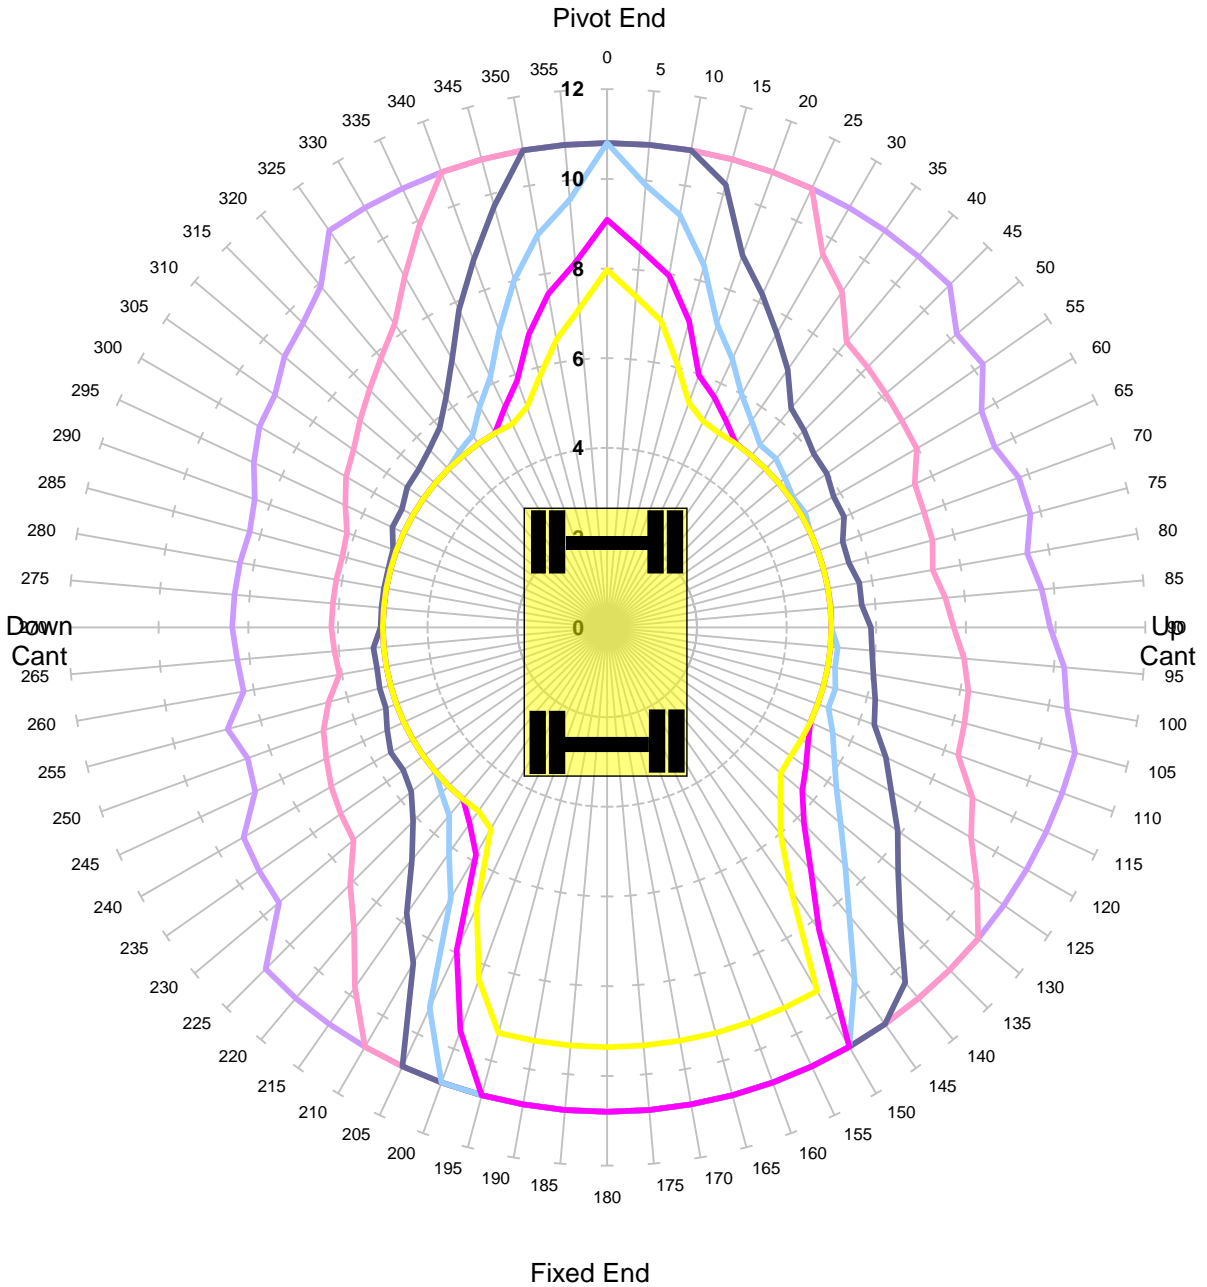


Units in Tonnes

— 0.5 — 1 — 1.5 — 2 — 2.5 — 3

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 67.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Gradient 1 in -25 Height 2m Lift JIBLP
Unlocked Rail Cant 150mm

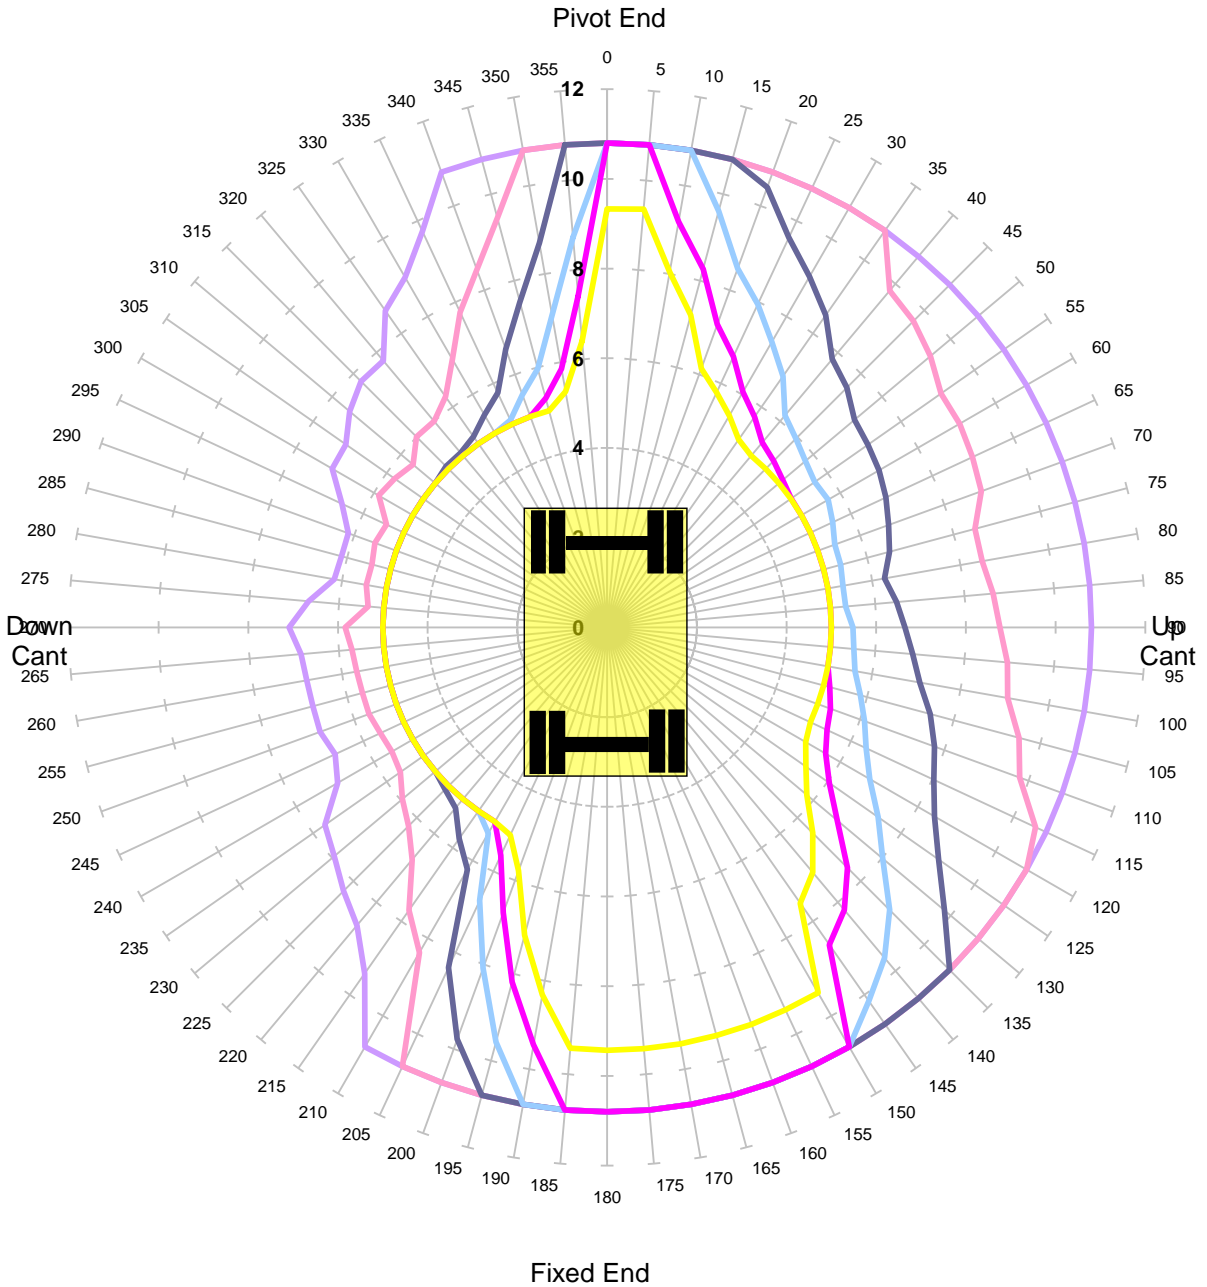


Units in Tonnes

— 0.5 — 1 — 1.5 — 2 — 2.5 — 3


| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 67.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Gradient 1 in -25 Height 2m Lift JIBLP
Locked Rail Cant -150mm

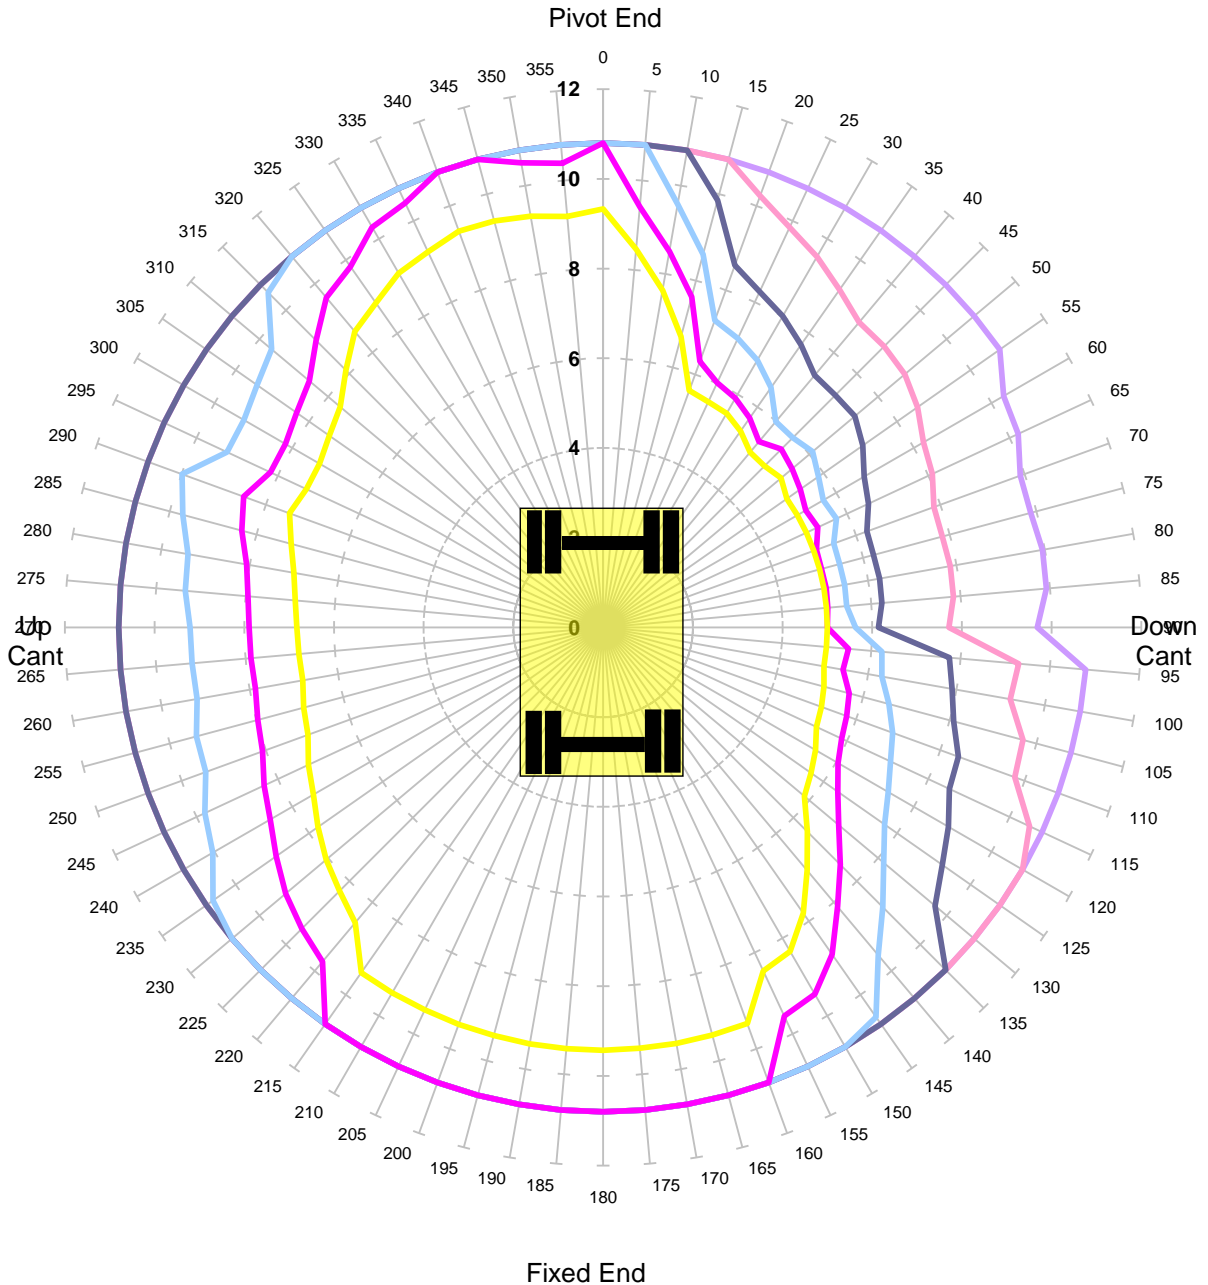

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 90.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Gradient 1 in -25 Height 2m Lift JIBLP
Locked Rail Cant -50mm

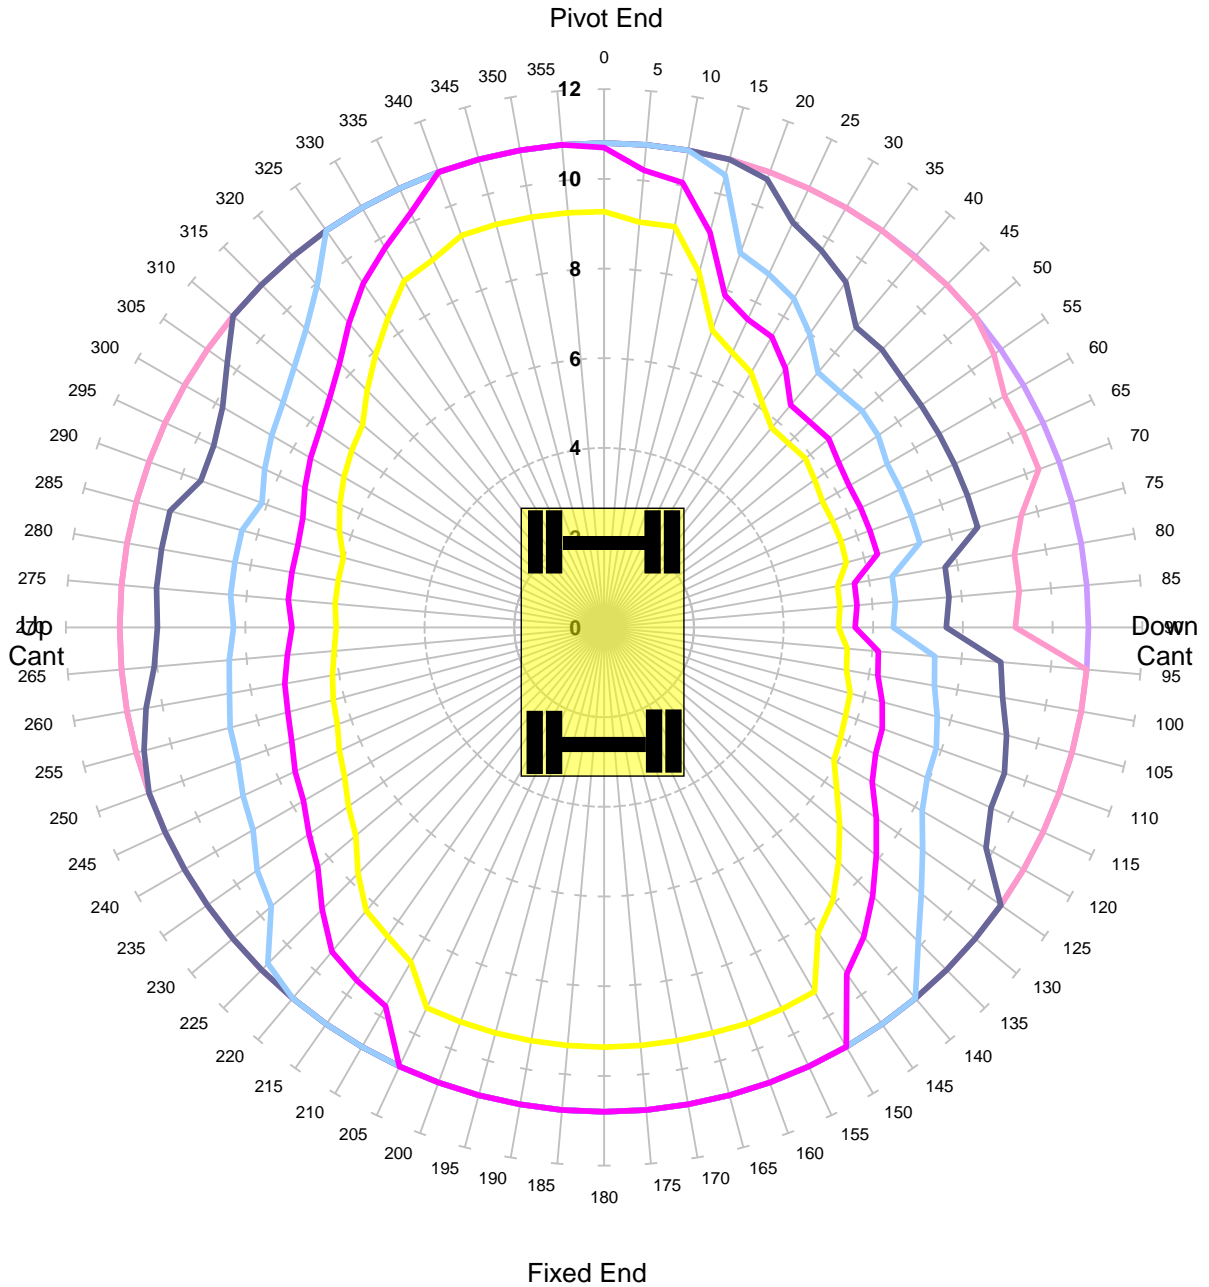


Units in Tonnes

— 0.5 — 1 — 1.5 — 2 — 2.5 — 3

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 90.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Gradient 1 in -25 Height 2m Lift JIBLP
Locked Rail Cant 50mm

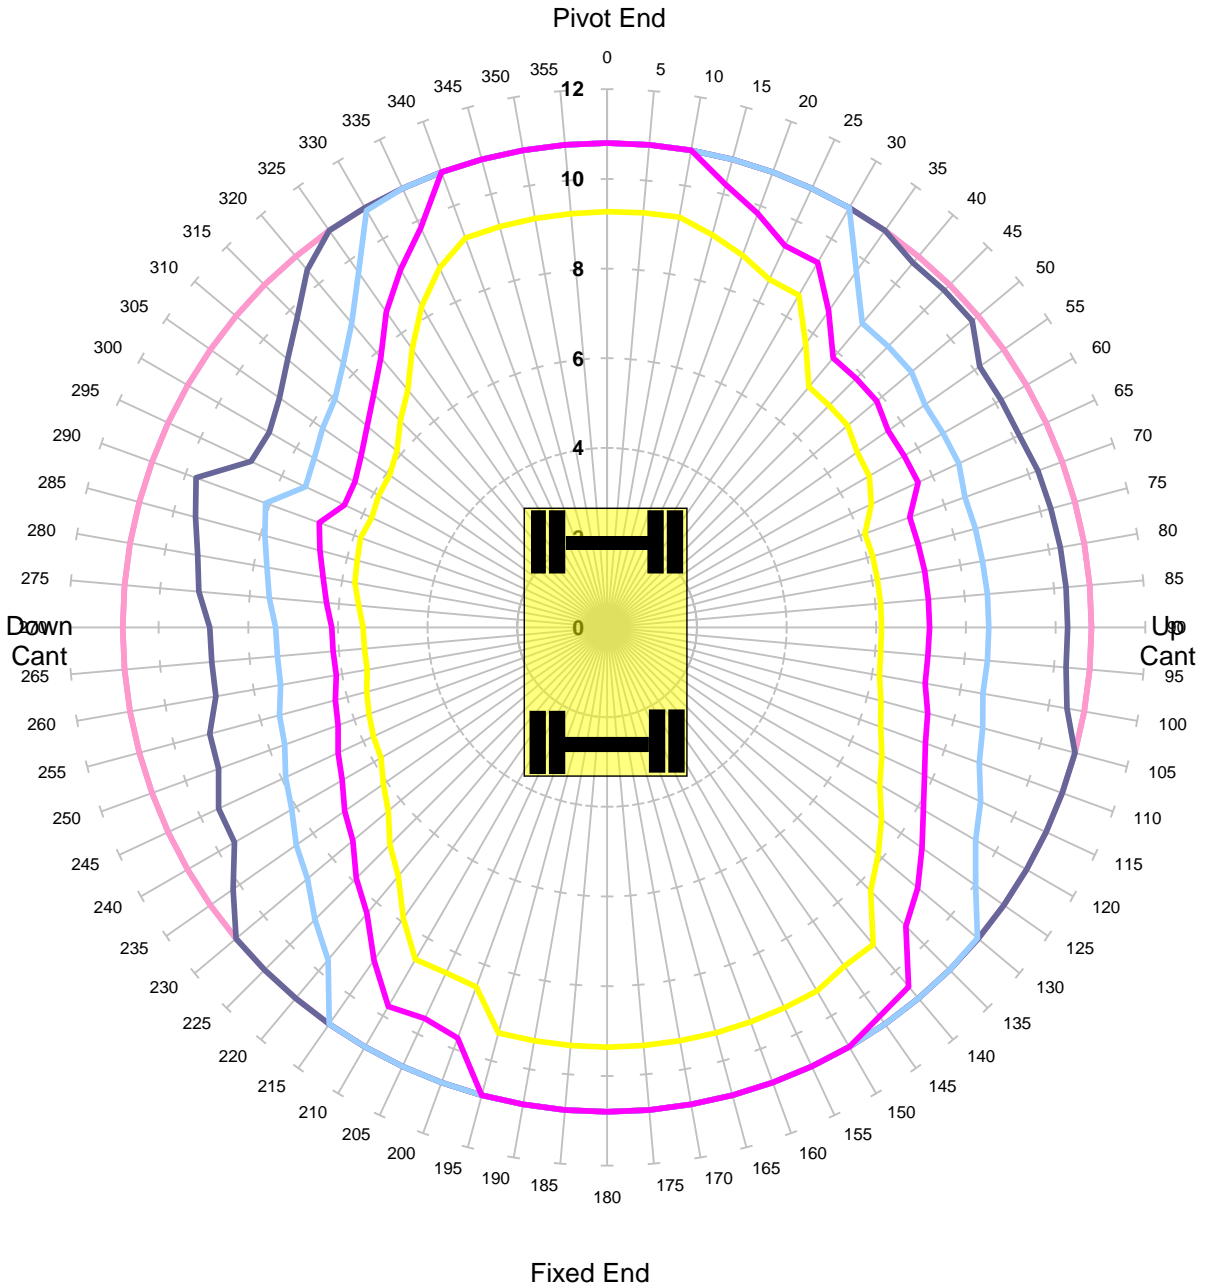


Units in Tonnes

— 0.5 — 1 — 1.5 — 2 — 2.5 — 3

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 90.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Gradient 1 in -25 Height 2m Lift JIBLP
Locked Rail Cant 150mm

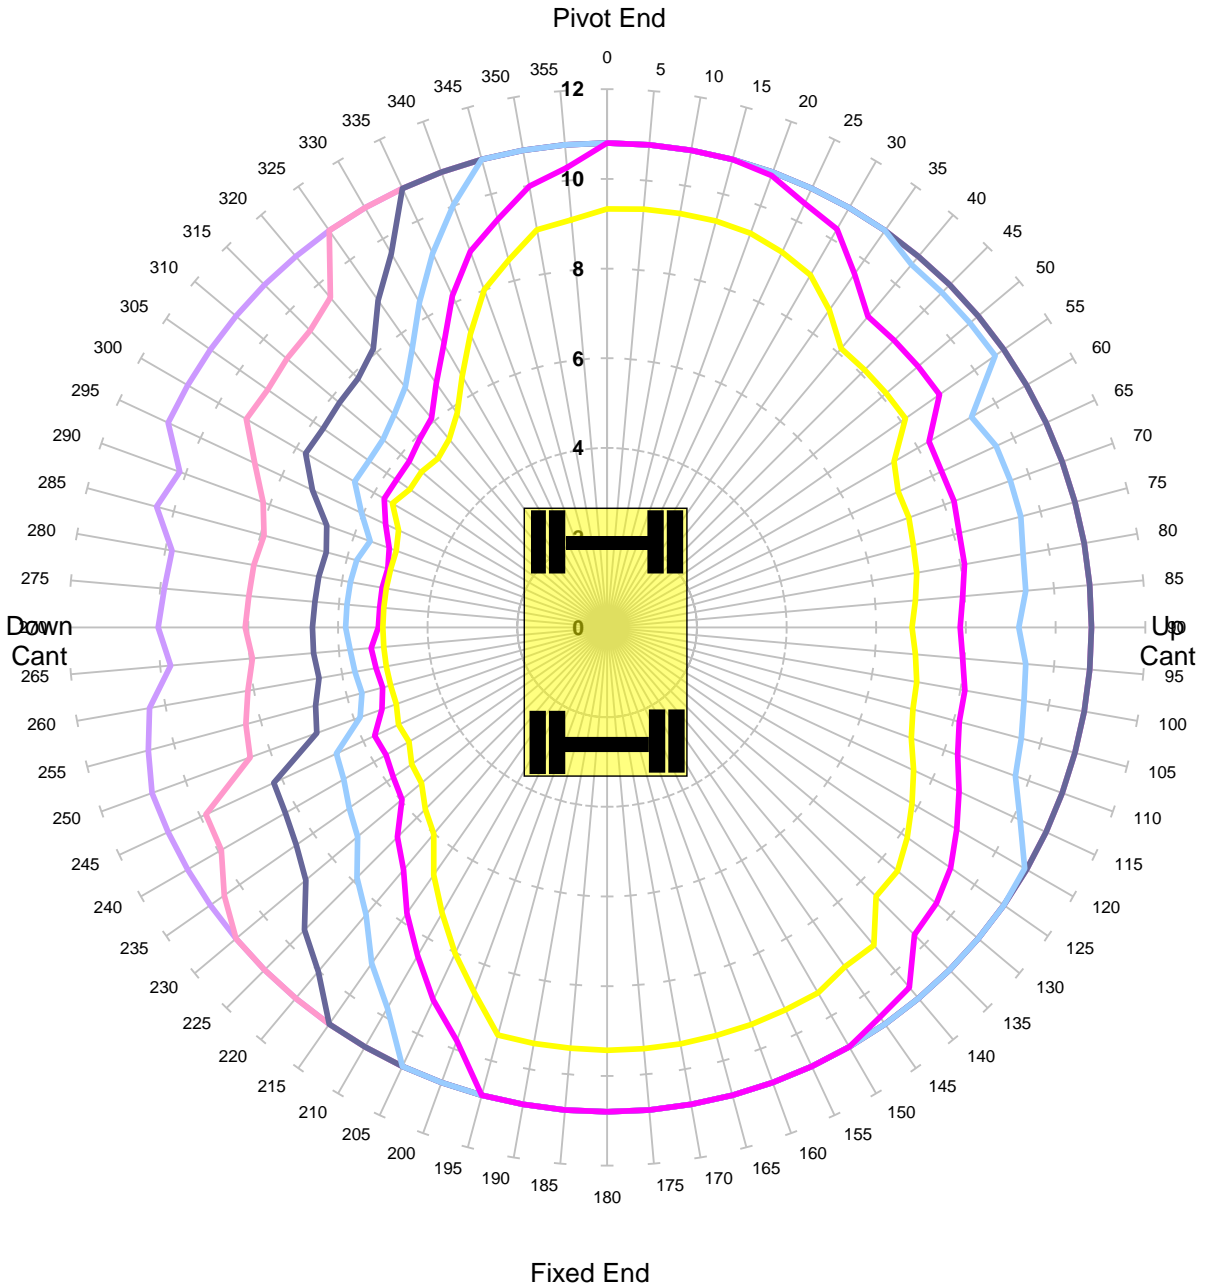


Units in Tonnes

— 0.5 — 1 — 1.5 — 2 — 2.5 — 3

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 90.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Level Ground Height 2m Lift JIBLP
Unlocked Road

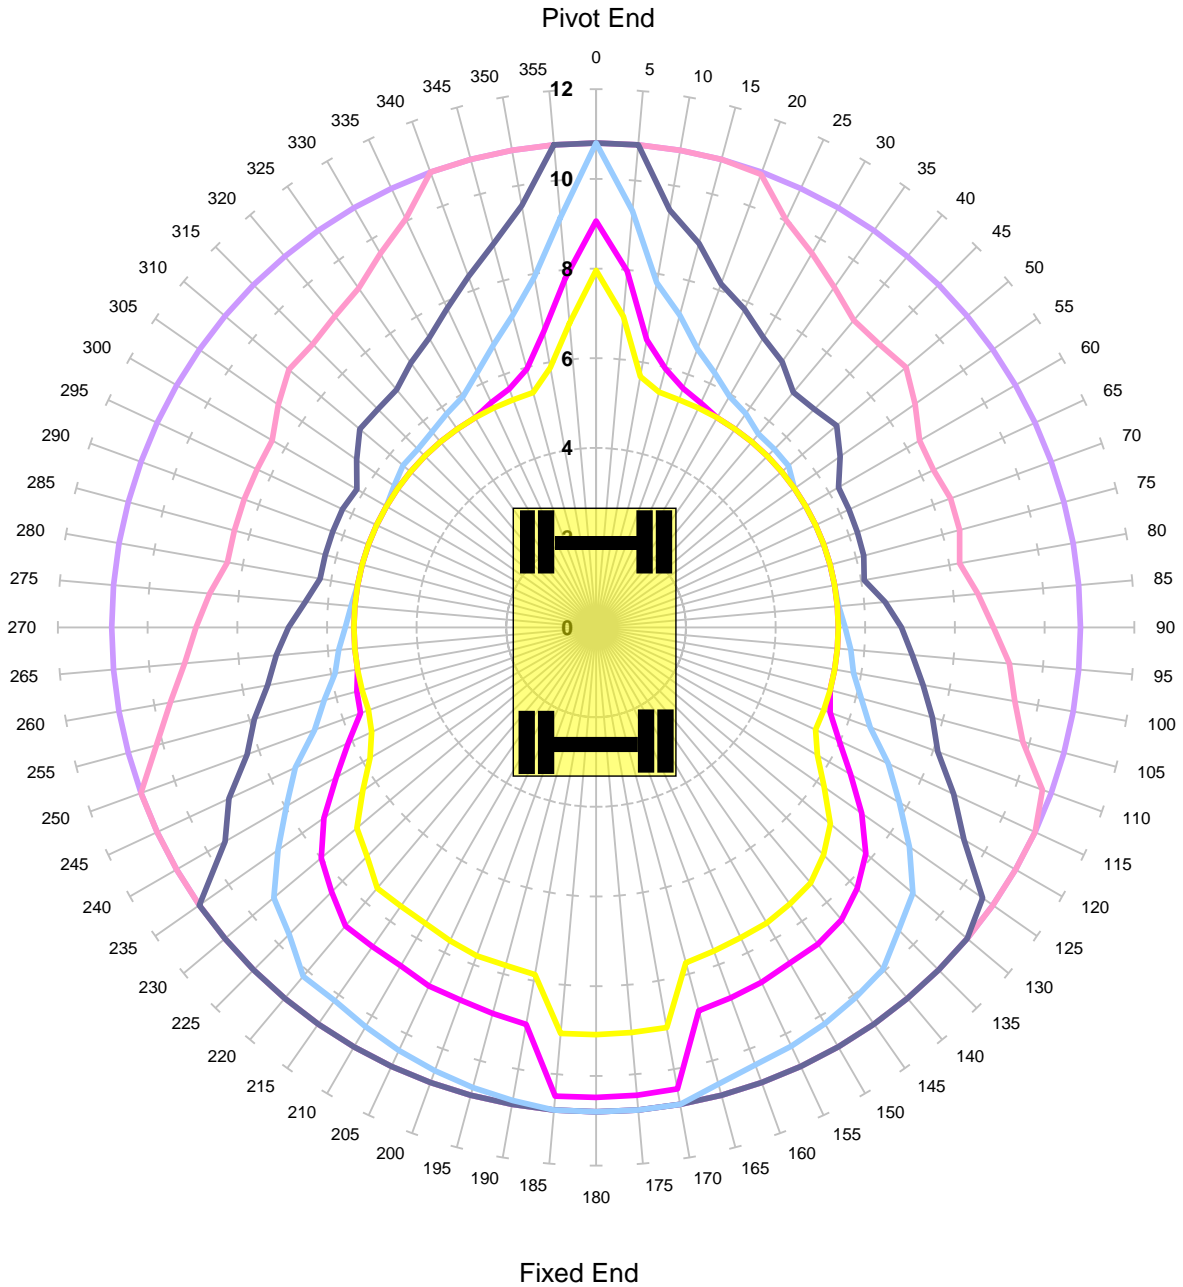


Units in Tonnes

— 0.5 — 1 — 1.5 — 2 — 2.5 — 3

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 71.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Level Ground Height 2m Lift JIBLP
Locked Road

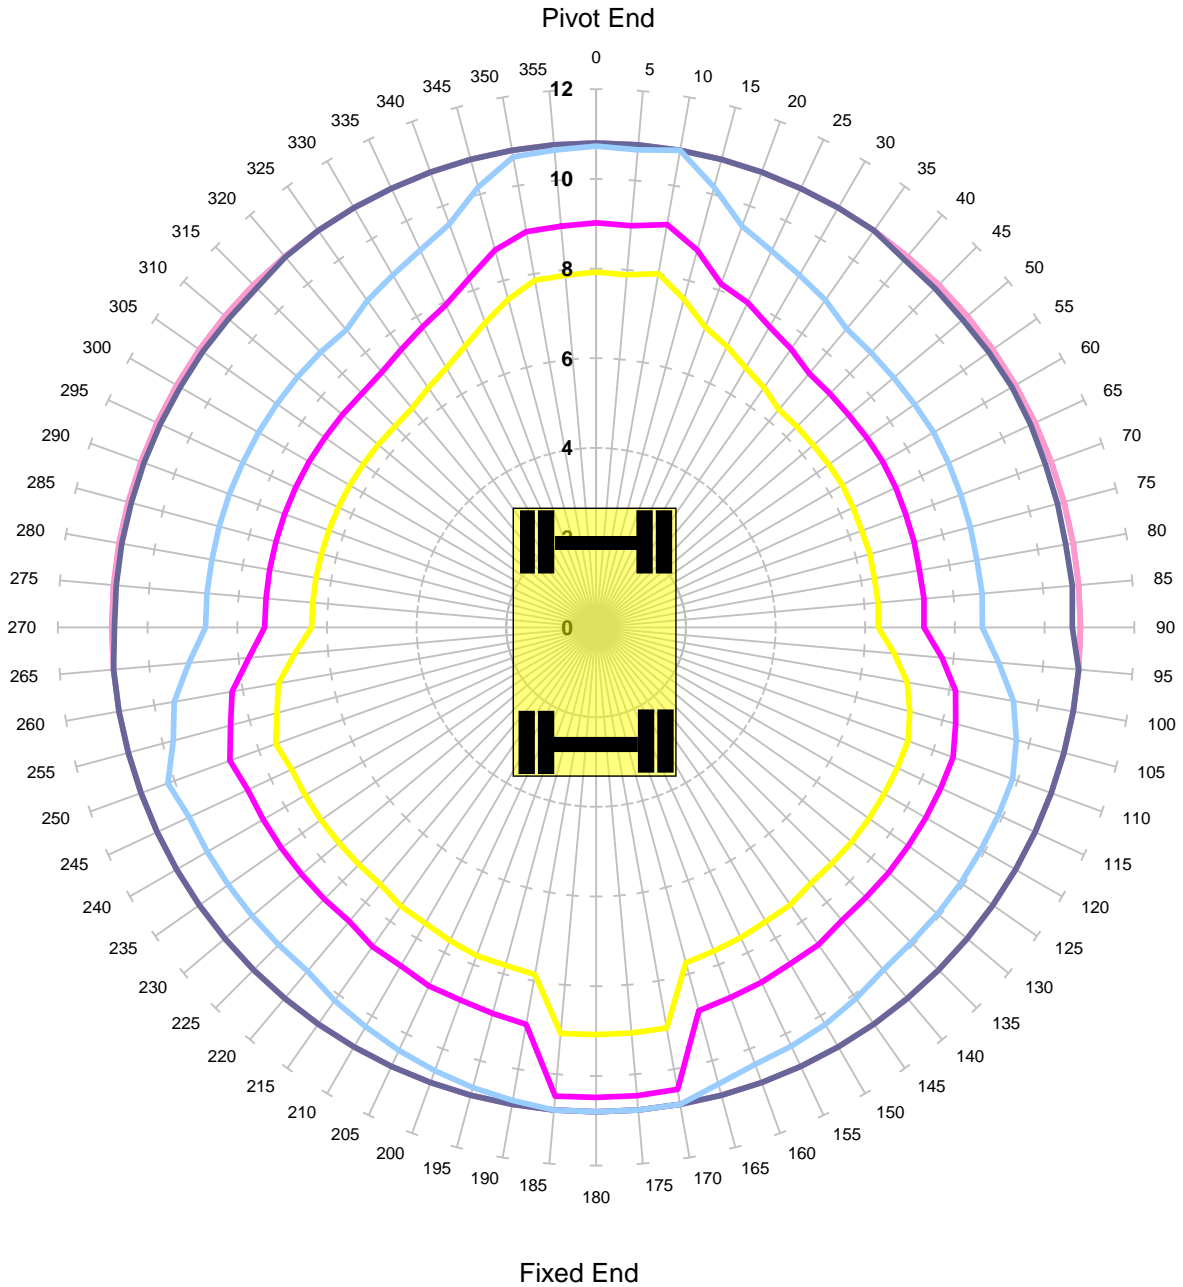


Units in Tonnes

— 0.5 — 1 — 1.5 — 2 — 2.5 — 3

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 71.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Gradient 1 in -25 Height 2m Lift JIBLP
Unlocked Rail Cant -150mm - Tandem Lift

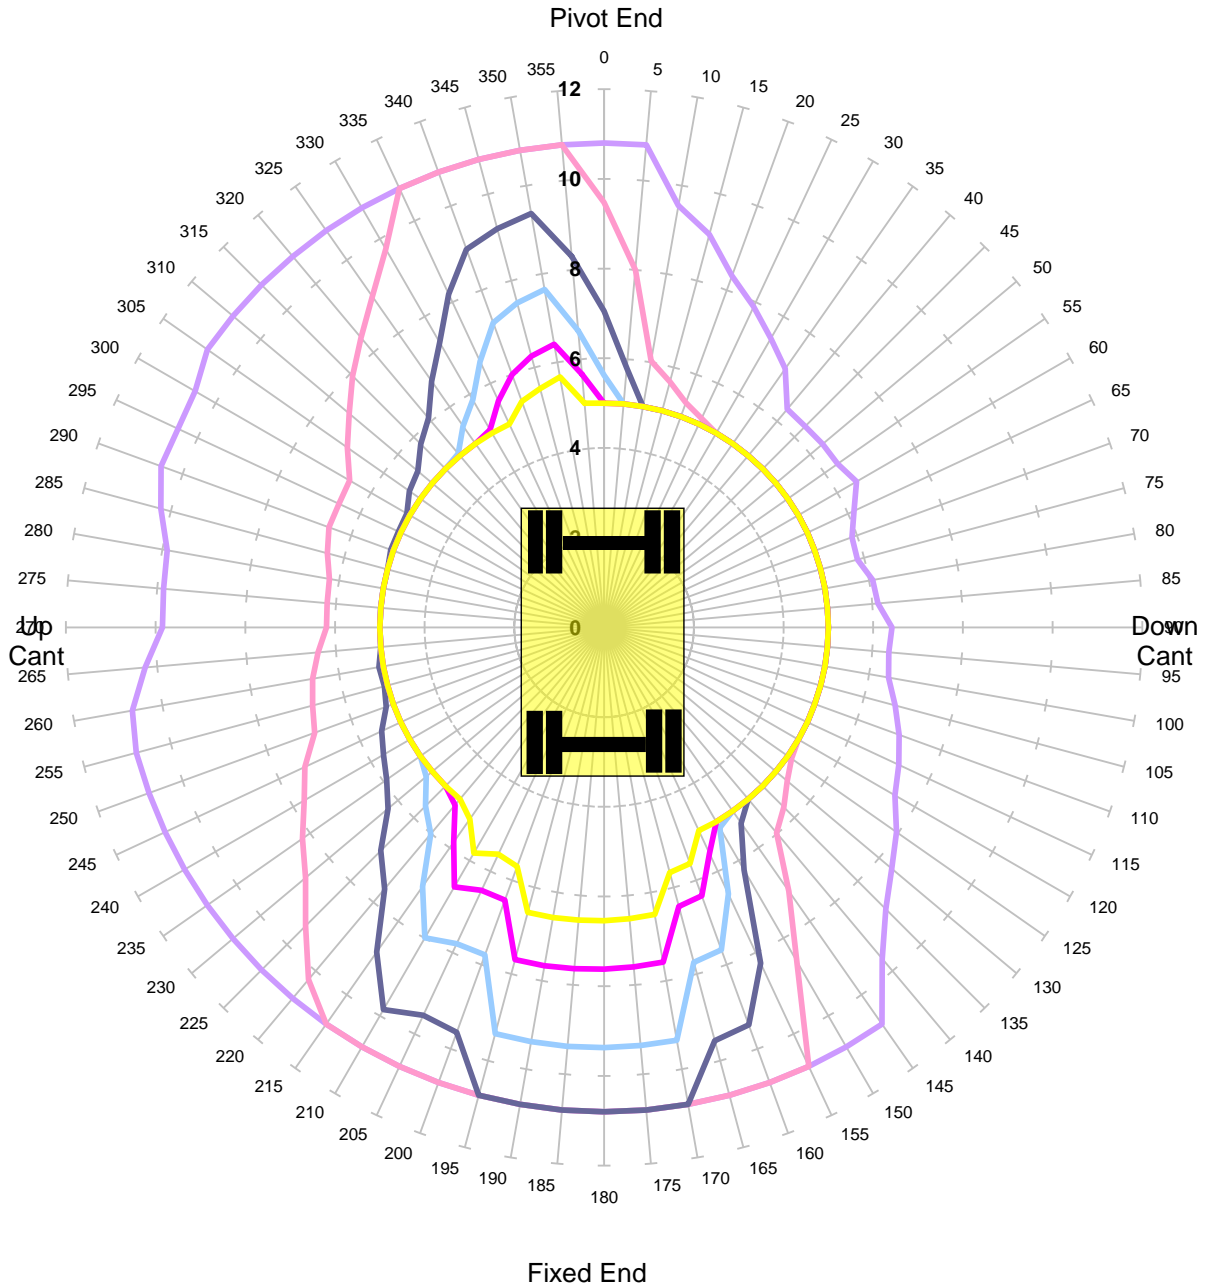


Units in Tonnes

— 0.5 — 1 — 1.5 — 2 — 2.5 — 3

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 44.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Gradient 1 in -25 Height 2m Lift JIBLP
Unlocked Rail Cant -50mm - Tandem Lift

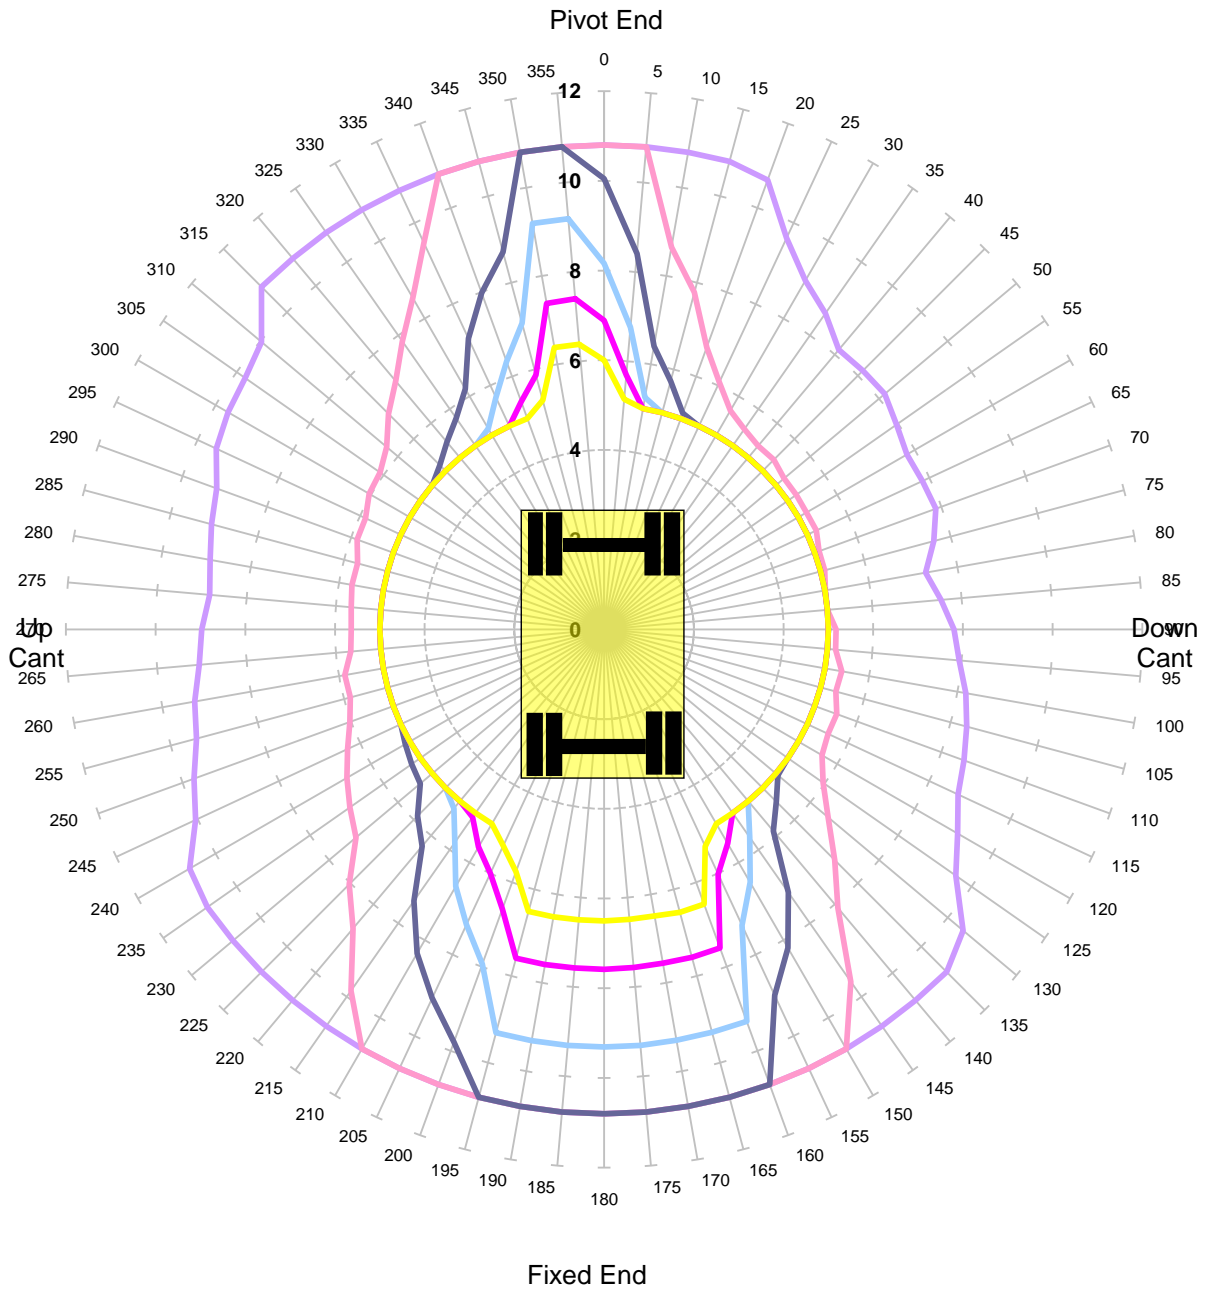


Units in Tonnes

— 0.5 — 1 — 1.5 — 2 — 2.5 — 3

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 44.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Gradient 1 in -25 Height 2m Lift JIBLP
Unlocked Rail Cant 50mm - Tandem Lift

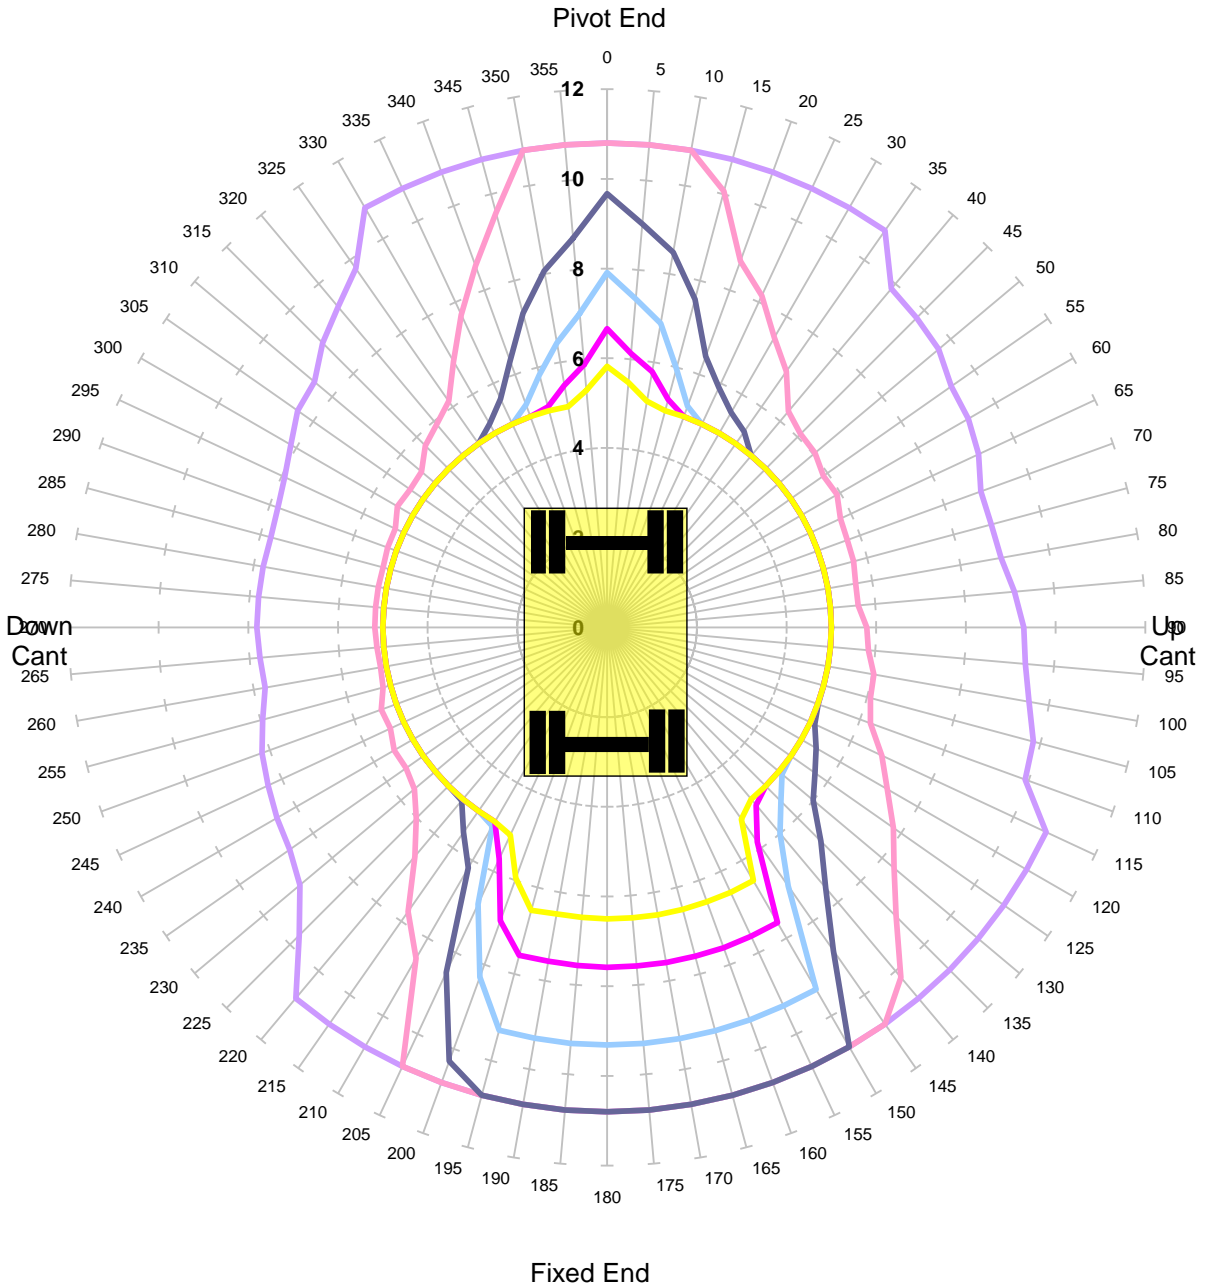


Units in Tonnes

— 0.5 — 1 — 1.5 — 2 — 2.5 — 3

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 44.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Gradient 1 in -25 Height 2m Lift JIBLP
Unlocked Rail Cant 150mm - Tandem Lift

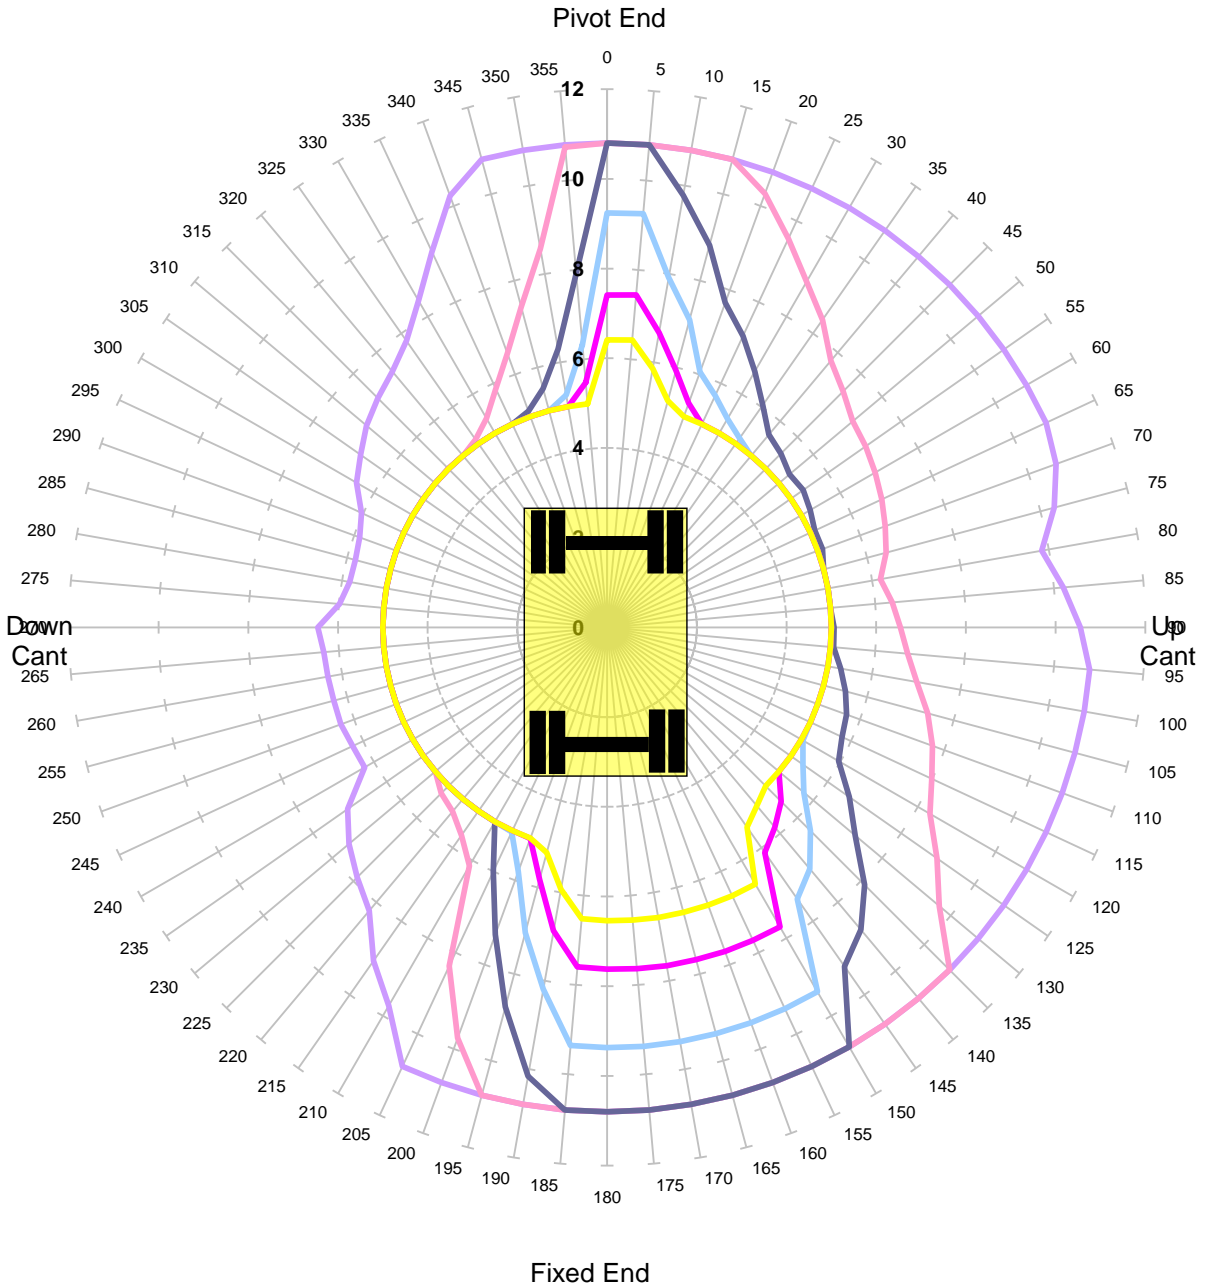


Units in Tonnes

— 0.5 — 1 — 1.5 — 2 — 2.5 — 3


| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 44.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Gradient 1 in -25 Height 2m Lift JIBLP
Locked Rail Cant -150mm - Tandem Lift

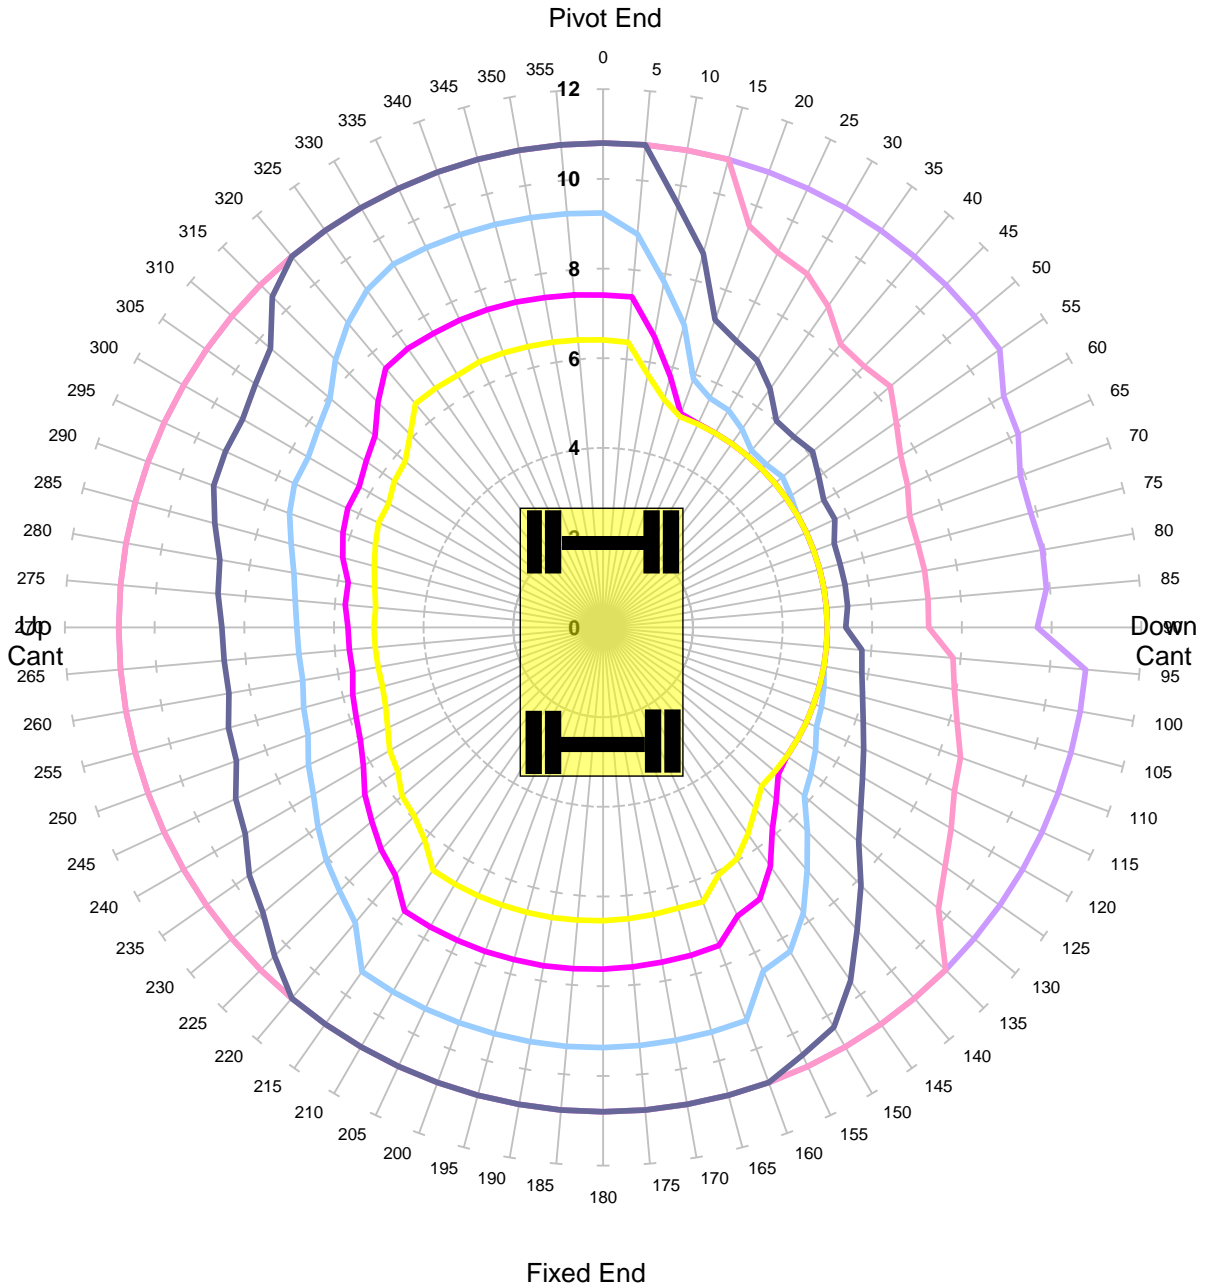

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 59.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Gradient 1 in -25 Height 2m Lift JIBLP
Locked Rail Cant -50mm - Tandem Lift

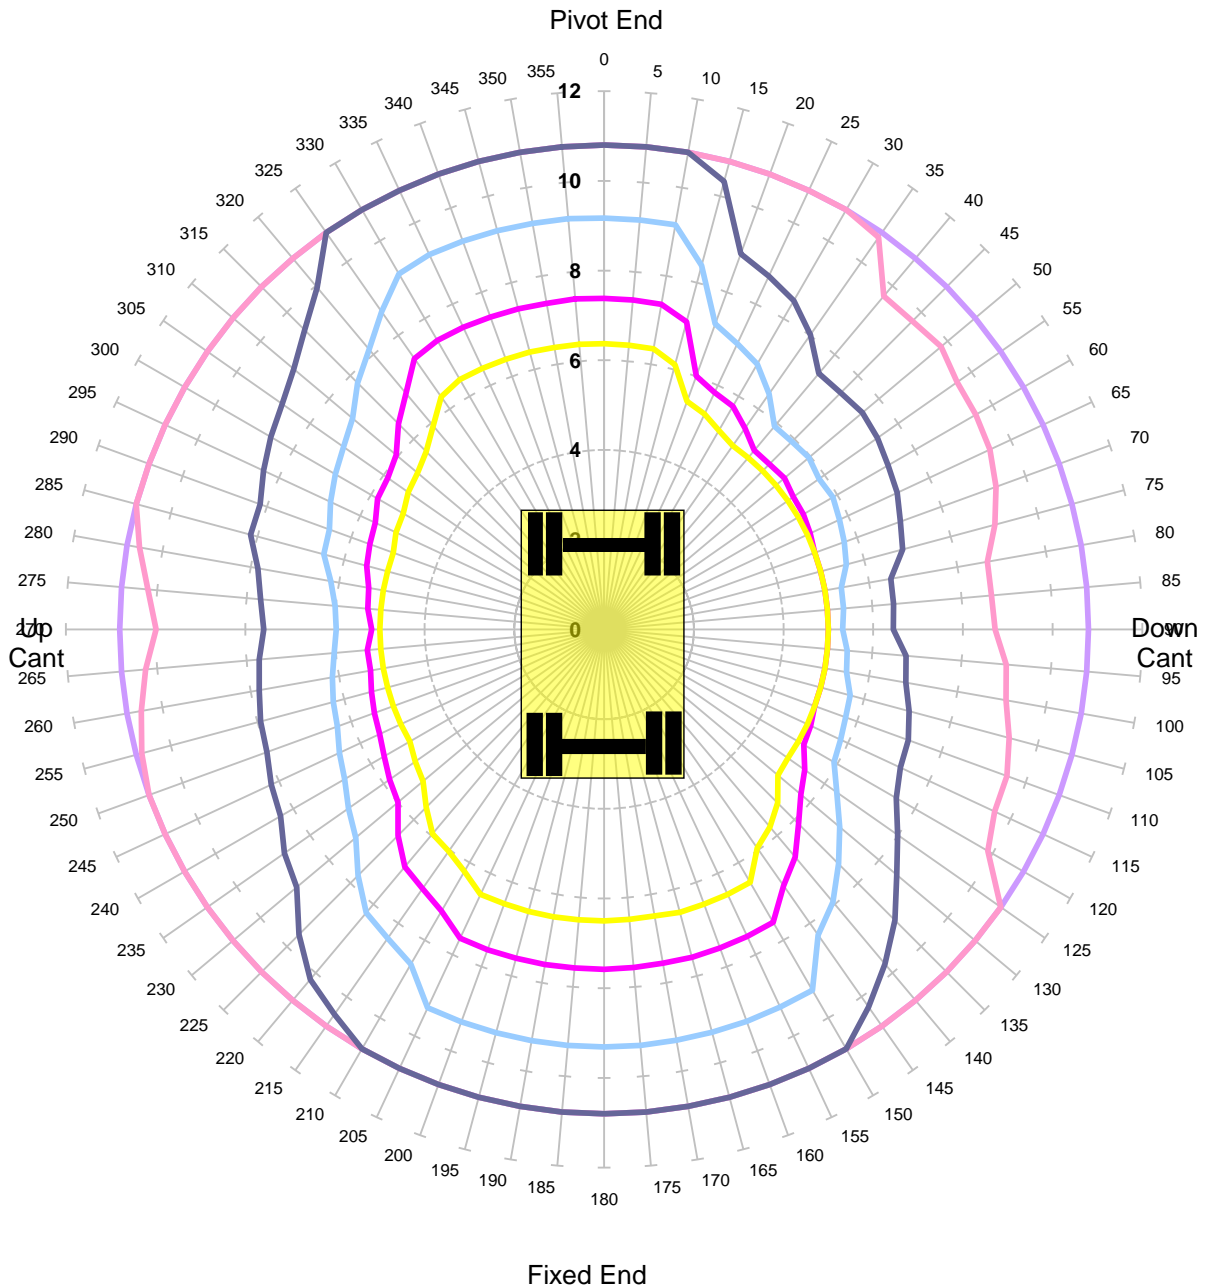


Units in Tonnes

— 0.5 — 1 — 1.5 — 2 — 2.5 — 3

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 59.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Gradient 1 in -25 Height 2m Lift JIBLP
Locked Rail Cant 50mm - Tandem Lift

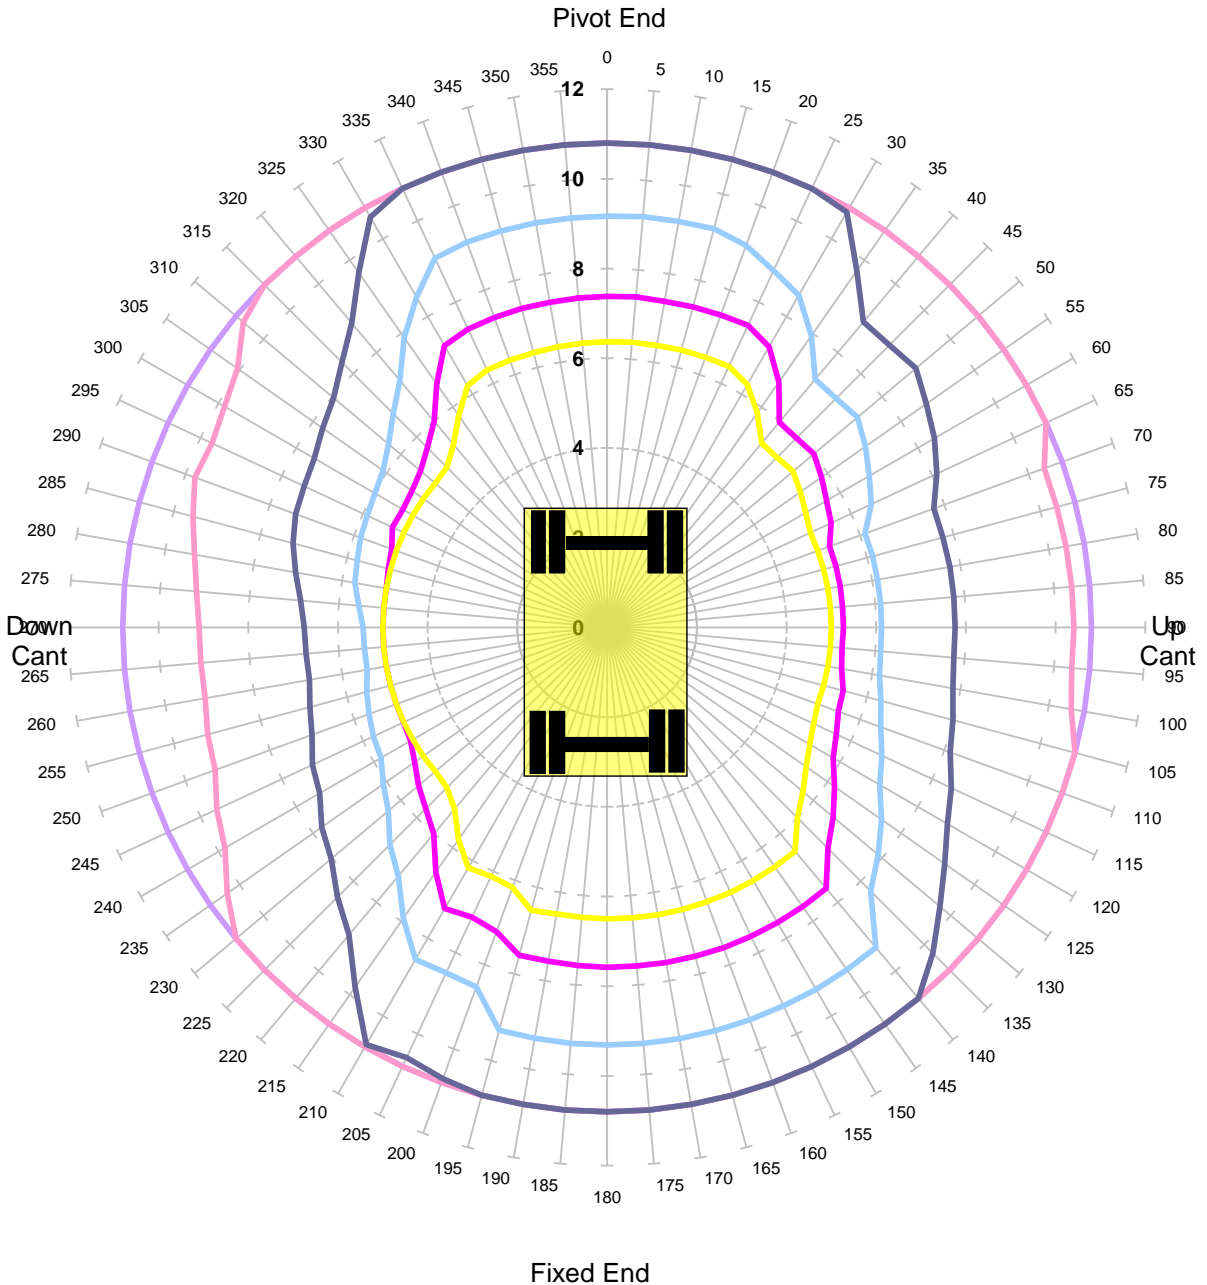


Units in Tonnes

- 0.5
- 1
- 1.5
- 2
- 2.5
- 3


| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 59.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Gradient 1 in -25 Height 2m Lift JIBLP
Locked Rail Cant 150mm - Tandem Lift

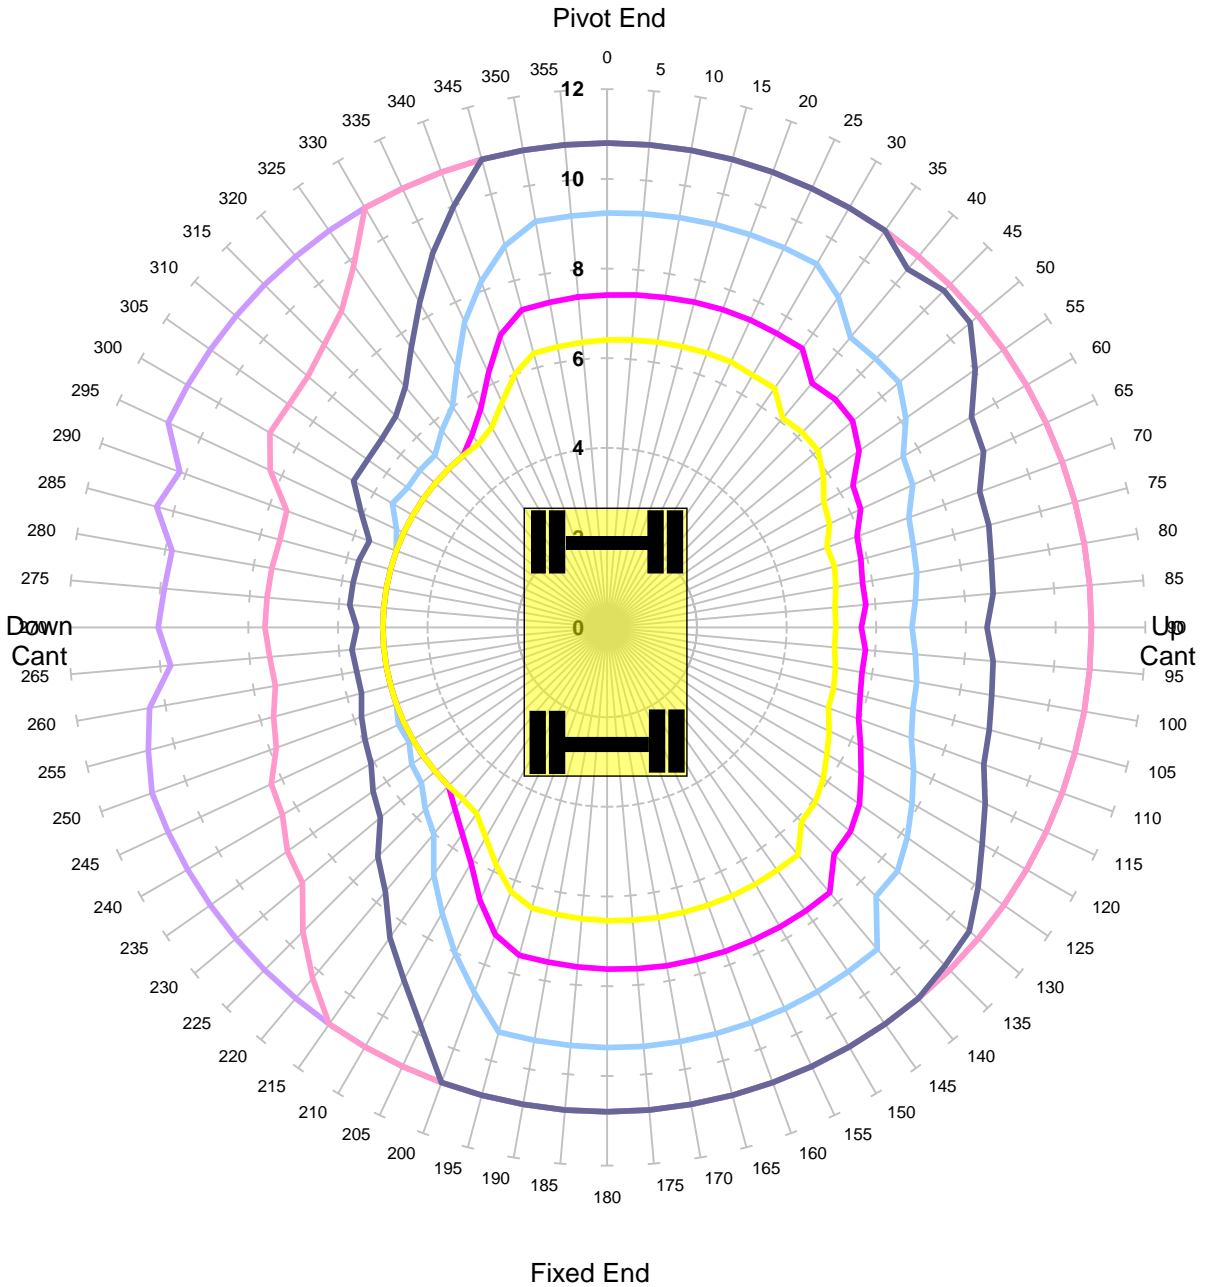

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 59.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Level Ground Height 2m Lift JIBLP
Unlocked Road - Tandem Lift

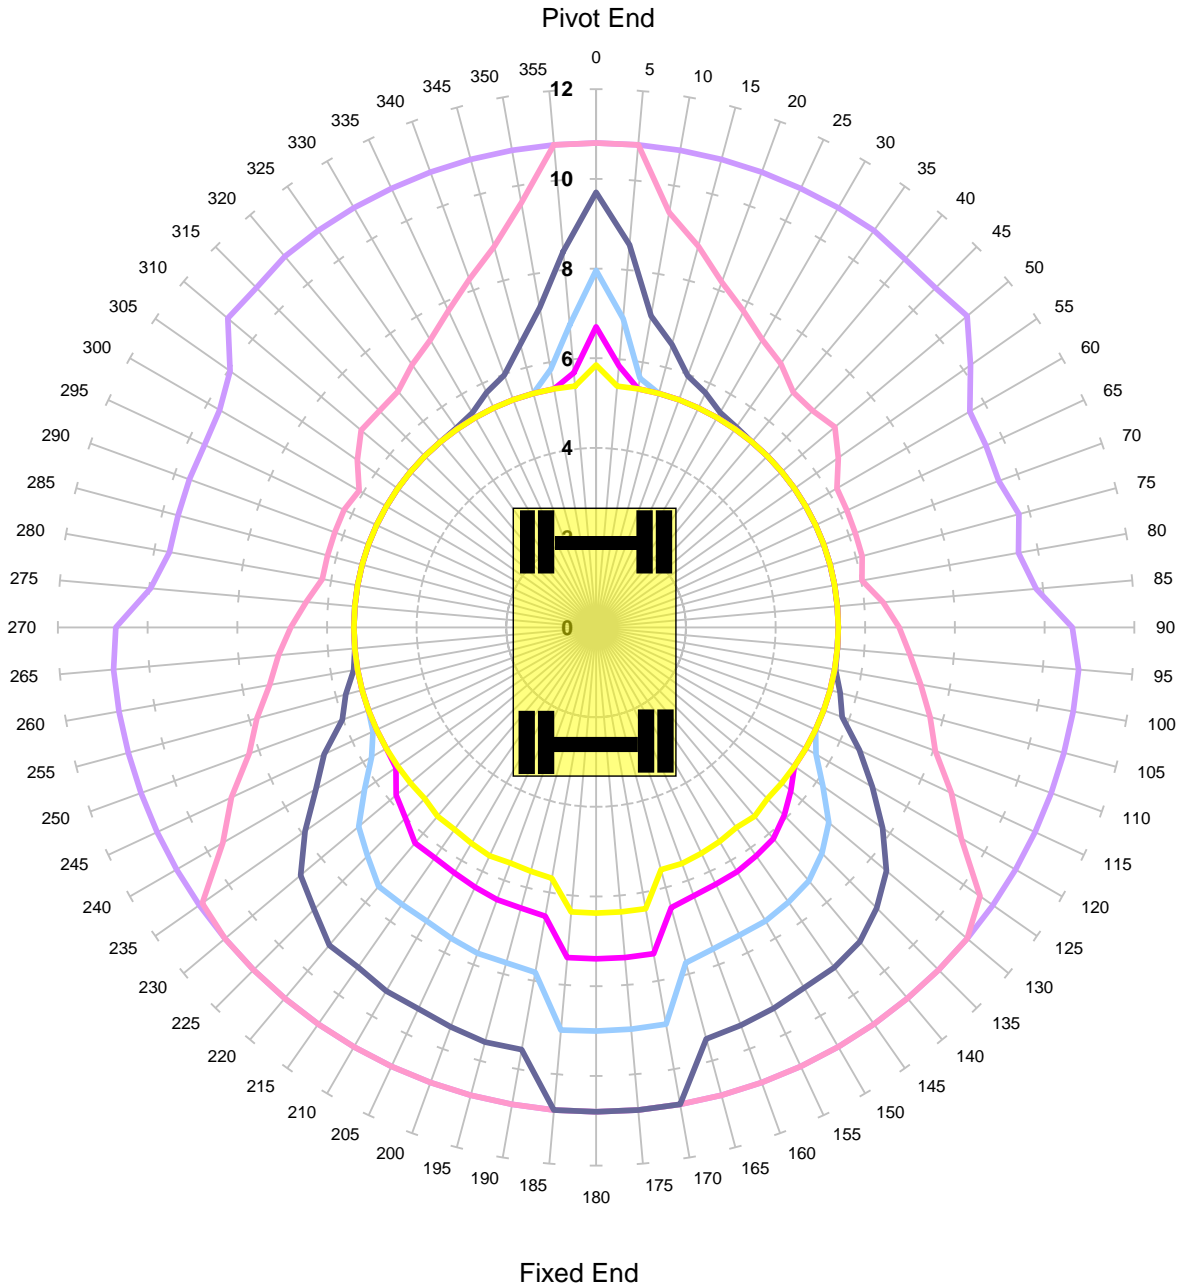


Units in Tonnes

- 0.5
- 1
- 1.5
- 2
- 2.5
- 3

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 47.0% |
| COMMENT: | | | |

Komatsu PW160-11
Max Capacity Contours of Radius(m) Plots 2.5m Dipper 3.0m Jib
Level Ground Height 2m Lift JIBLP
Locked Road - Tandem Lift

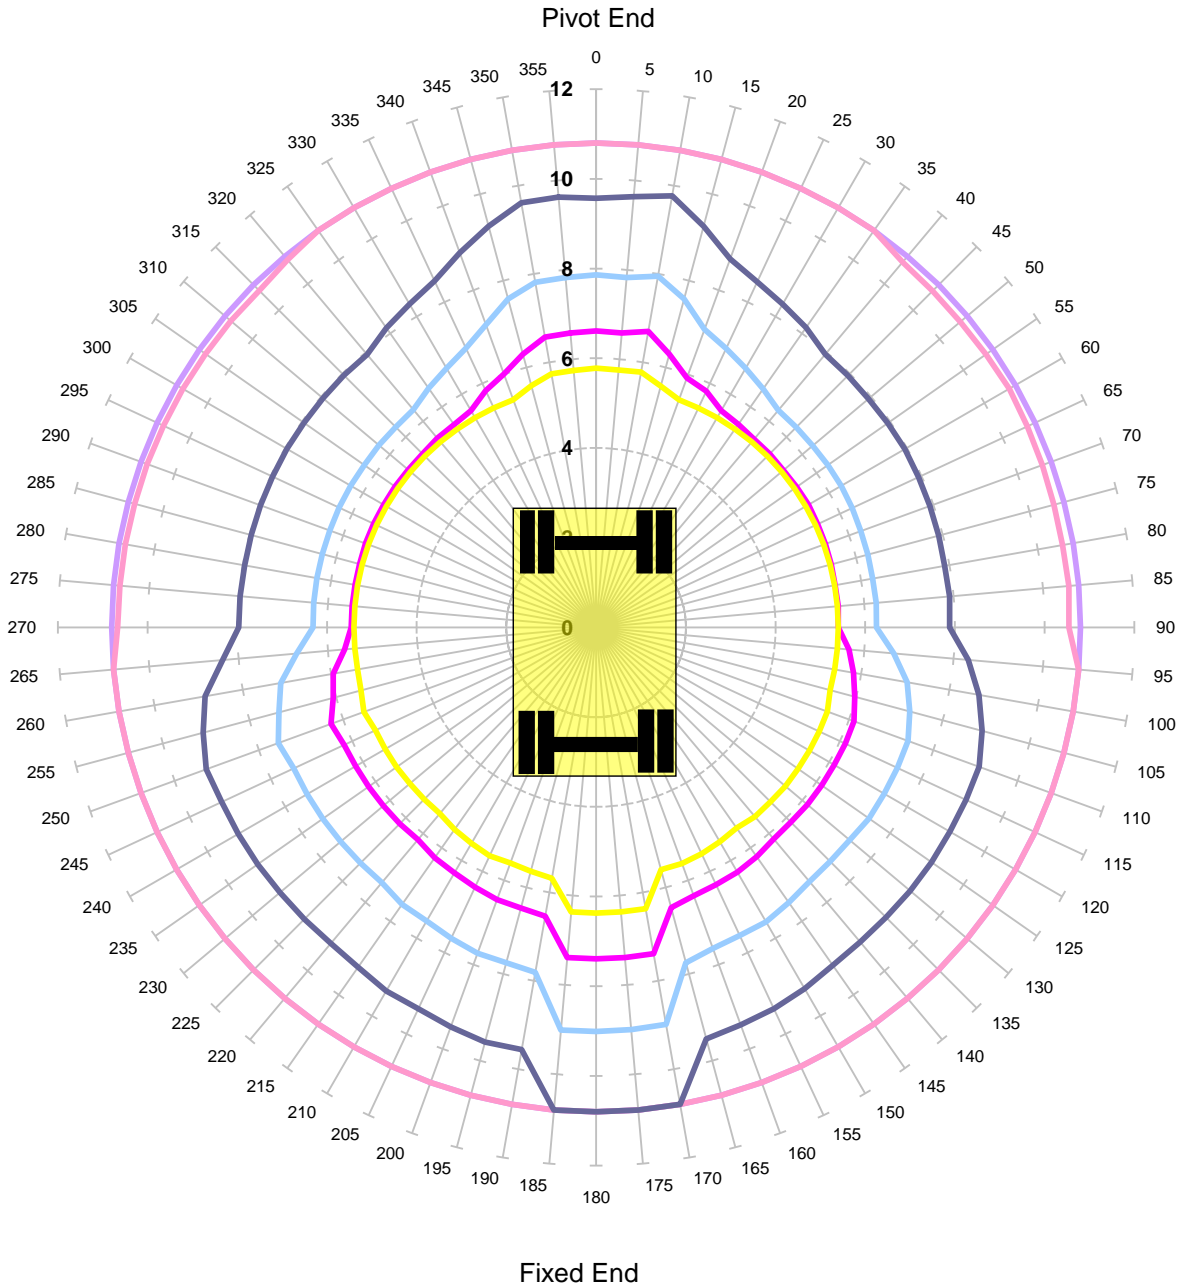

Units in Tonnes

— 0.5 — 1 — 1.5 — 2 — 2.5 — 3

| | | | |
|-----------------------------|-----------------------|-----------------------|-------------|
| MACHINE & MODEL: | Komatsu PW160-11 | REFERENCE: | 3.00m Jib |
| SERIAL No: | H65387 | DATE OF CHART: | 15-Feb-2022 |
| EQUIPMENT: | 2.00m + 3.47m + 2.50m | SAFETY FACTOR: | 47.0% |
| COMMENT: | | | |