

ROADRAILER

by REXQUOTE

e-mail: sales@rexquote.co.uk




Web: www.rexquote.co.uk

TEL:01823 433398

Oscillating Axle

Oscillating Axle

Oscillating Axle

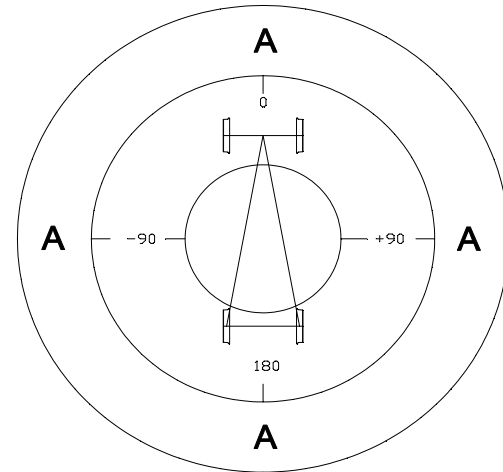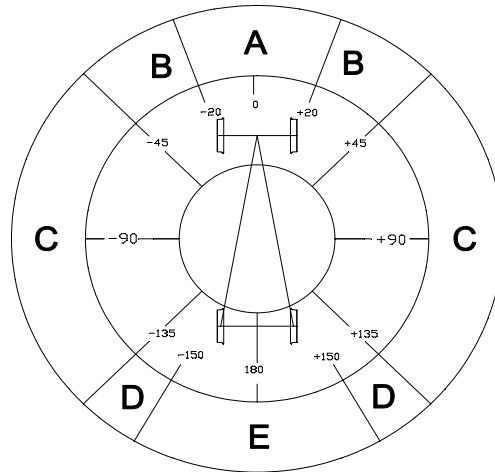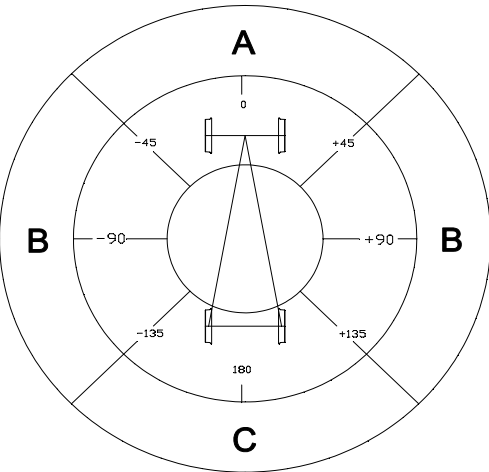

Fixed Axle

Fixed Axle

Fixed Axle

Road Duties

Rail Duties

Rail Duties

Level Rail 0-50 mm
Canted Rail 50-150mm

Maximum Cant + Twist
150 + 25 mm

Machine fitted with permanently attached Quick Hitch

Machine Type:	_____	New Holland MH2.6
Serial Number:	_____	ZEF089WTN5LM00902
Rail Axle Number:	_____	2083
Network Rail Number:	_____	99709 940451-6
Equipment:	_____	Boom 1.75m Artic 2.0m Arm 2.2m
Date:	_____	26th June 2013
Issue:	_____	1
Software Version:	_____	V2.17.13.00

This machine is equipped with a Rexquote Rated Capacity Indicator. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530-PLT Issue 4


Radius / Height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the lifting point with no other equipment attached. This machine is fitted with an hydraulically adjustable boom. This allows the machine to reach the same point in space with a variety of different equipment angles, each combination has a different safe working load. The charts above show both the upper & lower limits of the loads achievable. Loads marked 'b' boom, 'r' articulation, and 'a' arm are limited by hydraulic capacity.

All rail duties listed are valid for use on up to a 1:25 gradient, and with a maximum track twist of 25mm.

RATED LIFT CAPACITY CHART

RIS 1530


Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
1aU	ROAD	+/- 45° Over Osc End		71%

RADIUS


	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	
MINIMUM LOADS	8.0	-	-	-	-	-	-	-	-	-	-	
	7.0	-	-	-	1.26	1.02	-	-	-	-	-	
	6.0	-	-	-	-	-	0.90	0.75	0.62	-	-	
	5.0	-	-	-	-	-	0.90	0.76	0.64	0.54	0.45	
	4.0	-	-	-	-	1.05	0.87	0.73	0.62	0.53	0.45	0.39
	3.0	-	-	-	1.20	0.95	0.80	0.68	0.58	0.50	0.43	0.38
	2.0	-	-	1.33	1.04	0.84	0.70	0.61	0.53	0.47	0.41	0.36
	1.0	1.82	1.40	1.09	0.89	0.74	0.63	0.56	0.49	0.44	0.39	0.34
	0.0	1.88	1.38	1.06	0.85	0.71	0.61	0.53	0.47	0.42	0.37	0.33
	-1.0	1.89	1.38	1.07	0.86	0.72	0.61	0.53	0.46	0.41	0.37	0.33
	-2.0	1.90	1.41	1.10	0.89	0.74	0.63	0.54	0.48	0.42	0.39	-
	-3.0	-	1.47	1.16	0.94	0.78	0.66	0.58	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-



Duty	Config	Sector	Osc Axle	Safety
1aU	ROAD	+/- 45° Over Osc End		71%

RADIUS

	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	
MAXIMUM LOADS	8.0	-	-	-	-	-	-	-	-	-	-	
	7.0	-	-	-	1.26	1.02	-	-	-	-	-	
	6.0	-	-	-	-	-	0.91	0.77	0.63	-	-	
	5.0	-	-	-	-	-	0.91	0.78	0.67	0.56	0.46	
	4.0	-	-	-	-	1.05	0.89	0.77	0.66	0.58	0.48	0.39
	3.0	-	-	-	1.20	1.01	0.86	0.75	0.65	0.57	0.48	0.40
	2.0	-	-	1.37	1.14	0.97	0.83	0.73	0.64	0.55	0.46	0.38
	1.0	1.94	1.49	1.28	1.09	0.94	0.81	0.69	0.60	0.52	0.43	0.36
	0.0	1.95	1.44	1.17	0.99	0.84	0.73	0.64	0.56	0.48	0.40	0.35
	-1.0	1.91	1.43	1.14	0.94	0.80	0.69	0.60	0.51	0.44	0.38	0.34
	-2.0	1.93	1.45	1.15	0.94	0.79	0.67	0.57	0.49	0.43	0.39	-
	-3.0	-	1.49	1.17	0.95	0.79	0.67	0.58	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-




NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 't' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	2 of 29

RATED LIFT CAPACITY CHART

RIS 1530


Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
1aL	ROAD	+/- 45° Over Osc End		71%

RADIUS

	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
MINIMUM LOADS	8.0	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	2.38r	1.89a	-	-	-	-	-
	6.0	-	-	-	-	-	1.66	1.37	1.15	-	-
	5.0	-	-	-	-	-	1.66r	1.38	1.17	0.99	0.85
	4.0	-	-	-	-	1.71a	1.63	1.35	1.15	0.98	0.85
	3.0	-	-	-	-	2.42	1.87	1.53	1.29	1.10	0.95
	2.0	-	-	-	2.98	2.20	1.73	1.41	1.21	1.04	0.91
	1.0	2.79b	3.57a	2.61	2.00	1.60	1.32	1.14	0.99	0.87	0.77
	0.0	4.70a	3.62a	2.56	1.93	1.55	1.29	1.11	0.96	0.85	0.75
	-1.0	5.00	3.71	2.58	1.95	1.56	1.29	1.10	0.96	0.84	0.75
	-2.0	5.00	3.77	2.62	1.99	1.59	1.32	1.12	0.97	0.86	0.77
	-3.0	-	3.85	2.71	2.05	1.64	1.36	1.16b	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	



Duty	Config	Sector	Osc Axle	Safety
1aL	ROAD	+/- 45° Over Osc End		71%

RADIUS

	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
MAXIMUM LOADS	8.0	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	2.38r	1.96	-	-	-	-	-
	6.0	-	-	-	-	-	1.67	1.40	1.16	-	-
	5.0	-	-	-	-	-	1.68	1.41	1.21	1.02	0.86
	4.0	-	-	-	-	1.77a	1.66	1.40	1.20	1.04	0.88
	3.0	-	-	-	-	2.43	1.95	1.62	1.37	1.19	1.04
	2.0	-	-	-	3.04	2.34	1.90	1.58	1.35	1.17	1.01
	1.0	5.00	3.89	2.89	2.28	1.85	1.54	1.31	1.12	0.97	0.83
	0.0	5.00	3.81	2.73	2.13	1.73	1.45	1.23	1.07	0.92	0.79
	-1.0	5.00	3.79	2.68	2.07	1.67	1.40	1.19	1.02	0.88	0.77
	-2.0	5.00	3.83	2.70	2.06	1.66	1.37	1.15	0.99	0.86	0.77
	-3.0	-	3.90	2.73	2.07	1.66	1.37	1.16b	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	




NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	3 of 29

RATED LIFT CAPACITY CHART


RIS 1530


Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
1bU	ROAD	+/- 45° - +/- 135°		71%

RADIUS


	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
MINIMUM LOADS	8.0	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	1.26	1.02	-	-	-	-	-
	6.0	-	-	-	-	-	0.90	0.75	0.62	-	-
	5.0	-	-	-	-	-	0.90	0.76	0.64	0.54	0.45
	4.0	-	-	-	-	1.05	0.87	0.73	0.62	0.53	0.45
	3.0	-	-	-	1.20	0.95	0.80	0.68	0.58	0.50	0.43
	2.0	-	-	1.33	1.04	0.84	0.70	0.61	0.53	0.47	0.41
	1.0	1.82	1.40	1.09	0.89	0.74	0.63	0.56	0.49	0.44	0.39
	0.0	1.88	1.38	1.06	0.85	0.71	0.61	0.53	0.47	0.42	0.37
	-1.0	1.89	1.38	1.07	0.86	0.72	0.61	0.53	0.46	0.41	0.37
	-2.0	1.90	1.41	1.10	0.89	0.74	0.63	0.54	0.48	0.42	0.39
	-3.0	-	1.47	1.16	0.93	0.78	0.66	0.58	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-



Duty	Config	Sector	Osc Axle	Safety
1bU	ROAD	+/- 45° - +/- 135°		71%

RADIUS

	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
MAXIMUM LOADS	8.0	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	1.26	1.02	-	-	-	-	-
	6.0	-	-	-	-	-	0.91	0.77	0.63	-	-
	5.0	-	-	-	-	-	0.91	0.78	0.67	0.56	0.46
	4.0	-	-	-	-	1.05	0.89	0.77	0.66	0.58	0.48
	3.0	-	-	-	1.20	1.01	0.86	0.75	0.65	0.57	0.48
	2.0	-	-	1.37	1.14	0.97	0.83	0.73	0.64	0.55	0.46
	1.0	1.94	1.49	1.28	1.09	0.94	0.81	0.69	0.60	0.52	0.43
	0.0	1.95	1.44	1.17	0.99	0.84	0.73	0.64	0.56	0.48	0.40
	-1.0	1.91	1.43	1.14	0.94	0.80	0.69	0.60	0.51	0.44	0.38
	-2.0	1.93	1.45	1.15	0.94	0.79	0.67	0.57	0.49	0.43	0.39
	-3.0	-	1.49	1.17	0.95	0.79	0.67	0.58	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-




NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 't' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	4 of 29

RATED LIFT CAPACITY CHART


RIS 1530


Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
1bL	ROAD	+/- 45° - +/- 135°		71%

RADIUS


	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	
MINIMUM LOADS	8.0	-	-	-	-	-	-	-	-	-	-	
	7.0	-	-	-	2.38r	1.89a	-	-	-	-	-	
	6.0	-	-	-	-	-	1.66	1.37	1.15	-	-	
	5.0	-	-	-	-	-	1.66r	1.38	1.17	0.99	0.85	
	4.0	-	-	-	-	1.71a	1.63	1.35	1.15	0.98	0.85	0.74
	3.0	-	-	-	2.42	1.87	1.53	1.29	1.10	0.95	0.83	0.73
	2.0	-	-	2.98	2.20	1.73	1.41	1.21	1.04	0.91	0.80	0.70
	1.0	2.79b	3.57a	2.61	2.00	1.60	1.32	1.14	0.99	0.87	0.77	0.69
	0.0	4.70a	3.62a	2.56	1.93	1.55	1.29	1.11	0.96	0.85	0.75	0.67
	-1.0	5.00	3.71	2.58	1.95	1.56	1.29	1.10	0.96	0.84	0.75	0.68
	-2.0	5.00	3.77	2.62	1.99	1.59	1.32	1.12	0.97	0.86	0.77	-
	-3.0	-	3.85	2.71	2.05	1.64	1.36	1.16b	-	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	-	



Duty	Config	Sector	Osc Axle	Safety
1bL	ROAD	+/- 45° - +/- 135°		71%

RADIUS

	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	
MAXIMUM LOADS	8.0	-	-	-	-	-	-	-	-	-	-	
	7.0	-	-	-	2.38r	1.96	-	-	-	-	-	
	6.0	-	-	-	-	-	1.67	1.40	1.16	-	-	
	5.0	-	-	-	-	-	1.68	1.41	1.21	1.02	0.86	
	4.0	-	-	-	-	1.77a	1.66	1.40	1.20	1.04	0.88	0.75
	3.0	-	-	-	2.43	1.95	1.62	1.37	1.19	1.04	0.88	0.75
	2.0	-	-	3.04	2.34	1.90	1.58	1.35	1.17	1.01	0.86	0.74
	1.0	5.00	3.89	2.89	2.28	1.85	1.54	1.31	1.12	0.97	0.83	0.71
	0.0	5.00	3.81	2.73	2.13	1.73	1.45	1.23	1.07	0.92	0.79	0.69
	-1.0	5.00	3.79	2.68	2.07	1.67	1.40	1.19	1.02	0.88	0.77	0.68
	-2.0	5.00	3.83	2.70	2.06	1.66	1.37	1.15	0.99	0.86	0.77	-
	-3.0	-	3.90	2.73	2.07	1.66	1.37	1.16b	-	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	-	




NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	5 of 29

RATED LIFT CAPACITY CHART

RIS 1530


Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
1cU	ROAD	+/- 45° Over Fixed End		71%

RADIUS

	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
MINIMUM LOADS	8.0	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	2.38r	1.89a	-	-	-	-	-
	6.0	-	-	-	-	-	1.70r	1.50b	1.42r	-	-
	5.0	-	-	-	-	-	1.66r	1.48r	1.27b	1.24r	1.16r
	4.0	-	-	-	-	1.71a	1.74r	1.49b	1.26b	1.13b	1.16r
	3.0	-	-	-	2.47a	2.14	1.75b	1.46b	1.24b	1.10b	1.17r
	2.0	-	-	2.90	2.40	2.04	1.70b	1.42b	1.18r	1.07r	1.15
	1.0	2.79b	3.29	2.68	2.26	1.93r	1.61r	1.43r	1.28r	1.22r	1.13
	0.0	4.22	3.27	2.65	2.22	1.91	1.68	1.49	1.34	1.22	1.11
	-1.0	4.22	3.27	2.66	2.23	1.91	1.68	1.49	1.34	1.21	1.11
	-2.0	4.23	3.30	2.68	2.08b	1.70b	1.67b	1.50	1.35	1.15b	0.81b
	-3.0	-	3.35	2.74	2.17b	1.69b	1.37b	1.16b	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	



Duty	Config	Sector	Osc Axle	Safety
1cU	ROAD	+/- 45° Over Fixed End		71%

RADIUS

	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
MAXIMUM LOADS	8.0	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	2.38r	2.04a	-	-	-	-	-
	6.0	-	-	-	-	-	1.87r	1.71	1.50	-	-
	5.0	-	-	-	-	-	1.82r	1.70r	1.52	1.36	1.20
	4.0	-	-	-	-	1.77a	1.94	1.71	1.52b	1.36b	1.22
	3.0	-	-	-	2.48a	2.19	1.91	1.68	1.50	1.35	1.22
	2.0	-	-	2.94	2.49	2.15	1.88	1.66	1.49	1.33	1.20
	1.0	4.27	3.37	2.85	2.45	2.11	1.84	1.63	1.46	1.31	1.17
	0.0	4.28	3.33	2.75	2.34	2.04	1.79	1.59	1.43	1.28	1.14
	-1.0	4.24	3.32	2.72	2.31	2.00	1.75	1.56	1.39	1.24	1.12
	-2.0	4.26	3.34	2.73	2.30	1.98	1.73	1.53	1.37	1.23	0.86b
	-3.0	-	3.37	2.75	2.31	1.98	1.74	1.16b	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	




NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	6 of 29

RATED LIFT CAPACITY CHART

RIS 1530


Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
1cL	ROAD	+/- 45° Over Fixed End		71%

RADIUS

	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
MINIMUM LOADS	8.0	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	2.38r	1.89a	-	-	-	-	-
	6.0	-	-	-	-	-	1.70r	1.50b	1.42r	-	-
	5.0	-	-	-	-	-	1.66r	1.48r	1.27b	1.24r	1.16r
	4.0	-	-	-	-	1.71a	1.74r	1.49b	1.26b	1.13b	1.16r
	3.0	-	-	-	2.47a	2.14	1.75b	1.46b	1.24b	1.10b	1.17r
	2.0	-	-	2.90	2.40	2.04	1.70b	1.42b	1.18r	1.07r	1.15
	1.0	2.79b	3.29	2.68	2.26	1.93r	1.61r	1.43r	1.28r	1.22r	1.13
	0.0	4.22	3.27	2.65	2.22	1.91	1.68	1.49	1.34	1.22	1.11
	-1.0	4.22	3.27	2.66	2.23	1.91	1.68	1.49	1.34	1.21	1.11
	-2.0	4.23	3.30	2.68	2.08b	1.70b	1.67b	1.50	1.35	1.15b	0.81b
	-3.0	-	3.35	2.74	2.17b	1.69b	1.37b	1.16b	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	



Duty	Config	Sector	Osc Axle	Safety
1cL	ROAD	+/- 45° Over Fixed End		71%

RADIUS

	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
MAXIMUM LOADS	8.0	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	2.38r	2.04a	-	-	-	-	-
	6.0	-	-	-	-	-	1.87r	1.71	1.50	-	-
	5.0	-	-	-	-	-	1.82r	1.70r	1.52	1.36	1.20
	4.0	-	-	-	-	1.77a	1.94	1.71	1.52b	1.36b	1.22
	3.0	-	-	-	2.48a	2.19	1.91	1.68	1.50	1.35	1.22
	2.0	-	-	2.94	2.49	2.15	1.88	1.66	1.49	1.33	1.20
	1.0	4.27	3.37	2.85	2.45	2.11	1.84	1.63	1.46	1.31	1.17
	0.0	4.28	3.33	2.75	2.34	2.04	1.79	1.59	1.43	1.28	1.14
	-1.0	4.24	3.32	2.72	2.31	2.00	1.75	1.56	1.39	1.24	1.12
	-2.0	4.26	3.34	2.73	2.30	1.98	1.73	1.53	1.37	1.23	0.86b
	-3.0	-	3.37	2.75	2.31	1.98	1.74	1.16b	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	7 of 29

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
2aU	RAIL	+/- 20° Over Osc End		67%
				
	0 - 50mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.45	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.24	1.03	0.87	-	-	-
	5.0	-	-	-	-	-	1.24	1.04	0.88	0.75	0.65	-
	4.0	-	-	-	-	1.44	1.19	1.01	0.86	0.74	0.64	0.53
	3.0	-	-	-	1.69	1.34	1.11	0.95	0.82	0.71	0.62	0.51
	2.0	-	2.66	1.94	1.51	1.22	1.01	0.88	0.76	0.67	0.58	0.48
	1.0	3.36	2.29	1.71	1.36	1.12	0.94	0.82	0.72	0.64	0.55	0.46
	0.0	3.36	2.28	1.69	1.32	1.09	0.92	0.80	0.70	0.62	0.53	0.45
	-1.0	3.37	2.29	1.70	1.34	1.10	0.93	0.80	0.70	0.62	0.53	0.45
	-2.0	3.35	2.33	1.74	1.37	1.13	0.95	0.82	0.72	0.64	-	-
	-3.0	-	-	1.82	1.44	1.18	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-



Duty	Config	Sector	Osc Axle	Safety
2aU	RAIL	+/- 20° Over Osc End		67%
				
	0 - 50mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.46	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.25	1.06	0.89	-	-	-
	5.0	-	-	-	-	-	1.25	1.06	0.91	0.78	0.65	-
	4.0	-	-	-	-	1.46	1.22	1.05	0.91	0.79	0.67	0.55
	3.0	-	-	-	1.70	1.41	1.19	1.02	0.89	0.78	0.67	0.54
	2.0	-	2.68	2.04	1.65	1.37	1.16	1.01	0.88	0.76	0.65	0.53
	1.0	3.44	2.39	1.91	1.57	1.32	1.12	0.96	0.83	0.72	0.62	0.50
	0.0	3.43	2.35	1.81	1.47	1.23	1.05	0.91	0.79	0.68	0.58	0.46
	-1.0	3.40	2.35	1.78	1.43	1.19	1.01	0.87	0.75	0.65	0.55	0.45
	-2.0	3.44	2.38	1.79	1.43	1.17	0.99	0.84	0.73	0.64	-	-
	-3.0	-	-	1.82	1.44	1.18	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	8 of 29

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
2aL	RAIL	+/- 20° Over Osc End		90%
				
	0 - 50mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.95a	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.64	1.31	1.05	-	-	-
	5.0	-	-	-	-	-	1.64	1.32	1.06	0.86	0.69	-
	4.0	-	-	-	-	1.72a	1.57	1.27	1.03	0.84	0.68	0.55
	3.0	-	-	-	2.41	1.82	1.44	1.17	0.96	0.79	0.65	0.53
	2.0	-	4.03	2.86	2.12	1.63	1.28	1.06	0.89	0.74	0.61	0.51
	1.0	3.64b	3.47	2.49	1.87	1.47	1.18	0.98	0.82	0.69	0.58	0.48
	0.0	4.62a	3.44	2.45	1.82	1.42	1.15	0.95	0.79	0.66	0.55	0.46
	-1.0	5.00	3.46	2.48	1.85	1.44	1.15	0.94	0.78	0.66	0.55	0.47
	-2.0	5.00	3.53	2.54	1.90	1.48	1.19	0.97	0.81	0.68	-	-
	-3.0	-	-	2.67	2.00	1.57	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-



Duty	Config	Sector	Osc Axle	Safety
2aL	RAIL	+/- 20° Over Osc End		90%
				
	0 - 50mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	2.01	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.66	1.35	1.07	-	-	-
	5.0	-	-	-	-	-	1.66	1.35	1.12	0.90	0.71	-
	4.0	-	-	-	-	1.83a	1.62	1.33	1.11	0.92	0.73	0.57
	3.0	-	-	-	2.43	1.93	1.57	1.30	1.09	0.91	0.72	0.57
	2.0	-	4.05	3.01	2.34	1.87	1.53	1.27	1.07	0.88	0.70	0.55
	1.0	5.00	3.62	2.80	2.22	1.78	1.46	1.20	0.99	0.82	0.65	0.52
	0.0	5.00	3.55	2.65	2.05	1.65	1.34	1.11	0.92	0.75	0.60	0.48
	-1.0	5.00	3.55	2.61	1.99	1.58	1.28	1.06	0.86	0.70	0.57	0.47
	-2.0	5.00	3.60	2.63	2.00	1.56	1.25	1.01	0.83	0.69	-	-
	-3.0	-	-	2.68	2.02	1.57	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	9 of 29

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
2bU	RAIL	+/- 20° - +/- 45° Over Osc End		67%
				
	0 - 50mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	0.91	-	-	-	-	-	-
	6.0	-	-	-	-	-	0.77	0.61	0.43	-	-	-
	5.0	-	-	-	-	-	0.77	0.61	0.44	0.30	0.18	-
	4.0	-	-	-	-	0.91	0.72	0.57	0.41	0.28	0.18	0.09
	3.0	-	-	-	1.06	0.80	0.63	0.48	0.34	0.23	0.14	0.07
	2.0	-	1.75	1.19	0.87	0.67	0.49	0.36	0.26	0.18	0.10	0.04
	1.0	2.13	1.34	0.93	0.71	0.53	0.38	0.28	0.20	0.13	0.07	0.01
	0.0	2.13	1.32	0.91	0.67	0.49	0.35	0.25	0.17	0.10	0.05	-
	-1.0	2.15	1.33	0.93	0.69	0.51	0.36	0.25	0.16	0.10	0.05	0.01
	-2.0	2.12	1.38	0.97	0.73	0.55	0.39	0.27	0.19	0.12	-	-
	-3.0	-	-	1.06	0.79	0.63	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-



Duty	Config	Sector	Osc Axle	Safety
2bU	RAIL	+/- 20° - +/- 45° Over Osc End		67%
				
	0 - 50mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	0.92	-	-	-	-	-	-
	6.0	-	-	-	-	-	0.78	0.63	0.45	-	-	-
	5.0	-	-	-	-	-	0.78	0.64	0.50	0.34	0.20	-
	4.0	-	-	-	-	0.92	0.75	0.63	0.49	0.36	0.22	0.10
	3.0	-	-	-	1.08	0.87	0.72	0.60	0.47	0.35	0.21	0.10
	2.0	-	1.77	1.30	1.02	0.83	0.69	0.57	0.45	0.32	0.19	0.08
	1.0	2.23	1.45	1.15	0.94	0.77	0.64	0.50	0.37	0.26	0.14	0.05
	0.0	2.22	1.40	1.04	0.83	0.68	0.55	0.41	0.30	0.19	0.09	0.02
	-1.0	2.19	1.39	1.01	0.79	0.63	0.48	0.36	0.24	0.14	0.06	0.01
	-2.0	2.23	1.43	1.03	0.79	0.62	0.45	0.31	0.21	0.13	-	-
	-3.0	-	-	1.06	0.80	0.63	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
	PAGE

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
2bL	RAIL	+/- 20° - +/- 45° Over Osc End		90%
				
	0 - 50mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.19	-	-	-	-	-	-
	6.0	-	-	-	-	-	0.96	0.72	0.53	-	-	-
	5.0	-	-	-	-	-	0.96	0.72	0.54	0.39	0.27	-
	4.0	-	-	-	-	1.18	0.89	0.68	0.51	0.37	0.26	0.17
	3.0	-	-	-	1.43	1.02	0.76	0.59	0.44	0.33	0.23	0.15
	2.0	-	2.48	1.64	1.15	0.83	0.61	0.48	0.37	0.27	0.19	0.12
	1.0	3.03	1.90	1.28	0.92	0.68	0.51	0.40	0.30	0.22	0.15	0.09
	0.0	3.04	1.87	1.24	0.87	0.63	0.48	0.36	0.27	0.20	0.13	0.08
	-1.0	3.05	1.89	1.27	0.90	0.65	0.48	0.36	0.27	0.19	0.13	0.09
	-2.0	3.02	1.96	1.33	0.94	0.69	0.52	0.39	0.29	0.22	-	-
	-3.0	-	-	1.45	1.04	0.78	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-



Duty	Config	Sector	Osc Axle	Safety
2bL	RAIL	+/- 20° - +/- 45° Over Osc End		90%
				
	0 - 50mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.20	-	-	-	-	-	-
	6.0	-	-	-	-	-	0.97	0.75	0.55	-	-	-
	5.0	-	-	-	-	-	0.97	0.76	0.59	0.43	0.28	-
	4.0	-	-	-	-	1.21	0.94	0.74	0.58	0.45	0.31	0.18
	3.0	-	-	-	1.45	1.13	0.89	0.71	0.56	0.44	0.30	0.18
	2.0	-	2.51	1.80	1.37	1.07	0.85	0.68	0.55	0.41	0.27	0.16
	1.0	3.15	2.05	1.59	1.25	0.99	0.78	0.61	0.47	0.35	0.23	0.13
	0.0	3.14	1.98	1.43	1.09	0.85	0.67	0.52	0.40	0.28	0.18	0.10
	-1.0	3.10	1.98	1.39	1.03	0.78	0.61	0.47	0.34	0.23	0.15	0.09
	-2.0	3.16	2.03	1.41	1.04	0.77	0.57	0.43	0.31	0.23	-	-
	-3.0	-	-	1.46	1.05	0.78	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
	PAGE

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
2cU	RAIL	+/- 45° - +/- 135°		67%
				
	0 - 50mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	0.83	-	-	-	-	-	-
	6.0	-	-	-	-	-	0.69	0.52	0.34	-	-	-
	5.0	-	-	-	-	-	0.69	0.52	0.36	0.22	0.11	-
	4.0	-	-	-	-	0.82	0.65	0.47	0.32	0.20	0.11	0.02
	3.0	-	-	-	0.96	0.71	0.53	0.38	0.26	0.16	0.07	0.00
	2.0	-	1.58	1.06	0.77	0.56	0.37	0.27	0.18	0.10	0.03	-
	1.0	1.87	1.16	0.80	0.60	0.40	0.27	0.19	0.11	0.05	-	-
	0.0	1.87	1.14	0.78	0.55	0.36	0.24	0.15	0.08	0.02	-	-
	-1.0	1.89	1.16	0.80	0.58	0.38	0.24	0.15	0.08	0.02	-	-
	-2.0	1.86	1.21	0.84	0.62	0.42	0.28	0.18	0.10	0.05	-	-
	-3.0	-	-	0.93	0.69	0.51	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-



Duty	Config	Sector	Osc Axle	Safety
2cU	RAIL	+/- 45° - +/- 135°		67%
				
	0 - 50mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	0.84	-	-	-	-	-	-
	6.0	-	-	-	-	-	0.70	0.55	0.36	-	-	-
	5.0	-	-	-	-	-	0.70	0.56	0.41	0.26	0.13	-
	4.0	-	-	-	-	0.84	0.68	0.54	0.40	0.29	0.15	0.04
	3.0	-	-	-	0.98	0.78	0.64	0.50	0.38	0.27	0.14	0.04
	2.0	-	1.60	1.17	0.92	0.74	0.62	0.48	0.36	0.24	0.12	0.02
	1.0	1.97	1.27	1.02	0.83	0.69	0.55	0.40	0.28	0.18	0.07	-
	0.0	1.96	1.22	0.91	0.72	0.58	0.43	0.32	0.21	0.11	0.02	-
	-1.0	1.93	1.22	0.88	0.68	0.52	0.37	0.26	0.15	0.06	-	-
	-2.0	1.97	1.26	0.90	0.68	0.50	0.34	0.22	0.12	0.05	-	-
	-3.0	-	-	0.93	0.70	0.51	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	12 of 29

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
2cL	RAIL	+/- 45° - +/- 135°		90%
				
	0 - 50mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.10	-	-	-	-	-	-
	6.0	-	-	-	-	-	0.86	0.62	0.43	-	-	-
	5.0	-	-	-	-	-	0.87	0.62	0.44	0.29	0.17	-
	4.0	-	-	-	-	1.10	0.79	0.57	0.40	0.27	0.16	0.07
	3.0	-	-	-	1.36	0.92	0.65	0.47	0.34	0.22	0.13	0.05
	2.0	-	2.59	1.59	1.05	0.71	0.49	0.36	0.25	0.16	0.09	0.02
	1.0	3.40	1.88	1.16	0.78	0.54	0.38	0.27	0.19	0.11	0.05	-
	0.0	3.41	1.84	1.12	0.72	0.49	0.34	0.23	0.15	0.08	0.03	-
	-1.0	3.43	1.87	1.15	0.75	0.51	0.35	0.23	0.15	0.08	0.03	-
	-2.0	3.38	1.96	1.22	0.81	0.55	0.38	0.26	0.17	0.11	-	-
	-3.0	-	-	1.36	0.92	0.65	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-



Duty	Config	Sector	Osc Axle	Safety
2cL	RAIL	+/- 45° - +/- 135°		90%
				
	0 - 50mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.12	-	-	-	-	-	-
	6.0	-	-	-	-	-	0.88	0.66	0.45	-	-	-
	5.0	-	-	-	-	-	0.88	0.66	0.50	0.34	0.19	-
	4.0	-	-	-	-	1.12	0.84	0.64	0.49	0.36	0.21	0.09
	3.0	-	-	-	1.38	1.03	0.79	0.60	0.46	0.35	0.20	0.09
	2.0	-	2.63	1.77	1.29	0.97	0.74	0.58	0.45	0.31	0.18	0.07
	1.0	3.57	2.07	1.52	1.15	0.88	0.67	0.50	0.36	0.25	0.13	0.04
	0.0	3.55	1.98	1.34	0.97	0.73	0.55	0.41	0.29	0.18	0.08	0.00
	-1.0	3.49	1.98	1.29	0.91	0.66	0.48	0.35	0.23	0.12	0.05	-
	-2.0	3.57	2.04	1.31	0.91	0.64	0.45	0.30	0.19	0.12	-	-
	-3.0	-	-	1.37	0.93	0.65	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
	PAGE 13 of 29

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
2dU	RAIL	+/- 135° - +/- 150° Over Fixed End		67%
				
	0 - 50mm			

RADIUS


	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	
MINIMUM LOADS	8.0	-	-	-	-	-	-	-	-	-	-	
	7.0	-	-	-	1.65	-	-	-	-	-	-	
	6.0	-	-	-	-	1.41	1.19	1.01	-	-	-	
	5.0	-	-	-	-	1.41	1.19	1.02	0.88	0.76	-	
	4.0	-	-	-	1.65	1.37	1.16	0.99	0.86	0.75	0.66	
	3.0	-	-	1.93	1.54	1.28	1.10	0.95	0.83	0.73	0.65	
	2.0	-	3.04	2.24	1.75	1.42	1.18	1.03	0.90	0.80	0.71	0.63
	1.0	3.64b	2.67	2.00	1.59	1.32	1.12	0.98	0.86	0.76	0.68	0.61
	0.0	3.89	2.65	1.98	1.56	1.29	1.10	0.95	0.84	0.75	0.67	0.60
	-1.0	3.90	2.67	2.00	1.58	1.30	1.10	0.95	0.84	0.74	0.67	0.61
	-2.0	3.88	2.71	2.03	1.61	1.33	1.12	0.97	0.85	0.76	-	-
	-3.0	-	-	2.11	1.67	1.38	-	-	-	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	-	



Duty	Config	Sector	Osc Axle	Safety
2dU	RAIL	+/- 135° - +/- 150° Over Fixed End		67%
				
	0 - 50mm			

RADIUS

	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	
MAXIMUM LOADS	8.0	-	-	-	-	-	-	-	-	-	-	
	7.0	-	-	-	1.66	-	-	-	-	-	-	
	6.0	-	-	-	-	1.42	1.21	1.02	-	-	-	
	5.0	-	-	-	-	1.42	1.21	1.05	0.90	0.77	-	
	4.0	-	-	-	1.66	1.40	1.20	1.04	0.92	0.78	0.67	
	3.0	-	-	1.94	1.61	1.36	1.18	1.03	0.91	0.78	0.67	
	2.0	-	3.05	2.34	1.88	1.57	1.34	1.16	1.02	0.89	0.76	0.66
	1.0	3.97	2.77	2.20	1.81	1.52	1.29	1.11	0.97	0.85	0.73	0.64
	0.0	3.96	2.72	2.10	1.70	1.43	1.22	1.06	0.92	0.80	0.70	0.62
	-1.0	3.94	2.72	2.07	1.67	1.39	1.18	1.03	0.88	0.77	0.68	0.61
	-2.0	3.97	2.75	2.09	1.67	1.38	1.16	0.99	0.86	0.77	-	-
	-3.0	-	-	2.12	1.68	1.38	-	-	-	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	-	





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	14 of 29

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
2dL	RAIL	+/- 135° - +/- 150° Over Fixed End		90%
				
	0 - 50mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.95a	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.65r	1.50r	1.38r	-	-	-
	5.0	-	-	-	-	-	1.69r	1.50r	1.27b	1.24r	1.07	-
	4.0	-	-	-	-	1.72a	1.75r	1.49b	1.26b	1.10b	1.06	0.90
	3.0	-	-	-	2.72b	2.13b	1.74b	1.45b	1.23b	1.12r	1.03	0.88
	2.0	-	4.53r	3.49b	2.61b	2.06b	1.69b	1.42b	1.15r	1.08r	0.99	0.86
	1.0	3.64b	3.66a	3.24	2.58	2.07r	1.68r	1.48	1.27	1.10	0.96	0.83
	0.0	4.62a	3.53a	3.21	2.53	2.05	1.70	1.45	1.24	1.07	0.94	0.82
	-1.0	5.00	4.30	2.81b	2.47b	2.07	1.71	1.44	1.24	1.07	0.94	0.83
	-2.0	5.00	4.36	2.87b	2.09b	1.62b	1.46b	1.41b	1.21b	0.97b	-	-
	-3.0	-	-	3.03b	2.21b	1.72b	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-



Duty	Config	Sector	Osc Axle	Safety
2dL	RAIL	+/- 135° - +/- 150° Over Fixed End		90%
				
	0 - 50mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	2.14a	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.84b	1.74r	1.51	-	-	-
	5.0	-	-	-	-	-	1.84b	1.72r	1.53	1.31	1.08	-
	4.0	-	-	-	-	1.83a	2.00r	1.78	1.52	1.31	1.11	0.92
	3.0	-	-	-	2.90b	2.48	2.06	1.74	1.49	1.29	1.10	0.92
	2.0	-	4.79r	3.67	2.94	2.41	2.01	1.71	1.47	1.27	1.07	0.90
	1.0	5.00	4.44	3.51	2.87	2.35	1.96	1.66	1.42	1.23	1.03	0.87
	0.0	5.00	4.38	3.37	2.74	2.26	1.89	1.60	1.37	1.16	0.98	0.84
	-1.0	5.00	4.38	3.34	2.69	2.19	1.83	1.55	1.31	1.11	0.95	0.83
	-2.0	5.00	4.42	3.36	2.70	2.18	1.80	1.51	1.28	1.10	-	-
	-3.0	-	-	3.19b	2.56b	1.90b	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	15 of 29

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
2eU	RAIL	+/- 30° Over Fixed End		87%
				
	0 - 50mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.95a	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.65r	1.50r	1.38r	-	-	-
	5.0	-	-	-	-	-	1.69r	1.50r	1.27b	1.24r	1.17r	-
	4.0	-	-	-	-	1.72a	1.75r	1.49b	1.26b	1.10b	1.15r	1.05r
	3.0	-	-	-	2.72b	2.13b	1.74b	1.45b	1.23b	1.12r	1.20r	1.08r
	2.0	-	4.53r	3.49b	2.61b	2.06b	1.69b	1.42b	1.15r	1.08r	1.25r	1.13r
	1.0	3.64b	3.66a	3.41a	2.78r	2.07r	1.68r	1.51r	1.36r	1.26r	1.33r	1.18r
	0.0	4.62a	3.53a	3.42a	3.76a	3.02r	2.29r	1.87r	1.65r	1.59r	1.34r	1.15r
	-1.0	5.00	4.32b	2.81b	2.47b	2.48b	2.31b	2.13b	1.88b	1.65r	1.40r	1.10b
	-2.0	5.00	4.40b	2.87b	2.09b	1.62b	1.46b	1.41b	1.21b	0.97b	-	-
-3.0	-	-	3.03b	2.21b	1.72b	-	-	-	-	-	-	
-4.0	-	-	-	-	-	-	-	-	-	-	-	



Duty	Config	Sector	Osc Axle	Safety
2eU	RAIL	+/- 30° Over Fixed End		87%
				
	0 - 50mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	2.14a	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.84b	1.74r	1.65r	-	-	-
	5.0	-	-	-	-	-	1.84b	1.72r	1.62b	1.54r	1.42r	-
	4.0	-	-	-	-	1.83a	2.00r	1.83r	1.69b	1.57r	1.47r	1.37r
	3.0	-	-	-	2.90b	2.77r	2.35r	2.06r	1.84r	1.66r	1.53r	1.42r
	2.0	-	4.79r	4.62b	4.00b	3.55b	2.98r	2.41r	2.06r	1.81r	1.62r	1.49r
	1.0	5.00	5.00	5.00	4.91b	3.93b	3.26b	2.77b	2.34r	1.99r	1.75r	1.58r
	0.0	5.00	5.00	5.00	4.97b	3.94b	3.26b	2.77b	2.41b	2.12b	1.89r	1.68r
	-1.0	5.00	5.00	5.00	5.00	4.01b	3.31b	2.82b	2.44b	2.12b	1.76b	1.22b
	-2.0	5.00	5.00	5.00	4.84b	3.84b	3.11b	2.53b	1.99b	1.45b	-	-
-3.0	-	-	3.19b	2.56b	1.90b	-	-	-	-	-	-	
-4.0	-	-	-	-	-	-	-	-	-	-	-	





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
	PAGE 16 of 29

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
2eL	RAIL	+/- 30° Over Fixed End		90%
				
	0 - 50mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.95a	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.65r	1.50r	1.38r	-	-	-
	5.0	-	-	-	-	-	1.69r	1.50r	1.27b	1.24r	1.17r	-
	4.0	-	-	-	-	1.72a	1.75r	1.49b	1.26b	1.10b	1.15r	1.05r
	3.0	-	-	-	2.72b	2.13b	1.74b	1.45b	1.23b	1.12r	1.20r	1.08r
	2.0	-	4.53r	3.49b	2.61b	2.06b	1.69b	1.42b	1.15r	1.08r	1.25r	1.13r
	1.0	3.64b	3.66a	3.41a	2.78r	2.07r	1.68r	1.51r	1.36r	1.26r	1.33r	1.18r
	0.0	4.62a	3.53a	3.42a	3.76a	3.02r	2.29r	1.87r	1.65r	1.59r	1.34r	1.15r
	-1.0	5.00	4.32b	2.81b	2.47b	2.48b	2.31b	2.13b	1.88b	1.65r	1.40r	1.10b
	-2.0	5.00	4.40b	2.87b	2.09b	1.62b	1.46b	1.41b	1.21b	0.97b	-	-
-3.0	-	-	3.03b	2.21b	1.72b	-	-	-	-	-	-	
-4.0	-	-	-	-	-	-	-	-	-	-	-	



Duty	Config	Sector	Osc Axle	Safety
2eL	RAIL	+/- 30° Over Fixed End		90%
				
	0 - 50mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	2.14a	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.84b	1.74r	1.65r	-	-	-
	5.0	-	-	-	-	-	1.84b	1.72r	1.62b	1.54r	1.42r	-
	4.0	-	-	-	-	1.83a	2.00r	1.83r	1.69b	1.57r	1.47r	1.37r
	3.0	-	-	-	2.90b	2.77r	2.35r	2.06r	1.84r	1.66r	1.53r	1.42r
	2.0	-	4.79r	4.62b	4.00b	3.55b	2.98r	2.41r	2.06r	1.81r	1.62r	1.49r
	1.0	5.00	5.00	5.00	4.91b	3.93b	3.26b	2.77b	2.34r	1.99r	1.75r	1.58r
	0.0	5.00	5.00	5.00	4.97b	3.94b	3.26b	2.77b	2.41b	2.12b	1.89r	1.68r
	-1.0	5.00	5.00	5.00	5.00	4.01b	3.31b	2.82b	2.44b	2.12b	1.76b	1.22b
	-2.0	5.00	5.00	5.00	4.84b	3.84b	3.11b	2.53b	1.99b	1.45b	-	-
-3.0	-	-	3.19b	2.56b	1.90b	-	-	-	-	-	-	
-4.0	-	-	-	-	-	-	-	-	-	-	-	





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
	PAGE 17 of 29

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
3aU	RAIL	+/- 20° Over Osc End		67%
	 50 - 150mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.26	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.07	0.88	0.72	-	-	-
	5.0	-	-	-	-	-	1.07	0.88	0.73	0.61	0.47	-
	4.0	-	-	-	-	1.26	1.02	0.85	0.71	0.60	0.46	0.35
	3.0	-	-	-	1.49	1.15	0.93	0.78	0.67	0.55	0.43	0.33
	2.0	-	2.45	1.72	1.29	1.02	0.83	0.71	0.61	0.49	0.39	0.30
	1.0	3.19	2.04	1.46	1.13	0.91	0.76	0.66	0.55	0.44	0.35	0.28
	0.0	3.19	2.02	1.44	1.09	0.88	0.74	0.63	0.52	0.42	0.33	0.26
	-1.0	3.20	2.03	1.45	1.11	0.89	0.74	0.63	0.51	0.41	0.33	0.27
	-2.0	3.17	2.08	1.49	1.15	0.92	0.76	0.65	0.54	0.44	-	-
	-3.0	-	-	1.58	1.22	0.98	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-



Duty	Config	Sector	Osc Axle	Safety
3aU	RAIL	+/- 20° Over Osc End		67%
	 50 - 150mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.27	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.08	0.90	0.74	-	-	-
	5.0	-	-	-	-	-	1.08	0.90	0.77	0.64	0.48	-
	4.0	-	-	-	-	1.28	1.05	0.89	0.76	0.66	0.51	0.37
	3.0	-	-	-	1.50	1.22	1.02	0.87	0.75	0.65	0.50	0.36
	2.0	-	2.47	1.83	1.44	1.18	0.99	0.85	0.74	0.62	0.47	0.34
	1.0	3.28	2.15	1.68	1.36	1.12	0.95	0.80	0.68	0.57	0.43	0.31
	0.0	3.27	2.10	1.57	1.25	1.03	0.87	0.74	0.64	0.51	0.38	0.28
	-1.0	3.24	2.10	1.54	1.21	0.98	0.83	0.71	0.59	0.45	0.35	0.27
	-2.0	3.28	2.13	1.55	1.21	0.97	0.80	0.67	0.56	0.45	-	-
	-3.0	-	-	1.59	1.22	0.98	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	18 of 29

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
3aL	RAIL	+/- 20° Over Osc End		90%
	 50 - 150mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.72	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.42	1.14	0.91	-	-	-
	5.0	-	-	-	-	-	1.43	1.14	0.92	0.74	0.59	-
	4.0	-	-	-	-	1.72	1.36	1.09	0.88	0.72	0.58	0.46
	3.0	-	-	-	2.05	1.56	1.24	1.01	0.82	0.67	0.55	0.44
	2.0	-	3.33	2.40	1.79	1.38	1.09	0.90	0.75	0.62	0.51	0.41
	1.0	3.64b	2.85	2.05	1.56	1.22	0.99	0.82	0.68	0.57	0.47	0.39
	0.0	4.17	2.82	2.01	1.51	1.18	0.96	0.79	0.65	0.54	0.45	0.37
	-1.0	4.19	2.84	2.04	1.54	1.20	0.96	0.79	0.65	0.54	0.45	0.38
	-2.0	4.16	2.90	2.09	1.58	1.24	1.00	0.81	0.67	0.57	-	-
	-3.0	-	-	2.21	1.68	1.32	-	-	-	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	-	



Duty	Config	Sector	Osc Axle	Safety
3aL	RAIL	+/- 20° Over Osc End		90%
	 50 - 150mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.73	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.44	1.17	0.93	-	-	-
	5.0	-	-	-	-	-	1.44	1.18	0.97	0.78	0.60	-
	4.0	-	-	-	-	1.74	1.41	1.16	0.96	0.80	0.62	0.47
	3.0	-	-	-	2.07	1.66	1.36	1.12	0.94	0.78	0.61	0.47
	2.0	-	3.36	2.55	1.99	1.60	1.32	1.10	0.92	0.75	0.59	0.45
	1.0	4.28	2.97	2.34	1.88	1.52	1.25	1.03	0.84	0.69	0.54	0.42
	0.0	4.27	2.91	2.19	1.72	1.39	1.14	0.95	0.78	0.63	0.50	0.39
	-1.0	4.23	2.91	2.15	1.67	1.33	1.08	0.90	0.72	0.58	0.47	0.38
	-2.0	4.28	2.95	2.17	1.67	1.31	1.05	0.85	0.69	0.57	-	-
	-3.0	-	-	2.22	1.69	1.33	-	-	-	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	-	





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	19 of 29

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
3bU	RAIL	+/- 20° - +/- 45° Over Osc End		67%
	 50 - 150mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	0.82	-	-	-	-	-	-
	6.0	-	-	-	-	-	0.69	0.52	0.36	-	-	-
	5.0	-	-	-	-	-	0.69	0.53	0.37	0.24	0.13	-
	4.0	-	-	-	-	0.81	0.65	0.48	0.34	0.22	0.13	0.04
	3.0	-	-	-	0.94	0.71	0.54	0.39	0.28	0.18	0.09	0.02
	2.0	-	1.47	1.02	0.76	0.57	0.39	0.29	0.20	0.12	0.06	-
	1.0	1.67	1.11	0.79	0.61	0.42	0.29	0.21	0.14	0.07	0.02	-
	0.0	1.67	1.09	0.77	0.56	0.38	0.26	0.18	0.11	0.05	-	-
	-1.0	1.68	1.10	0.78	0.59	0.40	0.27	0.17	0.10	0.05	0.00	-
	-2.0	1.66	1.14	0.82	0.62	0.44	0.30	0.20	0.13	0.07	-	-
	-3.0	-	-	0.90	0.69	0.52	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-



Duty	Config	Sector	Osc Axle	Safety
3bU	RAIL	+/- 20° - +/- 45° Over Osc End		67%
	 50 - 150mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	0.83	-	-	-	-	-	-
	6.0	-	-	-	-	-	0.70	0.56	0.38	-	-	-
	5.0	-	-	-	-	-	0.70	0.56	0.42	0.28	0.15	-
	4.0	-	-	-	-	0.83	0.68	0.54	0.41	0.30	0.17	0.06
	3.0	-	-	-	0.95	0.78	0.64	0.51	0.39	0.29	0.16	0.06
	2.0	-	1.49	1.13	0.90	0.74	0.62	0.49	0.38	0.26	0.14	0.04
	1.0	1.75	1.20	0.99	0.82	0.68	0.56	0.41	0.30	0.20	0.09	0.01
	0.0	1.74	1.16	0.89	0.72	0.59	0.45	0.33	0.23	0.14	0.05	-
	-1.0	1.72	1.16	0.86	0.68	0.53	0.39	0.28	0.17	0.09	0.02	-
	-2.0	1.75	1.19	0.87	0.68	0.51	0.36	0.24	0.14	0.08	-	-
	-3.0	-	-	0.91	0.70	0.52	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	20 of 29

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
3bL	RAIL	+/- 20° - +/- 45° Over Osc End		90%
	 50 - 150mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.01	-	-	-	-	-	-
	6.0	-	-	-	-	-	0.79	0.57	0.39	-	-	-
	5.0	-	-	-	-	-	0.80	0.57	0.40	0.27	0.15	-
	4.0	-	-	-	-	1.00	0.73	0.53	0.37	0.25	0.14	0.06
	3.0	-	-	-	1.22	0.83	0.60	0.43	0.30	0.20	0.11	0.04
	2.0	-	2.20	1.39	0.93	0.64	0.44	0.32	0.23	0.14	0.07	0.01
	1.0	2.71	1.58	1.01	0.69	0.48	0.33	0.24	0.16	0.09	0.04	-
	0.0	2.71	1.55	0.97	0.64	0.43	0.30	0.20	0.13	0.07	0.01	-
	-1.0	2.73	1.57	1.00	0.66	0.45	0.31	0.20	0.12	0.06	0.01	-
	-2.0	2.69	1.65	1.06	0.71	0.49	0.34	0.23	0.15	0.09	-	-
	-3.0	-	-	1.19	0.82	0.58	-	-	-	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	-	



Duty	Config	Sector	Osc Axle	Safety
3bL	RAIL	+/- 20° - +/- 45° Over Osc End		90%
	 50 - 150mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.02	-	-	-	-	-	-
	6.0	-	-	-	-	-	0.81	0.60	0.41	-	-	-
	5.0	-	-	-	-	-	0.81	0.61	0.46	0.31	0.17	-
	4.0	-	-	-	-	1.02	0.77	0.59	0.45	0.33	0.19	0.07
	3.0	-	-	-	1.24	0.94	0.72	0.56	0.43	0.32	0.18	0.07
	2.0	-	2.23	1.56	1.15	0.88	0.68	0.53	0.41	0.28	0.16	0.05
	1.0	2.84	1.74	1.33	1.03	0.79	0.61	0.45	0.33	0.22	0.11	0.02
	0.0	2.83	1.67	1.16	0.86	0.66	0.50	0.37	0.26	0.16	0.06	-
	-1.0	2.78	1.67	1.12	0.80	0.59	0.43	0.32	0.20	0.10	0.03	-
	-2.0	2.84	1.72	1.15	0.81	0.57	0.40	0.27	0.17	0.10	-	-
	-3.0	-	-	1.20	0.83	0.58	-	-	-	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	-	





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	21 of 29

RATED LIFT CAPACITY CHART

RIS 1530


Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple



Duty	Config	Sector	Osc Axle	Safety
3cU	RAIL	+/- 45° - +/- 135°		67%
	 50 - 150mm			

RADIUS

MINIMUM LOADS

HEIGHT	RADIUS										
	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
8.0	-	-	-	-	-	-	-	-	-	-	-
7.0	-	-	-	-	0.78	-	-	-	-	-	-
6.0	-	-	-	-	-	0.64	0.43	0.26	-	-	-
5.0	-	-	-	-	-	0.64	0.43	0.27	0.14	0.03	-
4.0	-	-	-	-	0.77	0.58	0.38	0.23	0.12	0.02	-
3.0	-	-	-	0.92	0.65	0.43	0.28	0.16	0.07	-	-
2.0	-	1.65	1.02	0.70	0.45	0.26	0.16	0.08	0.00	-	-
1.0	2.13	1.14	0.72	0.47	0.27	0.15	0.07	0.01	-	-	-
0.0	2.14	1.11	0.69	0.41	0.22	0.11	0.03	-	-	-	-
-1.0	2.15	1.13	0.71	0.44	0.24	0.12	0.03	-	-	-	-
-2.0	2.11	1.19	0.76	0.50	0.29	0.16	0.06	-	-	-	-
-3.0	-	-	0.87	0.61	0.39	-	-	-	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	-




Duty	Config	Sector	Osc Axle	Safety
3cU	RAIL	+/- 45° - +/- 135°		67%
	 50 - 150mm			

RADIUS

MAXIMUM LOADS

HEIGHT	RADIUS										
	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
8.0	-	-	-	-	-	-	-	-	-	-	-
7.0	-	-	-	-	0.79	-	-	-	-	-	-
6.0	-	-	-	-	-	0.65	0.47	0.28	-	-	-
5.0	-	-	-	-	-	0.65	0.48	0.33	0.18	0.04	-
4.0	-	-	-	-	0.79	0.62	0.45	0.31	0.20	0.07	-
3.0	-	-	-	0.94	0.73	0.57	0.41	0.29	0.19	0.06	-
2.0	-	1.68	1.16	0.87	0.68	0.53	0.39	0.27	0.15	0.03	-
1.0	2.27	1.28	0.98	0.77	0.62	0.45	0.30	0.19	0.09	-	-
0.0	2.26	1.21	0.85	0.65	0.47	0.33	0.21	0.12	0.02	-	-
-1.0	2.21	1.21	0.81	0.60	0.40	0.26	0.16	0.05	-	-	-
-2.0	2.27	1.26	0.83	0.60	0.38	0.22	0.10	0.01	-	-	-
-3.0	-	-	0.87	0.62	0.39	-	-	-	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	-





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm and 't' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	22 of 29

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
3cL	RAIL	+/- 45° - +/- 135°		90%
	 50 - 150mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.10	-	-	-	-	-	-
	6.0	-	-	-	-	-	0.82	0.54	0.34	-	-	-
	5.0	-	-	-	-	-	0.82	0.55	0.35	0.20	0.07	-
	4.0	-	-	-	-	1.09	0.73	0.49	0.31	0.17	0.06	-
	3.0	-	-	-	1.42	0.87	0.57	0.37	0.23	0.12	0.03	-
	2.0	-	3.42	1.76	1.02	0.62	0.37	0.24	0.14	0.05	-	-
	1.0	3.64b	2.35	1.17	0.68	0.41	0.24	0.14	0.06	-	-	-
	0.0	4.62a	2.29	1.11	0.61	0.35	0.20	0.10	0.02	-	-	-
	-1.0	5.00	2.33	1.16	0.65	0.37	0.21	0.10	0.02	-	-	-
	-2.0	5.00	2.47	1.25	0.72	0.43	0.25	0.13	0.05	-	-	-
	-3.0	-	-	1.45	0.86	0.54	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-



Duty	Config	Sector	Osc Axle	Safety
3cL	RAIL	+/- 45° - +/- 135°		90%
	 50 - 150mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.12	-	-	-	-	-	-
	6.0	-	-	-	-	-	0.84	0.58	0.36	-	-	-
	5.0	-	-	-	-	-	0.84	0.59	0.41	0.24	0.09	-
	4.0	-	-	-	-	1.12	0.79	0.57	0.40	0.27	0.12	-
	3.0	-	-	-	1.45	1.01	0.73	0.52	0.38	0.26	0.11	-
	2.0	-	3.47	2.02	1.33	0.93	0.67	0.49	0.36	0.21	0.08	-
	1.0	5.00	2.65	1.67	1.16	0.82	0.59	0.40	0.26	0.15	0.02	-
	0.0	5.00	2.51	1.41	0.92	0.64	0.44	0.30	0.18	0.07	-	-
	-1.0	5.00	2.51	1.35	0.84	0.55	0.37	0.23	0.11	0.01	-	-
	-2.0	5.00	2.61	1.38	0.85	0.53	0.32	0.18	0.07	-	-	-
	-3.0	-	-	1.46	0.88	0.55	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	23 of 29

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
3dU	RAIL	$\pm 135^\circ - \pm 150^\circ$ Over Fixed End		67%
	 50 - 150mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.50	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.26	1.03	0.85	-	-	-
	5.0	-	-	-	-	-	1.26	1.03	0.86	0.73	0.61	-
	4.0	-	-	-	-	1.50	1.21	1.00	0.84	0.71	0.61	0.48
	3.0	-	-	-	1.79	1.37	1.11	0.93	0.79	0.68	0.57	0.46
	2.0	-	3.14	2.14	1.58	1.24	1.00	0.85	0.74	0.64	0.53	0.43
	1.0	3.64b	2.67	1.85	1.40	1.12	0.93	0.80	0.69	0.60	0.49	0.40
	0.0	4.50	2.64	1.82	1.37	1.09	0.90	0.77	0.67	0.57	0.47	0.39
	-1.0	4.51	2.66	1.84	1.39	1.10	0.91	0.77	0.66	0.57	0.47	0.39
	-2.0	4.48	2.72	1.89	1.42	1.13	0.93	0.79	0.68	0.60	-	-
	-3.0	-	-	1.99	1.50	1.19	-	-	-	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	-	



Duty	Config	Sector	Osc Axle	Safety
3dU	RAIL	$\pm 135^\circ - \pm 150^\circ$ Over Fixed End		67%
	 50 - 150mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.51	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.27	1.05	0.87	-	-	-
	5.0	-	-	-	-	-	1.27	1.06	0.90	0.75	0.62	-
	4.0	-	-	-	-	1.51	1.24	1.04	0.89	0.77	0.64	0.49
	3.0	-	-	-	1.81	1.45	1.20	1.02	0.88	0.76	0.63	0.49
	2.0	-	3.17	2.26	1.74	1.41	1.17	1.00	0.86	0.74	0.62	0.47
	1.0	4.61	2.79	2.09	1.65	1.35	1.13	0.95	0.81	0.69	0.57	0.44
	0.0	4.60	2.74	1.97	1.53	1.25	1.04	0.89	0.76	0.65	0.52	0.40
	-1.0	4.56	2.73	1.94	1.49	1.20	1.00	0.85	0.72	0.61	0.49	0.40
	-2.0	4.62	2.78	1.95	1.49	1.19	0.97	0.82	0.69	0.60	-	-
	-3.0	-	-	1.99	1.51	1.20	-	-	-	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	-	





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	24 of 29

RATED LIFT CAPACITY CHART

RIS 1530


Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple



Duty	Config	Sector	Osc Axle	Safety
3dL	RAIL	+/- 135° - +/- 150° Over Fixed End		90%
	 50 - 150mm			

RADIUS

MINIMUM LOADS

HEIGHT	RADIUS											
	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	
8.0	-	-	-	-	-	-	-	-	-	-	-	-
7.0	-	-	-	-	1.95a	-	-	-	-	-	-	-
6.0	-	-	-	-	-	1.65r	1.47	1.16	-	-	-	-
5.0	-	-	-	-	-	1.69r	1.47	1.17	0.93	0.74	-	-
4.0	-	-	-	-	1.72a	1.75r	1.42	1.13	0.91	0.73	0.58	-
3.0	-	-	-	-	2.72b	2.13b	1.65	1.31	1.06	0.86	0.69	0.56
2.0	-	4.53r	3.49b	2.59	1.91	1.46	1.18	0.97	0.79	0.65	0.53	-
1.0	3.64b	3.66a	3.19	2.29	1.71	1.34	1.09	0.89	0.74	0.61	0.50	-
0.0	4.62a	3.53a	3.15	2.22	1.66	1.30	1.05	0.86	0.71	0.59	0.49	-
-1.0	5.00	4.32b	2.81b	2.26	1.68	1.31	1.05	0.85	0.70	0.59	0.50	-
-2.0	5.00	4.40b	2.87b	2.09b	1.62b	1.35	1.08	0.88	0.73	-	-	-
-3.0	-	-	3.03b	2.21b	1.72b	-	-	-	-	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	-	-




Duty	Config	Sector	Osc Axle	Safety
3dL	RAIL	+/- 135° - +/- 150° Over Fixed End		90%
	 50 - 150mm			

RADIUS

MAXIMUM LOADS

HEIGHT	RADIUS											
	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	
8.0	-	-	-	-	-	-	-	-	-	-	-	-
7.0	-	-	-	-	2.14a	-	-	-	-	-	-	-
6.0	-	-	-	-	-	1.84b	1.51b	1.18	-	-	-	-
5.0	-	-	-	-	-	1.84b	1.51b	1.23	0.98	0.76	-	-
4.0	-	-	-	-	1.83a	1.85	1.49b	1.22	1.00	0.78	0.60	-
3.0	-	-	-	-	2.90b	2.25	1.78	1.45b	1.19	0.99	0.77	0.60
2.0	-	4.79r	3.80	2.81	2.17	1.73	1.42	1.17	0.95	0.74	0.58	-
1.0	5.00	5.00	3.58	2.71	2.09	1.67	1.33	1.08	0.88	0.69	0.54	-
0.0	5.00	5.00	3.38	2.51	1.93	1.53	1.24	1.01	0.81	0.64	0.51	-
-1.0	5.00	5.00	3.33	2.43	1.85	1.46	1.18	0.94	0.75	0.61	0.50	-
-2.0	5.00	5.00	3.36	2.44	1.83	1.42	1.12	0.90	0.74	-	-	-
-3.0	-	-	3.19b	2.46	1.84	-	-	-	-	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	-	-





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	25 of 29

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
3eU	RAIL	+/- 30° Over Fixed End		67%
	 50 - 150mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.95a	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.65r	1.50r	1.38r	-	-	-
	5.0	-	-	-	-	-	1.69r	1.50r	1.27b	1.24r	1.17r	-
	4.0	-	-	-	-	1.72a	1.75r	1.49b	1.26b	1.10b	1.15r	1.05r
	3.0	-	-	-	2.72b	2.13b	1.74b	1.45b	1.23b	1.12r	1.20r	1.08r
	2.0	-	4.53r	3.49b	2.61b	2.06b	1.69b	1.42b	1.15r	1.08r	1.25r	1.13r
	1.0	3.64b	3.66a	3.41a	2.78r	2.07r	1.68r	1.51r	1.36r	1.26r	1.30	1.18r
	0.0	4.62a	3.53a	3.42a	2.99	2.46	2.09	1.82	1.60	1.43	1.29	1.15r
	-1.0	5.00	4.32b	2.81b	2.47b	2.48	2.10	1.82	1.60	1.43	1.29	1.10b
	-2.0	5.00	4.40b	2.87b	2.09b	1.62b	1.46b	1.41b	1.21b	0.97b	-	-
	-3.0	-	-	3.03b	2.21b	1.72b	-	-	-	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	-	



Duty	Config	Sector	Osc Axle	Safety
3eU	RAIL	+/- 30° Over Fixed End		67%
	 50 - 150mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	2.14a	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.84b	1.74r	1.65r	-	-	-
	5.0	-	-	-	-	-	1.84b	1.72r	1.62b	1.54r	1.39	-
	4.0	-	-	-	-	1.83a	2.00r	1.83r	1.69b	1.57	1.40	1.24
	3.0	-	-	-	2.90b	2.75	2.32	2.00	1.76	1.56	1.39	1.24
	2.0	-	4.79r	4.14	3.27	2.70	2.29	1.98	1.74	1.54	1.37	1.22
	1.0	5.00	5.00	4.05	3.22	2.66	2.25	1.95	1.71	1.52	1.35	1.20
	0.0	5.00	5.00	3.94	3.15	2.61	2.22	1.92	1.69	1.49	1.32	1.18
	-1.0	5.00	5.00	3.91	3.11	2.57	2.18	1.89	1.65	1.45	1.30	1.17
	-2.0	5.00	5.00	3.93	3.11	2.56	2.16	1.86	1.63	1.45	-	-
	-3.0	-	-	3.19b	2.56b	1.90b	-	-	-	-	-	-
-4.0	-	-	-	-	-	-	-	-	-	-	-	





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	26 of 29

RATED LIFT CAPACITY CHART


RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
3eL	RAIL	+/- 30° Over Fixed End		90%
	 50 - 150mm			

MINIMUM LOADS


		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	1.95a	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.65r	1.50r	1.38r	-	-	-
	5.0	-	-	-	-	-	1.69r	1.50r	1.27b	1.24r	1.17r	-
	4.0	-	-	-	-	1.72a	1.75r	1.49b	1.26b	1.10b	1.15r	1.05r
	3.0	-	-	-	2.72b	2.13b	1.74b	1.45b	1.23b	1.12r	1.20r	1.08r
	2.0	-	4.53r	3.49b	2.61b	2.06b	1.69b	1.42b	1.15r	1.08r	1.25r	1.13r
	1.0	3.64b	3.66a	3.41a	2.78r	2.07r	1.68r	1.51r	1.36r	1.26r	1.33r	1.18r
	0.0	4.62a	3.53a	3.42a	3.76a	3.02r	2.29r	1.87r	1.65r	1.59r	1.34r	1.15r
	-1.0	5.00	4.32b	2.81b	2.47b	2.48b	2.31b	2.13b	1.88b	1.65r	1.40r	1.10b
	-2.0	5.00	4.40b	2.87b	2.09b	1.62b	1.46b	1.41b	1.21b	0.97b	-	-
-3.0	-	-	3.03b	2.21b	1.72b	-	-	-	-	-	-	
-4.0	-	-	-	-	-	-	-	-	-	-	-	



Duty	Config	Sector	Osc Axle	Safety
3eL	RAIL	+/- 30° Over Fixed End		90%
	 50 - 150mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	2.14a	-	-	-	-	-	-
	6.0	-	-	-	-	-	1.84b	1.74r	1.65r	-	-	-
	5.0	-	-	-	-	-	1.84b	1.72r	1.62b	1.54r	1.42r	-
	4.0	-	-	-	-	1.83a	2.00r	1.83r	1.69b	1.57r	1.47r	1.37r
	3.0	-	-	-	2.90b	2.77r	2.35r	2.06r	1.84r	1.66r	1.53r	1.42r
	2.0	-	4.79r	4.62b	4.00b	3.55b	2.98r	2.41r	2.06r	1.81r	1.62r	1.49r
	1.0	5.00	5.00	5.00	4.91b	3.93b	3.26b	2.77b	2.34r	1.99r	1.75r	1.58r
	0.0	5.00	5.00	5.00	4.97b	3.94b	3.26b	2.77b	2.41b	2.12b	1.89r	1.68r
	-1.0	5.00	5.00	5.00	5.00	4.01b	3.31b	2.82b	2.44b	2.12b	1.76b	1.22b
	-2.0	5.00	5.00	5.00	4.84b	3.84b	3.11b	2.53b	1.99b	1.45b	-	-
-3.0	-	-	3.19b	2.56b	1.90b	-	-	-	-	-	-	
-4.0	-	-	-	-	-	-	-	-	-	-	-	





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	27 of 29

RATED LIFT CAPACITY CHART

RIS 1530



Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple

Duty	Config	Sector	Osc Axle	Safety
4aU	RAIL	360.0°		67%
	 151 - 178mm			

MINIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	0.72	-	-	-	-	-	-
	6.0	-	-	-	-	-	0.58	0.37	0.20	-	-	-
	5.0	-	-	-	-	-	0.58	0.37	0.21	0.09	-	-
	4.0	-	-	-	-	0.72	0.51	0.32	0.18	0.07	-	-
	3.0	-	-	-	0.85	0.58	0.36	0.22	0.11	0.02	-	-
	2.0	-	1.53	0.93	0.63	0.37	0.19	0.10	0.02	-	-	-
	1.0	1.91	1.01	0.63	0.36	0.19	0.08	0.01	-	-	-	-
	0.0	1.92	0.98	0.60	0.30	0.14	0.04	-	-	-	-	-
	-1.0	1.93	1.00	0.62	0.33	0.16	0.05	-	-	-	-	-
	-2.0	1.89	1.06	0.67	0.39	0.21	0.08	-	-	-	-	-
	-3.0	-	-	0.78	0.51	0.30	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-



Duty	Config	Sector	Osc Axle	Safety
4aU	RAIL	360.0°		67%
	 151 - 178mm			

MAXIMUM LOADS

		RADIUS										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
HEIGHT	8.0	-	-	-	-	-	-	-	-	-	-	-
	7.0	-	-	-	-	0.73	-	-	-	-	-	-
	6.0	-	-	-	-	-	0.60	0.40	0.22	-	-	-
	5.0	-	-	-	-	-	0.60	0.41	0.27	0.13	-	-
	4.0	-	-	-	-	0.73	0.56	0.39	0.26	0.15	0.02	-
	3.0	-	-	-	0.87	0.67	0.50	0.35	0.24	0.14	0.02	-
	2.0	-	1.55	1.06	0.80	0.63	0.46	0.32	0.22	0.10	-	-
	1.0	2.05	1.15	0.89	0.70	0.54	0.38	0.24	0.13	0.04	-	-
	0.0	2.04	1.08	0.76	0.56	0.39	0.25	0.15	0.06	-	-	-
	-1.0	1.99	1.08	0.72	0.49	0.31	0.19	0.09	-	-	-	-
	-2.0	2.05	1.13	0.74	0.50	0.29	0.15	0.04	-	-	-	-
	-3.0	-	-	0.78	0.52	0.31	-	-	-	-	-	-
	-4.0	-	-	-	-	-	-	-	-	-	-	-





NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	28 of 29

RATED LIFT CAPACITY CHART

RIS 1530

Machine Type	NEW HOLLAND MH2.6 A..	Equipment	1.75m + 2.20m + 2.00m
Issue Date	02/07/2013	Serial No.	M00902 (2083)
FIRST of CLASS	Not Found	Additional Info.	Bucket Pin, Triple



Duty	Config	Sector	Osc Axle	Safety
4aL	RAIL	360.0°		90%
	 151 - 178mm			

RADIUS

MINIMUM LOADS

HEIGHT	RADIUS											
	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	
8.0	-	-	-	-	-	-	-	-	-	-	-	
7.0	-	-	-	-	1.04	-	-	-	-	-	-	
6.0	-	-	-	-	-	0.76	0.48	0.28	-	-	-	
5.0	-	-	-	-	-	0.76	0.49	0.29	0.14	0.02	-	
4.0	-	-	-	-	1.03	0.67	0.43	0.25	0.12	0.01	-	
3.0	-	-	-	1.36	0.80	0.50	0.31	0.17	0.06	-	-	
2.0	-	3.56	1.71	0.94	0.54	0.29	0.17	0.08	-	-	-	
1.0	3.64b	2.34	1.07	0.58	0.32	0.16	0.07	-	-	-	-	
0.0	4.62a	2.27	1.00	0.50	0.26	0.12	0.03	-	-	-	-	
-1.0	5.00	2.32	1.05	0.54	0.28	0.13	0.02	-	-	-	-	
-2.0	5.00	2.48	1.15	0.62	0.34	0.17	0.06	-	-	-	-	
-3.0	-	-	1.37	0.77	0.46	-	-	-	-	-	-	
-4.0	-	-	-	-	-	-	-	-	-	-	-	



Duty	Config	Sector	Osc Axle	Safety
4aL	RAIL	360.0°		90%
	 151 - 178mm			

RADIUS

MAXIMUM LOADS

HEIGHT	RADIUS											
	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	
8.0	-	-	-	-	-	-	-	-	-	-	-	
7.0	-	-	-	-	1.06	-	-	-	-	-	-	
6.0	-	-	-	-	-	0.78	0.53	0.30	-	-	-	
5.0	-	-	-	-	-	0.78	0.54	0.36	0.19	0.04	-	
4.0	-	-	-	-	1.06	0.73	0.51	0.35	0.22	0.07	-	
3.0	-	-	-	1.40	0.95	0.66	0.47	0.32	0.20	0.06	-	
2.0	-	3.62	1.98	1.26	0.86	0.61	0.43	0.30	0.16	0.03	-	
1.0	5.00	2.69	1.60	1.08	0.75	0.52	0.34	0.20	0.09	-	-	
0.0	5.00	2.53	1.33	0.84	0.56	0.37	0.23	0.12	0.01	-	-	
-1.0	5.00	2.52	1.26	0.75	0.47	0.29	0.17	0.04	-	-	-	
-2.0	5.00	2.64	1.30	0.76	0.44	0.24	0.11	0.01	-	-	-	
-3.0	-	-	1.38	0.79	0.46	-	-	-	-	-	-	
-4.0	-	-	-	-	-	-	-	-	-	-	-	



NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).
PAGE	29 of 29