

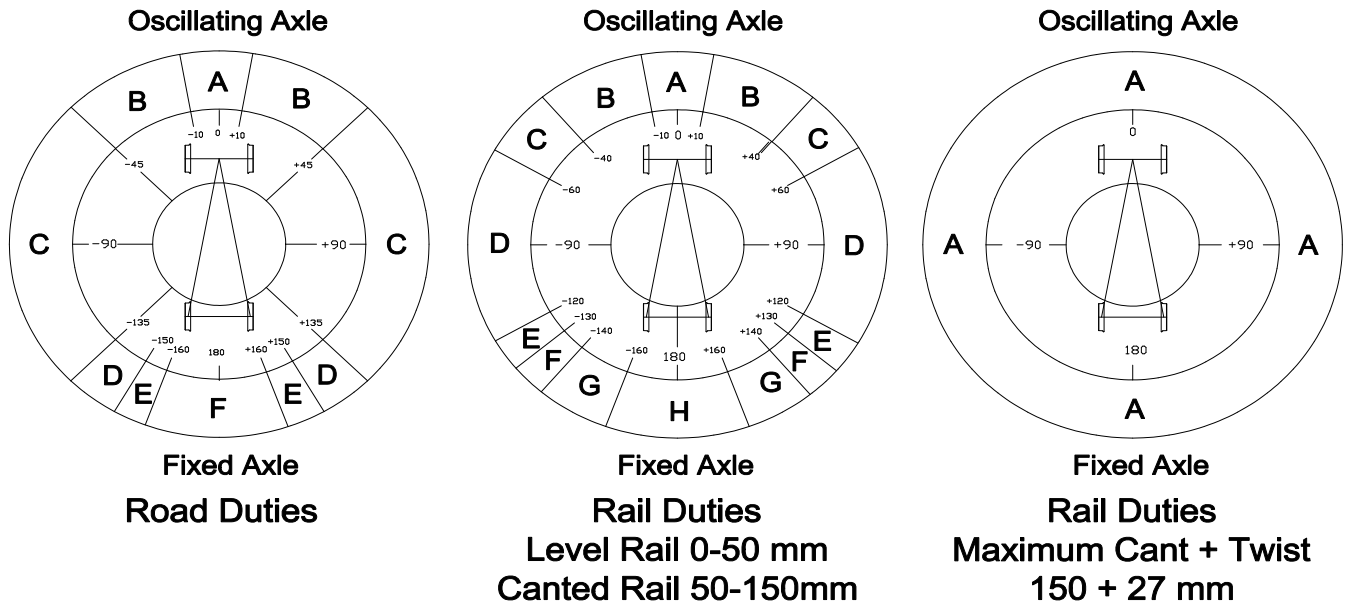
ROADRAILER

by REXQUOTE

e-mail: sales@rexquote.co.uk

Web: www.rexquote.co.uk

TEL:01823 433398



Machine fitted with permanently attached Quick Hitch

Tool Pin Charts

Machine Type:	Komatsu PW160	
Serial Number:	H55920	
Rail Axle Number:	2360	
Network Rail Number:	99709 910045-2	
Equipment:	Boom 5.15m Arm 2.1m	
Date:	25th June 2015	
Issue:	1	
Software Versions:		
	Safety Controller	V1.24.9.5
	I/O Controller 1	V1.24.9.5
	I/O Controller 2	V1.24.9.5
	MMI	V1.24.9.4

This machine is equipped with a PME Rated Capacity Indicator. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530-PLT Issue 5

Radius / Height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the lifting point with no other equipment attached. This machine is fitted with an hydraulically adjustable boom.

This allows the machine to reach the same point in space with a variety of different equipment angles, each combination has a different safe working load. The charts on the following pages show both the upper & lower limits of the loads achievable. Loads marked 'b' boom, 'r' articulation, and 'a' arm are limited by hydraulic capacity.

All rail duties listed are valid for use on and up to a 1:25 gradient, and with a maximum track twist of 27mm.



25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

1a	i6!												
	ROAD												
	LEVEL ROAD @ 75% of tipping load												
SECTOR													
+/-10° Over Floating Axle													
OSC. AXLE													
FLOAT (Lift & Carry)													
	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.0	6.5	7.0	7.5	8.0
8.00					2.88a	3.13a	2.53a						
7.00					3.25	3.23	3.23	3.16	2.60				
6.00					3.41	3.48	3.39	3.18	2.72	2.39			
5.00			5.55	4.91	4.25k	4.00	3.59	3.11	2.71	2.37	2.09		
4.00	5.68	4.79	4.32	5.45	4.60	3.93	3.41	2.98	2.62	2.32	2.05	1.82	
3.00			4.26	4.47	4.12	3.62	3.18	2.81	2.49	2.22	1.98	1.77	
2.00				3.55	3.53	3.31	2.96	2.64	2.36	2.12	1.90	1.71	
1.00				2.97	3.07	3.03	2.79	2.50	2.25	2.02	1.83	1.65	
0.00				2.77	2.78	2.80	2.70	2.41	2.16	1.95	1.77	1.61	
-1.00				2.71	2.63	2.73	2.67	2.37	2.12	1.92	1.74	1.59	
-2.00			3.06	2.76	2.77	3.06	2.68	2.37	2.12	1.91	1.75		
-3.00		3.64	3.18	3.03	3.64	3.12	2.72	2.41	2.17	1.88			
-4.0			4.07	3.86	3.50	3.10	2.73	2.39					

1a	i6!												
	ROAD												
	LEVEL ROAD @ 75% of tipping load												
SECTOR													
+/-10° Over Floating Axle													
OSC. AXLE													
LOCKED (Static lift only)													
	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.0	6.5	7.0	7.5	8.0
8.00					2.88a	3.13a	2.53a						
7.00					3.66	3.64	3.64	3.49	2.69a				
6.00					3.85	3.94	3.83	3.58	3.05	2.66a			
5.00			6.46a	5.17k	4.35k	4.57	4.07	3.51	3.05	2.66	2.35		
4.00	6.65a	5.50k	4.72k	6.39	5.32	4.48	3.88	3.37	2.95	2.61	2.30	2.04	
3.00			4.93	5.20	4.77	4.17	3.63	3.19	2.82	2.50	2.23	1.99	
2.00				4.10	4.09	3.84	3.39	3.01	2.68	2.39	2.15	1.93	
1.00				3.43	3.55	3.50	3.22	2.86	2.56	2.30	2.07	1.87	
0.00				3.20	3.21	3.24	3.12	2.77	2.47	2.22	2.01	1.82	
-1.00				3.14	3.04	3.16	3.09	2.73	2.43	2.18	1.98	1.80	
-2.00			3.57	3.21	3.21	3.57	3.10	2.72	2.43	2.18	1.99		
-3.00		4.29	3.71	3.53	4.29	3.64	3.15	2.77	2.48	2.14			
-4.0			4.36b	4.25b	3.91b	3.51b	3.11	2.70					

NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar). All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm
PAGE	2 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET EQUIPMENT	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

1b													
	ROAD												
	LEVEL Road @ 75% of tipping load												
SECTOR													
10° - 45° Over Floating Axle													
OSC. AXLE													
FLOAT (Lift & Carry)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.00					2.04	2.00	2.03						
7.0					1.92	1.91	2.06	1.85	1.52				
6.0					2.02	2.07	2.01	1.87	1.54	1.30			
5.0			3.37	2.97	2.66	2.40	2.13	1.80	1.52	1.28	1.09		
4.0	3.45	2.93	2.59	3.31	2.75	2.31	1.96	1.68	1.43	1.23	1.05	0.88	
3.0			2.44	2.57	2.31	2.01	1.74	1.51	1.31	1.13	0.98	0.83	
2.0				1.88	1.86	1.71	1.52	1.34	1.18	1.03	0.90	0.78	
1.0				1.45	1.52	1.48	1.35	1.20	1.06	0.94	0.82	0.72	
0.0				1.29	1.31	1.32	1.25	1.10	0.98	0.86	0.76	0.67	
-1.0				1.24	1.20	1.25	1.21	1.06	0.93	0.82	0.73	0.65	
-2.0			1.43	1.26	1.26	1.43	1.22	1.06	0.93	0.82	0.74		
-3.0		1.77	1.50	1.42	1.78	1.49	1.27	1.11	0.99	0.82			
-4.0			2.02	1.91	1.71	1.50	1.30	1.12					

1b													
	ROAD												
	LEVEL Road @ 75% of tipping load												
SECTOR													
10° - 45° Over Floating Axle													
OSC. AXLE													
LOCKED (Static lift only)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.00					2.88a	3.13a	2.53a						
7.0					3.52	3.50	3.50	3.35	2.69a				
6.0					3.71	3.80	3.69	3.44	2.90	2.53			
5.0			6.46a	5.17k	4.25k	4.44	3.93	3.36	2.90	2.51	2.20		
4.0	6.65a	5.46	4.72k	6.36	5.22	4.35	3.73	3.22	2.80	2.45	2.15	1.89	
3.0			4.81	5.09	4.64	4.02	3.48	3.03	2.66	2.35	2.08	1.84	
2.0				3.95	3.93	3.67	3.22	2.84	2.51	2.23	1.99	1.78	
1.0				3.26	3.37	3.33	3.04	2.69	2.39	2.13	1.91	1.72	
0.0				3.02	3.04	3.06	2.94	2.59	2.30	2.06	1.85	1.67	
-1.0				2.96	2.86	2.98	2.91	2.55	2.26	2.02	1.82	1.65	
-2.0			3.39	3.02	3.03	3.39	2.91	2.55	2.25	2.02	1.83		
-3.0		4.13	3.53	3.35	4.13	3.46	2.97	2.60	2.31	1.97			
-4.0			4.36b	4.24	3.83	3.37	2.97b	2.57					

NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar). All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm
PAGE	3 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

1c														
	ROAD													
	LEVEL Road @ 75% of tipping load													
SECTOR														
45° - 135°														
OSC. AXLE														
FLOAT (Lift & Carry)														
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	
8.00					2.36	2.32	2.35							
7.0					2.23	2.22	2.38	2.16	1.79					
6.0					2.35	2.40	2.33	2.18	1.81	1.55				
5.0			3.88	3.42	3.07	2.77	2.47	2.10	1.80	1.53	1.32			
4.0	3.97	3.38	3.00	3.81	3.18	2.69	2.30	1.98	1.71	1.48	1.28	1.10		
3.0			2.86	3.01	2.73	2.38	2.08	1.81	1.59	1.39	1.21	1.05		
2.0				2.27	2.25	2.08	1.85	1.64	1.45	1.28	1.13	0.99		
1.0				1.81	1.88	1.84	1.68	1.50	1.34	1.19	1.06	0.94		
0.0				1.63	1.65	1.67	1.59	1.41	1.25	1.12	1.00	0.89		
-1.0				1.58	1.54	1.60	1.55	1.36	1.21	1.08	0.97	0.87		
-2.0			1.81	1.61	1.61	1.81	1.56	1.36	1.21	1.08	0.98			
-3.0		2.20	1.89	1.79	2.21	1.87	1.61	1.41	1.27	1.06				
-4.0			2.50	2.36	2.13	1.87	1.64	1.42						

1c														
	ROAD													
	LEVEL Road @ 75% of tipping load													
SECTOR														
45° - 135°														
OSC. AXLE														
LOCKED (Static lift only)														
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	
8.00					2.88a	3.13a	2.53a							
7.0					3.46	3.45	3.44	3.30	2.69a					
6.0					3.66	3.74	3.64	3.39	2.86	2.48				
5.0			6.39	5.17k	4.25k	4.38	3.87	3.31	2.85	2.47	2.16			
4.0	6.57	5.38	4.72k	6.27	5.14	4.29	3.67	3.17	2.75	2.41	2.11	1.86		
3.0			4.73	5.01	4.57	3.95	3.42	2.98	2.61	2.30	2.04	1.81		
2.0				3.88	3.86	3.61	3.17	2.79	2.47	2.19	1.95	1.74		
1.0				3.20	3.31	3.27	2.98	2.64	2.34	2.09	1.87	1.68		
0.0				2.96	2.98	3.00	2.89	2.54	2.26	2.02	1.81	1.63		
-1.0				2.90	2.80	2.92	2.85	2.49	2.21	1.98	1.78	1.61		
-2.0			3.33	2.96	2.97	3.33	2.86	2.49	2.21	1.97	1.79			
-3.0		4.05	3.46	3.29	4.05	3.39	2.91	2.54	2.27	1.93				
-4.0			4.35b	4.16	3.76b	3.35b	2.92	2.52						

NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar). All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm
PAGE	4 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

1d														
	ROAD													
	LEVEL Road @ 75% of tipping load													
SECTOR														
135° - 150° Over Fixed Axle														
OSC. AXLE														
FLOAT (Lift & Carry)														
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	
8.00					2.88a	3.13a	2.53a							
7.0					3.77a	4.04a	4.02a	3.69a	2.69a					
6.0					4.44a	4.51a	4.47a	4.35a	4.06a	3.40a				
5.0			6.46a	5.17k	5.36a	5.42a	5.19a	4.86a	4.43	3.91	3.47			
4.0	6.65a	7.38a	4.72k	7.34a	7.50	6.34	5.33a	4.89	4.33	3.86	3.46	3.11		
3.0			7.10	7.48	6.93	6.09	5.34	4.71	4.20	3.76	3.39	3.06		
2.0				6.08	6.06	5.76	5.09	4.53	4.05	3.65	3.30	3.00		
1.0				5.22	5.37	5.33	4.92	4.38	3.93	3.55	3.22	2.94		
0.0				4.94	4.94	4.99	4.83	4.29	3.85	3.48	3.17	2.89		
-1.0				4.87	4.72	4.90	4.80	4.25	3.81	3.44	3.13	2.87		
-2.0			5.51	4.97	4.98	5.51	4.80	4.25	3.81	3.44	3.14			
-3.0		5.09b	5.45b	5.44	5.86b	5.37b	4.81	4.27	3.82	3.20a				
-4.0			4.36b	4.37b	4.21b	3.93b	3.52b	2.84b						

1d														
	ROAD													
	LEVEL Road @ 75% of tipping load													
SECTOR														
135° - 150° Over Fixed Axle														
OSC. AXLE														
LOCKED (Static lift only)														
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	
8.00					2.88a	3.13a	2.53a							
7.0					3.77a	4.04a	4.02a	3.69a	2.69a					
6.0					4.44a	4.51a	4.47a	4.35a	4.06a	3.40a				
5.0			6.46a	5.17k	5.36a	5.42a	5.19a	4.86a	4.43	3.91	3.47			
4.0	6.65a	7.38a	4.72k	7.34a	7.50	6.34	5.33a	4.89	4.33	3.86	3.46	3.11		
3.0			7.10	7.48	6.93	6.09	5.34	4.71	4.20	3.76	3.39	3.06		
2.0				6.08	6.06	5.76	5.09	4.53	4.05	3.65	3.30	3.00		
1.0				5.22	5.37	5.33	4.92	4.38	3.93	3.55	3.22	2.94		
0.0				4.94	4.94	4.99	4.83	4.29	3.85	3.48	3.17	2.89		
-1.0				4.87	4.72	4.90	4.80	4.25	3.81	3.44	3.13	2.87		
-2.0			5.51	4.97	4.98	5.51	4.80	4.25	3.81	3.44	3.14			
-3.0		5.09b	5.45b	5.44	5.86b	5.37b	4.81	4.27	3.82	3.20a				
-4.0			4.36b	4.37b	4.21b	3.93b	3.52b	2.84b						

NOTES	<p>Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.</p> <p>Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar).</p> <p>All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm</p>
PAGE	1 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk



MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015

This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

1e													
	ROAD												
	LEVEL Road @ 75% of tipping load												
SECTOR													
150° - 160°													
OSC. AXLE													
FLOAT (Lift & Carry)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.00					2.88a	3.13a	2.53a						
7.0					3.77a	4.04a	4.02a	3.69a	2.69a				
6.0					4.44a	4.51a	4.47a	4.35a	4.06a	3.40a			
5.0			6.46a	5.17k	5.36a	5.42a	5.19a	4.86a	4.43	3.91	3.47		
4.0	6.65a	7.38a	4.72k	7.34a	7.50	6.34	5.33a	4.89	4.33	3.86	3.46	3.11	
3.0			7.10	7.48	6.93	6.09	5.34	4.71	4.20	3.76	3.39	3.06	
2.0				6.08	6.06	5.76	5.09	4.53	4.05	3.65	3.30	3.00	
1.0				5.22	5.37	5.33	4.92	4.38	3.93	3.55	3.22	2.94	
0.0				4.94	4.94	4.99	4.83	4.29	3.85	3.48	3.17	2.89	
-1.0				4.87	4.72	4.90	4.80	4.25	3.81	3.44	3.13	2.87	
-2.0			5.51	4.97	4.98	5.51	4.80	4.25	3.81	3.44	3.14		
-3.0		5.09b	5.45b	5.44	5.86b	5.37b	4.81	4.27	3.82	3.20a			
-4.0			4.36b	4.37b	4.21b	3.93b	3.52b	2.84b					

1e													
	ROAD												
	LEVEL Road @ 75% of tipping load												
SECTOR													
160° - 180° Over Fixed Axle													
OSC. AXLE													
LOCKED (Static lift only)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.00					2.88a	3.13a	2.53a						
7.0					3.77a	4.04a	4.02a	3.69a	2.69a				
6.0					4.44a	4.51a	4.47a	4.35a	4.06a	3.40a			
5.0			6.46a	5.17k	5.36a	5.42a	5.19a	4.86a	4.43	3.91	3.47		
4.0	6.65a	7.38a	4.72k	7.34a	7.50	6.34	5.33a	4.89	4.33	3.86	3.46	3.11	
3.0			7.10	7.48	6.93	6.09	5.34	4.71	4.20	3.76	3.39	3.06	
2.0				6.08	6.06	5.76	5.09	4.53	4.05	3.65	3.30	3.00	
1.0				5.22	5.37	5.33	4.92	4.38	3.93	3.55	3.22	2.94	
0.0				4.94	4.94	4.99	4.83	4.29	3.85	3.48	3.17	2.89	
-1.0				4.87	4.72	4.90	4.80	4.25	3.81	3.44	3.13	2.87	
-2.0			5.51	4.97	4.98	5.51	4.80	4.25	3.81	3.44	3.14		
-3.0		5.09b	5.45b	5.44	5.86b	5.37b	4.81	4.27	3.82	3.20a			
-4.0			4.36b	4.37b	4.21b	3.93b	3.52b	2.84b					

NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar).
	All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm
PAGE	6 Of 24



25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

1f			ROAD										
			LEVEL Road @ 75% of tipping load										
			SECTOR 160° - 180°										
OSC. AXLE FLOAT (Lift & Carry)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.00					2.88a	3.13a	2.53a						
7.0					3.77a	4.04a	4.02a	3.69a	2.69a				
6.0					4.44a	4.51a	4.47a	4.35a	4.06a	3.40a			
5.0			6.46a	5.17k	5.36a	5.42a	5.19a	4.86a	4.43	3.91	3.47		
4.0	6.65a	7.38a	4.72k	7.34a	7.50	6.34	5.33a	4.89	4.33	3.86	3.46	3.11	
3.0			7.10	7.48	6.93	6.09	5.34	4.71	4.20	3.76	3.39	3.06	
2.0				6.08	6.06	5.76	5.09	4.53	4.05	3.65	3.30	3.00	
1.0				5.22	5.37	5.33	4.92	4.38	3.93	3.55	3.22	2.94	
0.0				4.94	4.94	4.99	4.83	4.29	3.85	3.48	3.17	2.89	
-1.0				4.87	4.72	4.90	4.80	4.25	3.81	3.44	3.13	2.87	
-2.0			5.51	4.97	4.98	5.51	4.80	4.25	3.81	3.44	3.14		
-3.0		5.09b	5.45b	5.44	5.86b	5.37b	4.81	4.27	3.82	3.20a			
-4.0			4.36b	4.37b	4.21b	3.93b	3.52b	2.84b					


1f			ROAD										
			LEVEL Road @ 75% of tipping load										
			SECTOR 160° - 180°										
OSC. AXLE LOCKED (Static lift only)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.00					2.88a	3.13a	2.53a						
7.0					3.77a	4.04a	4.02a	3.69a	2.69a				
6.0					4.44a	4.51a	4.47a	4.35a	4.06a	3.40a			
5.0			6.46a	5.17k	5.36a	5.42a	5.19a	4.86a	4.43	3.91	3.47		
4.0	6.65a	7.38a	4.72k	7.34a	7.50	6.34	5.33a	4.89	4.33	3.86	3.46	3.11	
3.0			7.10	7.48	6.93	6.09	5.34	4.71	4.20	3.76	3.39	3.06	
2.0				6.08	6.06	5.76	5.09	4.53	4.05	3.65	3.30	3.00	
1.0				5.22	5.37	5.33	4.92	4.38	3.93	3.55	3.22	2.94	
0.0				4.94	4.94	4.99	4.83	4.29	3.85	3.48	3.17	2.89	
-1.0				4.87	4.72	4.90	4.80	4.25	3.81	3.44	3.13	2.87	
-2.0			5.51	4.97	4.98	5.51	4.80	4.25	3.81	3.44	3.14		
-3.0		5.09b	5.45b	5.44	5.86b	5.37b	4.81	4.27	3.82	3.20a			
-4.0			4.36b	4.37b	4.21b	3.93b	3.52b	2.84b					

NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar). All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm
PAGE	7 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

2a													
	RAIL												
	LEVEL RAIL @ 67% of tipping load												
SECTOR													
+/-10° Over Float Axle													
OSC. AXLE													
FLOAT (Lift & Carry)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.00					2.88a	3.13a	2.53a						
7.0					3.11	3.10	3.10	3.04	2.58				
6.0					3.26	3.33	3.25	3.05	2.62	2.31			
5.0			5.24	4.65	4.20	3.82	3.43	2.99	2.62	2.30	2.04		
4.0	5.35	4.60	4.11	5.15	4.37	3.75	3.27	2.87	2.54	2.25	2.00	1.78	
3.0			4.06	4.26	3.94	3.48	3.07	2.72	2.42	2.17	1.94	1.74	
2.0				3.42	3.40	3.21	2.87	2.57	2.30	2.07	1.87	1.69	
1.0				2.89	2.98	2.94	2.72	2.44	2.20	1.99	1.80	1.64	
0.0				2.70	2.72	2.74	2.64	2.37	2.13	1.93	1.75	1.60	
-1.0				2.65	2.58	2.67	2.61	2.33	2.09	1.90	1.72	1.58	
-2.0			2.99	2.70	2.71	2.99	2.62	2.33	2.09	1.89	1.73		
-3.0		3.52	3.09	2.95	3.53	3.04	2.66	2.37	2.14	1.86			
-4.0			3.92	3.72	3.39	3.02	2.67	2.35					


2a													
	RAIL												
	LEVEL RAIL @ 75% of tipping load												
SECTOR													
+/-10° Over Float Axle													
OSC. AXLE													
LOCKED (Static lift only)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.00					2.88a	3.13a	2.53a						
7.0					3.77a	4.04a	4.02a	3.69a	2.69a				
6.0					4.44a	4.51a	4.47a	4.35a	4.06a	3.40a			
5.0			6.46a	5.17k	5.36a	5.41a	5.14a	4.80a	4.33	3.82	3.41a		
4.0	6.65a	7.36	4.72k	7.34a	7.36	6.24	5.33a	4.78	4.23	3.77	3.37	3.03	
3.0			6.94	7.31	6.77	5.95	5.21	4.60	4.10	3.67	3.30	2.98	
2.0				5.94	5.92	5.62	4.97	4.42	3.95	3.56	3.22	2.92	
1.0				5.09	5.24	5.19	4.80	4.27	3.83	3.46	3.14	2.86	
0.0				4.81	4.81	4.86	4.71	4.18	3.75	3.39	3.08	2.81	
-1.0				4.74	4.59	4.77	4.67	4.14	3.71	3.35	3.05	2.79	
-2.0			5.37	4.84	4.85	5.37	4.68	4.14	3.70	3.35	3.06a		
-3.0		5.09b	5.45b	5.30	5.81	5.26	4.70b	4.18	3.73	3.20a			
-4.0			4.36b	4.37b	4.21b	3.93b	3.52b	2.84b					

NOTES	<p>Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.</p> <p>Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar).</p> <p>All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm</p>
PAGE	8 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

2b													
	RAIL												
	LEVEL RAIL @ 67% of tipping load												
SECTOR													
10° - 40°													
OSC. AXLE													
FLOAT (Lift & Carry)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.00					2.19	2.16	2.18						
7.00					2.08	2.07	2.21	2.02	1.70				
6.00					2.18	2.22	2.17	2.03	1.72	1.49			
5.00			3.43	3.06	2.78	2.54	2.29	1.97	1.71	1.48	1.29		
4.00	3.50	3.03	2.72	3.37	2.87	2.47	2.14	1.86	1.63	1.43	1.25	1.09	
3.00			2.61	2.73	2.50	2.21	1.95	1.73	1.53	1.35	1.19	1.05	
2.00				2.12	2.10	1.96	1.76	1.58	1.41	1.26	1.12	1.00	
1.00				1.73	1.79	1.76	1.62	1.46	1.31	1.18	1.06	0.95	
0.00				1.58	1.60	1.61	1.54	1.38	1.24	1.12	1.01	0.91	
-1.00				1.54	1.50	1.55	1.51	1.35	1.21	1.09	0.98	0.89	
-2.00			1.73	1.56	1.57	1.73	1.52	1.34	1.20	1.09	0.99		
-3.00		2.07	1.80	1.72	2.07	1.78	1.56	1.39	1.25	1.07			
-4.00			2.31	2.20	2.00	1.79	1.58	1.39					


2b													
	RAIL												
	LEVEL RAIL @ 90% of tipping load												
SECTOR													
10° - 40°													
OSC. AXLE													
LOCKED (Static lift only)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.00					2.88a	3.13a	2.53a						
7.00					3.77a	3.77	3.77	3.61	2.69a				
6.00					3.99	4.08	3.97	3.70	3.13	2.69			
5.00			6.46a	5.17k	4.35k	4.75	4.22	3.61	3.12	2.70	2.33		
4.00	6.65a	5.71	4.72k	6.70	5.54	4.63	3.99	3.45	3.01	2.64	2.28	1.96	
3.00			5.09	5.38	4.91	4.27	3.71	3.24	2.85	2.50	2.18	1.90	
2.00				4.17	4.15	3.87	3.42	3.02	2.68	2.36	2.08	1.82	
1.00				3.44	3.56	3.51	3.21	2.85	2.53	2.23	1.97	1.74	
0.00				3.18	3.20	3.23	3.10	2.74	2.42	2.14	1.89	1.68	
-1.00				3.11	3.01	3.13	3.05	2.68	2.37	2.09	1.85	1.65	
-2.00			3.55	3.17	3.18	3.55	3.06	2.68	2.36	2.09	1.87		
-3.00		4.30	3.70	3.51	4.31	3.63	3.13	2.74	2.44	2.04			
-4.00			4.36b	4.25b	3.91b	3.51b	3.10	2.67					

NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar). All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm
PAGE	9 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

2c													
	RAIL												
	LEVEL RAIL @ 67% of tipping load												
SECTOR													
40° to 60°													
OSC. AXLE													
FLOAT (Lift & Carry)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.00					1.95	1.92	1.94						
7.00					1.85	1.84	1.96	1.79	1.49				
6.00					1.94	1.97	1.93	1.80	1.51	1.30			
5.00			3.07	2.74	2.48	2.26	2.03	1.74	1.50	1.28	1.11		
4.00	3.13	2.71	2.43	3.01	2.56	2.19	1.89	1.64	1.42	1.24	1.07	0.92	
3.00			2.30	2.41	2.19	1.94	1.70	1.50	1.32	1.16	1.01	0.88	
2.00				1.83	1.82	1.68	1.51	1.35	1.20	1.07	0.95	0.83	
1.00				1.46	1.52	1.49	1.37	1.23	1.10	0.99	0.88	0.78	
0.00				1.32	1.34	1.35	1.29	1.15	1.03	0.93	0.83	0.74	
-1.00				1.28	1.25	1.29	1.26	1.12	1.00	0.89	0.80	0.72	
-2.00			1.45	1.30	1.30	1.45	1.26	1.12	0.99	0.89	0.81		
-3.00		1.75	1.52	1.44	1.75	1.50	1.31	1.16	1.04	0.88			
-4.00			1.96	1.87	1.70	1.51	1.33	1.16					


2c													
	RAIL												
	LEVEL RAIL @ 90% of tipping load												
SECTOR													
40° to 60°													
OSC. AXLE													
LOCKED (Static lift only)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.00					2.88a	3.13a	2.53a						
7.00					3.37	3.35	3.35	3.26a	2.64				
6.00					3.55	3.62	3.53	3.29	2.77	2.38			
5.00			5.96	5.17k	4.25k	4.20	3.74	3.20	2.77	2.36	2.02		
4.00	6.11	5.08	4.55	5.84	4.87	4.10	3.53	3.05	2.65	2.29	1.97	1.68	
3.00			4.45	4.69	4.28	3.73	3.25	2.84	2.49	2.16	1.87	1.62	
2.00				3.62	3.60	3.35	2.97	2.63	2.31	2.02	1.77	1.54	
1.00				2.96	3.07	3.02	2.76	2.45	2.15	1.90	1.67	1.46	
0.00				2.73	2.75	2.77	2.65	2.33	2.05	1.80	1.59	1.40	
-1.00				2.66	2.58	2.68	2.61	2.27	1.99	1.75	1.55	1.37	
-2.00			3.03	2.71	2.72	3.04	2.62	2.27	1.98	1.75	1.56		
-3.00		3.67	3.16	3.00	3.67	3.11	2.68	2.34	2.06	1.71			
-4.00			4.14	3.91	3.52	3.09	2.70	2.32					

NOTES	<p>Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.</p> <p>Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar).</p> <p>All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm</p>
PAGE	10 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

2d 	RAIL												
	LEVEL RAIL @ 67% of tipping load												
	SECTOR 60° - 120°												
	OSC. AXLE FLOAT (Lift & Carry)												
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					1.68	1.65	1.67						
7.0					1.58	1.58	1.69	1.53	1.24				
6.0					1.67	1.70	1.66	1.54	1.26	1.06			
5.0			2.74	2.42	2.18	1.97	1.76	1.48	1.25	1.04	0.88		
4.0	2.80	2.40	2.13	2.69	2.25	1.89	1.61	1.37	1.17	1.00	0.85	0.70	
3.0			1.98	2.08	1.87	1.63	1.42	1.23	1.06	0.92	0.79	0.66	
2.0				1.51	1.49	1.37	1.22	1.08	0.94	0.82	0.71	0.61	
1.0				1.15	1.21	1.17	1.06	0.95	0.84	0.74	0.65	0.56	
0.0				1.01	1.03	1.04	0.98	0.87	0.77	0.68	0.59	0.52	
-1.0				0.97	0.94	0.98	0.95	0.83	0.73	0.64	0.57	0.50	
-2.0			1.11	0.98	0.99	1.12	0.95	0.83	0.72	0.64	0.57		
-3.0		1.38	1.18	1.11	1.39	1.17	1.00	0.87	0.78	0.64			
-4.0			1.59	1.50	1.35	1.18	1.03	0.88					

2d 	RAIL												
	LEVEL RAIL @ 90% of tipping load												
	SECTOR 60° - 120°												
	OSC. AXLE LOCKED (Static lift only)												
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					2.88a	3.08	2.53a						
7.0					2.95	2.94	2.94	2.86	2.32				
6.0					3.11	3.18	3.10	2.88	2.38	2.01			
5.0			5.26	4.60	4.11	3.70	3.29	2.80	2.37	1.98	1.67		
4.0	5.39	4.55	4.01	5.16	4.28	3.61	3.07	2.64	2.25	1.91	1.62	1.36	
3.0			3.88	4.09	3.71	3.22	2.80	2.42	2.08	1.79	1.53	1.30	
2.0				3.10	3.07	2.84	2.52	2.19	1.90	1.65	1.42	1.22	
1.0				2.48	2.59	2.54	2.29	2.00	1.75	1.52	1.32	1.14	
0.0				2.23	2.26	2.28	2.16	1.88	1.64	1.43	1.25	1.08	
-1.0				2.16	2.09	2.18	2.12	1.82	1.58	1.38	1.20	1.06	
-2.0			2.52	2.21	2.21	2.52	2.13	1.82	1.58	1.38	1.22		
-3.0		3.07	2.63	2.49	3.08	2.59	2.19	1.88	1.65	1.35			
-4.0			3.49	3.29	2.95	2.59	2.22	1.88					

NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar). All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm
PAGE	11 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

2e													
	RAIL												
	LEVEL RAIL @ 67% of tipping load												
SECTOR													
120° - 130°													
OSC. AXLE													
FLOAT (Lift & Carry)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					2.07	2.04	2.06						
7.0					1.97	1.96	2.09	1.91	1.61				
6.0					2.06	2.10	2.05	1.92	1.62	1.41			
5.0			3.22	2.88	2.62	2.39	2.16	1.86	1.61	1.39	1.21		
4.0	3.28	2.85	2.57	3.16	2.70	2.33	2.02	1.76	1.54	1.35	1.18	1.02	
3.0			2.45	2.56	2.34	2.08	1.84	1.62	1.43	1.27	1.12	0.98	
2.0				1.98	1.96	1.83	1.65	1.48	1.32	1.18	1.05	0.93	
1.0				1.61	1.67	1.64	1.51	1.36	1.22	1.10	0.99	0.88	
0.0				1.47	1.48	1.49	1.43	1.28	1.15	1.04	0.94	0.84	
-1.0				1.42	1.39	1.44	1.40	1.25	1.12	1.01	0.91	0.83	
-2.0			1.60	1.45	1.45	1.60	1.41	1.25	1.12	1.01	0.92		
-3.0		1.91	1.67	1.59	1.92	1.65	1.45	1.29	1.17	0.99			
-4.0			2.13	2.03	1.86	1.66	1.47	1.29					


2e													
	RAIL												
	LEVEL RAIL @ 90% of tipping load												
SECTOR													
120° - 130°													
OSC. AXLE													
LOCKED (Static lift only)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					2.88a	3.13a	2.53a						
7.0					3.77a	3.89	3.88	3.65	2.69a				
6.0					4.10	4.19	4.08	3.83	3.29	2.88			
5.0			6.46a	5.17k	4.43	4.82	4.32	3.75	3.29	2.89	2.57		
4.0	6.65a	5.72	4.72k	6.61	5.57	4.74	4.13	3.62	3.20	2.84	2.53	2.25	
3.0			5.19	5.46	5.04	4.44	3.90	3.45	3.07	2.74	2.46	2.21	
2.0				4.39	4.37	4.12	3.67	3.27	2.93	2.63	2.38	2.15	
1.0				3.72	3.83	3.79	3.50	3.13	2.81	2.54	2.30	2.09	
0.0				3.49	3.50	3.53	3.41	3.04	2.73	2.47	2.24	2.04	
-1.0				3.43	3.33	3.45	3.38	3.00	2.69	2.43	2.21	2.02	
-2.0			3.88	3.50	3.50	3.87	3.39	3.00	2.69	2.43	2.22		
-3.0		4.59	4.01	3.83	4.59	3.93	3.44	3.05	2.74	2.38			
-4.0			4.36b	4.34b	4.07	3.69	3.28	2.84b					

NOTES	<p>Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.</p> <p>Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar).</p> <p>All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm</p>
PAGE	12 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

2f													
	RAIL												
	LEVEL RAIL @ 67% of tipping load												
SECTOR													
130° - 140°													
OSC. AXLE													
FLOAT (Lift & Carry)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					2.31	2.28	2.31						
7.0					2.20	2.19	2.33	2.14	1.82				
6.0					2.30	2.35	2.29	2.15	1.83	1.60			
5.0			3.58	3.21	2.92	2.67	2.41	2.09	1.82	1.59	1.39		
4.0	3.65	3.18	2.86	3.52	3.01	2.61	2.27	1.99	1.75	1.54	1.36	1.19	
3.0			2.76	2.88	2.65	2.35	2.08	1.85	1.64	1.46	1.30	1.15	
2.0				2.26	2.25	2.10	1.90	1.70	1.53	1.37	1.23	1.10	
1.0				1.87	1.93	1.90	1.76	1.59	1.43	1.29	1.17	1.05	
0.0				1.72	1.74	1.75	1.68	1.51	1.36	1.23	1.12	1.01	
-1.0				1.68	1.63	1.69	1.65	1.48	1.33	1.20	1.09	0.99	
-2.0			1.88	1.71	1.71	1.88	1.66	1.47	1.33	1.20	1.10		
-3.0		2.23	1.96	1.87	2.23	1.93	1.70	1.51	1.37	1.18			
-4.0			2.47	2.36	2.16	1.93	1.72	1.51					


2f													
	RAIL												
	LEVEL RAIL @ 90% of tipping load												
SECTOR													
130° - 140°													
OSC. AXLE													
LOCKED (Static lift only)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					2.88a	3.13a	2.53a						
7.0					3.77a	4.04a	4.02a	3.69a	2.69a				
6.0					4.44a	4.51a	4.42a	4.17a	3.63	3.19			
5.0			6.46a	5.17k	4.79k	5.09a	4.69a	4.13	3.64	3.20	2.86		
4.0	6.65a	6.21	4.72k	7.24	6.11	5.18	4.55	4.00	3.54	3.15	2.82	2.52	
3.0			5.72	6.01	5.57	4.91	4.32	3.83	3.41	3.05	2.75	2.48	
2.0				4.87	4.85	4.59	4.09	3.65	3.27	2.95	2.67	2.42	
1.0				4.16	4.28	4.24	3.92	3.51	3.16	2.85	2.59	2.36	
0.0				3.92	3.93	3.96	3.83	3.42	3.08	2.78	2.53	2.31	
-1.0				3.86	3.74	3.88	3.80	3.38	3.03	2.75	2.50	2.29	
-2.0			4.35	3.93	3.94	4.35	3.81	3.38	3.03	2.75	2.51		
-3.0		5.09b	4.49	4.30	5.08	4.41	3.86	3.42	3.08	2.69			
-4.0			4.36b	4.37b	4.21b	3.90	3.48b	2.84b					

NOTES	<p>Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.</p> <p>Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar).</p> <p>All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm</p>
PAGE	13 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

2g													
	RAIL												
	LEVEL RAIL @ 67% of tipping load												
SECTOR													
140° - 160°													
OSC. AXLE													
FLOAT (Lift & Carry)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					2.74	2.70	2.53a						
7.0					2.61	2.60	2.75a	2.54	2.19				
6.0					2.73	2.78	2.72	2.56	2.20	1.94			
5.0			4.21	3.78	3.45	3.16	2.86	2.50	2.20	1.93	1.71		
4.0	4.30	3.75	3.38	4.15	3.57	3.10	2.71	2.39	2.12	1.88	1.68	1.49	
3.0			3.30	3.45	3.19	2.84	2.53	2.25	2.01	1.80	1.62	1.45	
2.0				2.77	2.75	2.59	2.34	2.11	1.90	1.72	1.55	1.40	
1.0				2.33	2.40	2.37	2.20	1.99	1.80	1.64	1.48	1.35	
0.0				2.17	2.19	2.20	2.13	1.92	1.74	1.58	1.44	1.31	
-1.0				2.13	2.07	2.14	2.10	1.88	1.70	1.54	1.41	1.29	
-2.0			2.38	2.17	2.17	2.38	2.10	1.88	1.70	1.54	1.42		
-3.0		2.79	2.46	2.36	2.79	2.43	2.14	1.92	1.74	1.52			
-4.0			3.08	2.94	2.69	2.42	2.16	1.91					

2g													
	RAIL												
	LEVEL RAIL @ 90% of tipping load												
SECTOR													
140° - 160°													
OSC. AXLE													
LOCKED (Static lift only)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					2.88a	3.13a	2.53a						
7.0					3.77a	4.04a	4.02a	3.69a	2.69a				
6.0					4.44a	4.51a	4.47a	4.35a	4.06a	3.40a			
5.0			6.46a	5.17k	5.31	5.38a	5.08	4.74	4.25	3.76	3.37		
4.0	6.65a	7.15	4.72k	7.34a	7.14	6.08	5.28	4.69	4.15	3.71	3.32	2.99	
3.0			6.74	7.09	6.57	5.80	5.09	4.51	4.02	3.61	3.25	2.94	
2.0				5.78	5.76	5.48	4.86	4.33	3.88	3.50	3.17	2.88	
1.0				4.97	5.11	5.06	4.69	4.19	3.76	3.40	3.09	2.82	
0.0				4.70	4.70	4.74	4.60	4.10	3.68	3.33	3.03	2.77	
-1.0				4.63	4.49	4.66	4.56	4.05	3.64	3.29	3.00	2.75	
-2.0			5.23	4.73	4.73	5.23	4.57	4.05	3.64	3.29	3.01		
-3.0		5.09b	5.40	5.16	5.65	5.19	4.60	4.09	3.68	3.20a			
-4.0			4.36b	4.37b	4.21b	3.93b	3.52b	2.84b					

NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar).
	All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm
PAGE	14 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

2h													
	RAIL												
	LEVEL RAIL @ 67% of tipping load												
SECTOR													
160° - 180°													
OSC. AXLE													
FLOAT (Lift & Carry)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					2.88a	3.13a	2.53a						
7.0					3.77a	4.04a	4.02a	3.69a	2.69a				
6.0					4.44a	4.51a	4.47a	4.32a	3.99	3.40a			
5.0			6.46a	5.17k	4.98	5.28	4.93a	4.53	4.00	3.55	3.19		
4.0	6.65a	6.67	4.72k	7.34a	6.65	5.68	4.99	4.41	3.92	3.51	3.15	2.84	
3.0			6.28	6.59	6.13	5.43	4.78	4.25	3.80	3.42	3.09	2.80	
2.0				5.41	5.40	5.14	4.57	4.09	3.67	3.32	3.01	2.74	
1.0				4.68	4.81	4.77	4.42	3.96	3.57	3.24	2.95	2.69	
0.0				4.44	4.44	4.48	4.34	3.88	3.50	3.17	2.89	2.65	
-1.0				4.38	4.25	4.40	4.31	3.84	3.46	3.14	2.87	2.63	
-2.0			4.93	4.46	4.47	4.92	4.32	3.84	3.46	3.14	2.88		
-3.0		5.09b	5.08	4.87	5.30	4.96	4.37	3.88	3.50	3.07			
-4.0			4.36b	4.37b	4.21b	3.93b	3.52b	2.84b					


2h													
	RAIL												
	LEVEL RAIL @ 90% of tipping load												
SECTOR													
160° - 180°													
OSC. AXLE													
LOCKED (Static lift only)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					2.88a	3.13a	2.53a						
7.0					3.77a	4.04a	4.02a	3.69a	2.69a				
6.0					4.44a	4.51a	4.47a	4.35a	4.06a	3.40a			
5.0			6.46a	5.17k	5.36a	5.42a	5.22	4.92a	4.54	4.06	3.58a		
4.0	6.65a	7.38a	4.72k	7.34a	7.54	6.44	5.33a	5.03	4.47	4.01	3.60	3.24	
3.0			7.16	7.52	7.00	6.20	5.46	4.85	4.34	3.91	3.54	3.21	
2.0				6.19	6.17	5.88	5.23	4.68	4.21	3.80	3.45	3.15	
1.0				5.36	5.50	5.46	5.07	4.54	4.09	3.71	3.38	3.09	
0.0				5.09	5.09	5.13	4.98	4.45	4.01	3.64	3.32	3.04	
-1.0				5.02	4.87	5.05	4.95	4.41	3.97	3.60	3.29	3.02	
-2.0			5.65	5.12	5.12	5.64	4.95	4.41	3.97	3.60	3.30		
-3.0		5.09b	5.45b	5.58	5.92b	5.46	4.92	4.41	3.95	3.20a			
-4.0			4.36b	4.37b	4.21b	3.93b	3.52b	2.84b					

NOTES	<p>Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.</p> <p>Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar).</p> <p>All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm</p>
PAGE	15 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

3a													
	RAIL												
	50-150mm CANT @ 67% of tipping												
SECTOR													
+/-10° Over Float Axle													
OSC. AXLE													
FLOAT (Lift & Carry)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					2.62	2.57	2.52						
7.0					2.47	2.46	2.64	2.40	2.02				
6.0					2.60	2.66	2.59	2.42	2.04	1.77			
5.0			4.29	3.78	3.40	3.07	2.74	2.35	2.04	1.76	1.53		
4.0	4.39	3.74	3.32	4.21	3.53	3.00	2.58	2.24	1.95	1.71	1.50	1.31	
3.0			3.23	3.40	3.10	2.72	2.38	2.08	1.84	1.62	1.43	1.26	
2.0				2.63	2.61	2.43	2.17	1.93	1.71	1.53	1.36	1.21	
1.0				2.15	2.23	2.20	2.01	1.80	1.61	1.44	1.29	1.16	
0.0				1.98	2.00	2.01	1.93	1.72	1.53	1.38	1.24	1.12	
-1.0				1.93	1.88	1.95	1.90	1.68	1.50	1.34	1.21	1.10	
-2.0			2.20	1.97	1.97	2.20	1.91	1.68	1.49	1.34	1.22		
-3.0		2.64	2.29	2.17	2.65	2.25	1.95	1.72	1.55	1.32			
-4.0			2.98	2.82	2.54	2.25	1.97	1.71					


3a													
	RAIL												
	50-150mm CANT @ 90% of tipping												
SECTOR													
+/-10° Over Float Axle													
OSC. AXLE													
LOCKED (Static lift only)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					2.88a	3.13a	2.53a						
7.0					3.77a	4.04a	4.02a	3.69a	2.69a				
6.0					4.44a	4.51a	4.46a	4.30a	3.78	3.27			
5.0			6.46a	5.17k	4.82	5.25a	4.86	4.35	3.78	3.29	2.90		
4.0	6.65a	6.70	4.72k	7.34a	6.68	5.57	4.83	4.19	3.66	3.22	2.84	2.51	
3.0			6.21	6.56	6.01	5.22	4.53	3.96	3.50	3.10	2.76	2.44	
2.0				5.16	5.13	4.82	4.24	3.75	3.33	2.97	2.66	2.36	
1.0				4.30	4.45	4.40	4.03	3.57	3.18	2.85	2.56	2.28	
0.0				4.01	4.03	4.06	3.91	3.46	3.08	2.76	2.48	2.22	
-1.0				3.94	3.81	3.96	3.87	3.40	3.03	2.71	2.44	2.19	
-2.0			4.50	4.02	4.03	4.50	3.88	3.40	3.02	2.71	2.45		
-3.0		5.09b	4.67	4.44	5.26b	4.58	3.94	3.46	3.09	2.65			
-4.0			4.36b	4.37b	4.21b	3.93b	3.52	2.84b					

NOTES	<p>Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.</p> <p>Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar).</p> <p>All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm</p>
PAGE	16 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

3b														
	RAIL													
	50-150mm CANT @ 67% of tipping													
SECTOR														
10° - 40°														
OSC. AXLE														
FLOAT (Lift & Carry)														
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	
8.00					1.85	1.82	1.84							
7.00					1.75	1.74	1.86	1.70	1.41					
6.00					1.84	1.87	1.83	1.71	1.43	1.23				
5.00			2.88	2.58	2.34	2.14	1.93	1.65	1.42	1.21	1.04			
4.00	2.94	2.56	2.29	2.84	2.41	2.07	1.79	1.55	1.34	1.17	1.01	0.87		
3.00			2.16	2.26	2.06	1.82	1.60	1.41	1.24	1.09	0.95	0.83		
2.00				1.71	1.70	1.57	1.42	1.27	1.13	1.00	0.88	0.78		
1.00				1.36	1.42	1.39	1.27	1.15	1.03	0.92	0.82	0.73		
0.00				1.23	1.25	1.25	1.19	1.07	0.96	0.86	0.77	0.69		
-1.00				1.19	1.16	1.20	1.17	1.03	0.92	0.83	0.74	0.67		
-2.00			1.34	1.21	1.21	1.34	1.17	1.03	0.92	0.83	0.75			
-3.00		1.62	1.41	1.33	1.63	1.39	1.21	1.08	0.97	0.82				
-4.00			1.82	1.73	1.58	1.40	1.24	1.08						


3b														
	RAIL													
	50-150mm CANT @ 90% of tipping													
SECTOR														
10° - 40°														
OSC. AXLE														
LOCKED (Static lift only)														
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	
8.00					2.88a	3.13a	2.53a							
7.00					3.05	3.03	3.03	2.96	2.40					
6.00					3.22	3.29	3.20	2.98	2.46	2.07				
5.00			5.51	4.80	4.25k	3.83	3.40	2.89	2.45	2.05	1.73			
4.00	5.65	4.67	4.17	5.40	4.46	3.74	3.18	2.73	2.33	1.98	1.68	1.41		
3.00			4.04	4.27	3.86	3.35	2.90	2.51	2.16	1.85	1.58	1.35		
2.00				3.22	3.20	2.96	2.62	2.28	1.97	1.71	1.48	1.27		
1.00				2.59	2.69	2.64	2.39	2.08	1.82	1.58	1.38	1.19		
0.00				2.34	2.36	2.38	2.26	1.96	1.71	1.49	1.30	1.13		
-1.00				2.26	2.18	2.29	2.22	1.90	1.65	1.44	1.25	1.10		
-2.00			2.63	2.32	2.32	2.63	2.23	1.90	1.64	1.43	1.27			
-3.00		3.22	2.75	2.60	3.23	2.71	2.29	1.97	1.72	1.41				
-4.00			3.67	3.45	3.09	2.70	2.32	1.96						

NOTES	<p>Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.</p> <p>Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar).</p> <p>All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm</p>
PAGE	17 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

3c													
	RAIL												
	50-150mm CANT @ 67% of tipping												
SECTOR													
40° to 60°													
OSC. AXLE													
FLOAT (Lift & Carry)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.00					1.70	1.67	1.69						
7.00					1.61	1.61	1.72	1.56	1.29				
6.00					1.69	1.73	1.68	1.57	1.31	1.11			
5.00			2.67	2.39	2.17	1.97	1.78	1.51	1.29	1.10	0.94		
4.00	2.73	2.36	2.12	2.63	2.23	1.90	1.64	1.41	1.22	1.05	0.90	0.77	
3.00			1.98	2.07	1.88	1.66	1.46	1.28	1.12	0.97	0.85	0.73	
2.00				1.54	1.53	1.41	1.27	1.13	1.00	0.89	0.78	0.68	
1.00				1.21	1.26	1.23	1.13	1.01	0.91	0.81	0.71	0.63	
0.00				1.08	1.10	1.10	1.05	0.93	0.84	0.75	0.66	0.59	
-1.00				1.03	1.01	1.05	1.02	0.90	0.80	0.71	0.64	0.57	
-2.00			1.18	1.05	1.05	1.18	1.02	0.90	0.80	0.71	0.64		
-3.00		1.43	1.24	1.17	1.44	1.23	1.06	0.94	0.85	0.71			
-4.00			1.62	1.54	1.40	1.24	1.09	0.95					


3c													
	RAIL												
	50-150mm CANT @ 90% of tipping												
SECTOR													
40° to 60°													
OSC. AXLE													
LOCKED (Static lift only)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.00					2.88a	3.05	2.53a						
7.00					2.92	2.91	2.91	2.83	2.29				
6.00					3.09	3.17	3.07	2.85	2.32	1.92			
5.00			5.48	4.73	4.18	3.72	3.28	2.75	2.30	1.90	1.58		
4.00	5.64	4.66k	4.06	5.36	4.36	3.62	3.05	2.59	2.17	1.83	1.53	1.26	
3.00			3.92	4.16	3.74	3.21	2.76	2.35	2.00	1.70	1.43	1.20	
2.00				3.07	3.05	2.80	2.45	2.11	1.81	1.55	1.32	1.12	
1.00				2.40	2.52	2.47	2.20	1.90	1.65	1.42	1.22	1.04	
0.00				2.14	2.17	2.19	2.07	1.78	1.53	1.32	1.14	0.97	
-1.00				2.07	1.99	2.09	2.02	1.71	1.47	1.26	1.09	0.94	
-2.00			2.45	2.12	2.12	2.45	2.03	1.71	1.46	1.26	1.11		
-3.00		3.05	2.57	2.41	3.06	2.53	2.10	1.78	1.55	1.24			
-4.00			3.51	3.29	2.92	2.53	2.14	1.78					

NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar). All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm
PAGE	18 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

3d													
	RAIL												
	50-150mm CANT @ 67% of tipping												
SECTOR													
60° - 120°													
OSC. AXLE													
FLOAT (Lift & Carry)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					1.51	1.48	1.50						
7.0					1.42	1.42	1.53	1.37	1.10				
6.0					1.50	1.53	1.49	1.38	1.12	0.92			
5.0			2.50	2.20	1.98	1.78	1.58	1.32	1.10	0.91	0.75		
4.0	2.56	2.18	1.93	2.45	2.04	1.70	1.43	1.21	1.03	0.86	0.72	0.59	
3.0			1.77	1.86	1.66	1.44	1.24	1.07	0.91	0.78	0.66	0.54	
2.0				1.31	1.29	1.18	1.05	0.92	0.80	0.69	0.59	0.49	
1.0				0.96	1.02	0.99	0.89	0.79	0.69	0.60	0.52	0.42	
0.0				0.83	0.85	0.85	0.80	0.70	0.62	0.54	0.46	0.36	
-1.0				0.78	0.76	0.80	0.77	0.66	0.58	0.50	0.42	0.33	
-2.0			0.91	0.80	0.80	0.92	0.77	0.66	0.57	0.50	0.43		
-3.0		1.16	0.97	0.91	1.17	0.97	0.82	0.71	0.63	0.50			
-4.0			1.34	1.27	1.13	0.99	0.85	0.72					


3d													
	RAIL												
	50-150mm CANT @ 90% of tipping												
SECTOR													
60° - 120°													
OSC. AXLE													
LOCKED (Static lift only)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					2.85	2.80	2.53a						
7.0					2.69	2.67	2.75a	2.59	2.09				
6.0					2.83	2.90	2.82	2.62	2.11	1.75			
5.0			4.85	4.23	3.77	3.38	2.99	2.52	2.10	1.73	1.44		
4.0	4.97	4.18	3.67	4.75	3.92	3.28	2.78	2.35	1.98	1.66	1.39	1.14	
3.0			3.51	3.71	3.35	2.90	2.49	2.12	1.81	1.53	1.29	1.08	
2.0				2.76	2.73	2.51	2.19	1.89	1.63	1.39	1.19	1.00	
1.0				2.13	2.23	2.18	1.95	1.70	1.47	1.27	1.09	0.92	
0.0				1.89	1.92	1.94	1.83	1.57	1.36	1.17	1.01	0.86	
-1.0				1.82	1.76	1.84	1.78	1.51	1.30	1.12	0.96	0.83	
-2.0			2.14	1.86	1.87	2.14	1.79	1.51	1.30	1.12	0.98		
-3.0		2.69	2.26	2.12	2.70	2.22	1.86	1.58	1.38	1.10			
-4.0			3.08	2.90	2.59	2.23	1.89	1.58					

NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar). All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm
PAGE	19 Of 24



25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

3e													
	RAIL												
	50-150mm CANT @ 67% of tipping												
SECTOR													
120° - 130°													
OSC. AXLE													
FLOAT (Lift & Carry)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					1.74	1.72	1.73						
7.0					1.65	1.65	1.76	1.60	1.32				
6.0					1.73	1.77	1.73	1.61	1.34	1.14			
5.0			2.73	2.44	2.22	2.02	1.82	1.55	1.33	1.13	0.97		
4.0	2.79	2.42	2.17	2.69	2.28	1.95	1.68	1.45	1.26	1.09	0.94	0.80	
3.0			2.03	2.13	1.93	1.71	1.50	1.32	1.15	1.01	0.88	0.76	
2.0				1.59	1.58	1.46	1.31	1.17	1.04	0.92	0.81	0.71	
1.0				1.25	1.31	1.28	1.17	1.05	0.94	0.84	0.75	0.66	
0.0				1.12	1.14	1.15	1.09	0.97	0.87	0.78	0.70	0.62	
-1.0				1.08	1.05	1.09	1.06	0.94	0.83	0.75	0.67	0.60	
-2.0			1.23	1.10	1.10	1.23	1.07	0.94	0.83	0.75	0.68		
-3.0		1.49	1.28	1.22	1.49	1.28	1.11	0.98	0.88	0.74			
-4.0			1.68	1.59	1.45	1.29	1.14	0.99					


3e													
	ROAD												
	50-150mm CANT @ 75% of tipping												
SECTOR													
120° - 130°													
OSC. AXLE													
LOCKED (Static lift only)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					2.88a	3.13a	2.53a						
7.0					3.46	3.44	3.44	3.30	2.69a				
6.0					3.64	3.71	3.62	3.38	2.86	2.48			
5.0			6.02	5.17k	4.25k	4.29	3.83	3.29	2.86	2.46	2.12		
4.0	6.16	5.16	4.64	5.91	4.95	4.19	3.62	3.14	2.75	2.39	2.06	1.77	
3.0			4.54	4.78	4.37	3.83	3.35	2.94	2.60	2.26	1.97	1.71	
2.0				3.73	3.70	3.46	3.08	2.73	2.42	2.13	1.87	1.64	
1.0				3.07	3.18	3.13	2.87	2.57	2.27	2.00	1.77	1.56	
0.0				2.84	2.86	2.88	2.77	2.45	2.16	1.91	1.69	1.50	
-1.0				2.77	2.69	2.79	2.73	2.39	2.10	1.86	1.65	1.47	
-2.0			3.15	2.83	2.83	3.15	2.73	2.39	2.10	1.86	1.67		
-3.0		3.78	3.28	3.12	3.79	3.22	2.79	2.45	2.17	1.82			
-4.0			4.25	4.02	3.63	3.21	2.81	2.44					

NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar).
	All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm
PAGE	20 Of 24





25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

3f													
	RAIL												
	50-150mm CANT @ 67% of tipping												
SECTOR													
130° - 140°													
OSC. AXLE													
FLOAT (Lift & Carry)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					1.88	1.85	1.87						
7.0					1.79	1.78	1.90	1.73	1.44				
6.0					1.87	1.91	1.86	1.74	1.46	1.25			
5.0			2.94	2.63	2.39	2.18	1.96	1.68	1.45	1.24	1.07		
4.0	3.00	2.60	2.34	2.89	2.46	2.11	1.82	1.58	1.38	1.20	1.04	0.89	
3.0			2.21	2.31	2.11	1.86	1.64	1.44	1.27	1.12	0.98	0.85	
2.0				1.76	1.74	1.62	1.46	1.30	1.16	1.03	0.91	0.80	
1.0				1.40	1.46	1.43	1.31	1.18	1.06	0.95	0.85	0.75	
0.0				1.27	1.29	1.29	1.23	1.10	0.99	0.89	0.80	0.71	
-1.0				1.22	1.19	1.24	1.20	1.07	0.95	0.86	0.77	0.70	
-2.0			1.39	1.25	1.25	1.39	1.21	1.07	0.95	0.86	0.78		
-3.0		1.67	1.45	1.38	1.67	1.43	1.25	1.11	1.00	0.85			
-4.0			1.87	1.78	1.62	1.45	1.28	1.12					

3f													
	RAIL												
	50-150mm CANT @ 90% of tipping												
SECTOR													
130° - 140°													
OSC. AXLE													
LOCKED (Static lift only)													
	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.0	6.5	7.0	7.5	8.0
8.00					2.88a	3.13a	2.53a						
7.00					3.77a	3.99	3.98	3.69a	2.69a				
6.00					4.24	4.34	4.21	3.91	3.29	2.81			
5.00			6.46a	5.17k	4.61	5.00a	4.49	3.82	3.28	2.82	2.45		
4.00	6.65a	6.14	4.72k	7.34a	6.02	4.98	4.25	3.65	3.16	2.76	2.39	2.05	
3.00			5.52	5.86	5.32	4.58	3.95	3.43	3.00	2.63	2.29	1.99	
2.00				4.49	4.47	4.16	3.64	3.20	2.82	2.49	2.18	1.90	
1.00				3.67	3.81	3.76	3.42	3.01	2.67	2.35	2.07	1.82	
0.00				3.39	3.41	3.44	3.30	2.90	2.56	2.26	1.99	1.76	
-1.00				3.32	3.21	3.34	3.26	2.84	2.51	2.20	1.95	1.73	
-2.00			3.82	3.39	3.40	3.82	3.27	2.84	2.50	2.20	1.96		
-3.00		4.68	3.99	3.77	4.69	3.90	3.33	2.90	2.58	2.15			
-4.0			4.36b	4.35	4.07	3.66b	3.24	2.75					

NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar). All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm
PAGE	21 Of 24



25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

3g													
	RAIL												
	50-150mm CANT @ 67% of tipping												
SECTOR													
140° - 160°													
OSC. AXLE													
FLOAT (Lift & Carry)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					2.17	2.14	2.16						
7.0					2.06	2.05	2.19	2.00	1.69				
6.0					2.16	2.20	2.15	2.01	1.71	1.48			
5.0			3.36	3.01	2.74	2.50	2.26	1.96	1.70	1.47	1.28		
4.0	3.43	2.98	2.68	3.31	2.83	2.44	2.12	1.85	1.62	1.43	1.25	1.09	
3.0			2.57	2.69	2.47	2.19	1.94	1.71	1.52	1.35	1.19	1.05	
2.0				2.09	2.08	1.94	1.75	1.57	1.41	1.26	1.12	1.00	
1.0				1.71	1.77	1.74	1.61	1.45	1.31	1.18	1.06	0.95	
0.0				1.57	1.59	1.60	1.53	1.37	1.24	1.12	1.01	0.91	
-1.0				1.53	1.49	1.54	1.50	1.34	1.20	1.09	0.98	0.89	
-2.0			1.72	1.55	1.55	1.72	1.51	1.34	1.20	1.08	0.99		
-3.0		2.04	1.79	1.70	2.04	1.77	1.55	1.38	1.25	1.07			
-4.0			2.27	2.17	1.98	1.77	1.57	1.38					


3g													
	ROAD												
	50-150mm CANT @ 75% of tipping												
SECTOR													
140° - 160°													
OSC. AXLE													
LOCKED (Static lift only)													
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					2.88a	3.13a	2.53a						
7.0					3.77a	4.04a	4.02a	3.69a	2.69a				
6.0					4.44a	4.51a	4.43	4.20	3.69	3.26			
5.0			6.46a	5.17k	4.79k	5.09a	4.72	4.18	3.70	3.28	2.94		
4.0	6.65a	6.17	4.72k	7.13	6.07	5.20	4.59	4.06	3.61	3.23	2.90	2.61	
3.0			5.71	5.98	5.56	4.94	4.37	3.89	3.48	3.13	2.83	2.56	
2.0				4.90	4.88	4.63	4.15	3.72	3.35	3.03	2.75	2.50	
1.0				4.21	4.33	4.29	3.99	3.58	3.24	2.94	2.68	2.44	
0.0				3.98	3.99	4.02	3.90	3.50	3.16	2.87	2.62	2.40	
-1.0				3.93	3.81	3.95	3.87	3.46	3.12	2.83	2.59	2.38	
-2.0			4.40	4.00	4.00	4.40	3.88	3.46	3.12	2.83	2.60		
-3.0		5.09b	4.54	4.35	5.10	4.46	3.92	3.50	3.17	2.77			
-4.0			4.36b	4.37b	4.21b	3.93b	3.52b	2.84b					

NOTES	Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.
	Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar).
	All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm
PAGE	22 Of 24



25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

3h			RAIL		50-150mm CANT @ 67% of tipping								
			SECTOR		160° - 180°								
			OSC. AXLE		FLOAT (Lift & Carry)								
	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0					2.88a	3.13a	2.53a						
7.0					3.77a	4.04a	4.02a	3.69a	2.69a				
6.0					4.44a	4.51a	4.42a	4.17a	3.71	3.31			
5.0			6.46a	5.17k	4.79k	5.02	4.67	4.16	3.72	3.33	3.01		
4.0	6.65a	5.96	4.72k	6.73	5.83	5.07	4.53	4.05	3.64	3.29	2.98	2.71	
3.0			5.52	5.76	5.40	4.85	4.34	3.91	3.53	3.21	2.92	2.67	
2.0				4.83	4.81	4.60	4.16	3.76	3.42	3.12	2.85	2.61	
1.0				4.23	4.33	4.30	4.02	3.65	3.32	3.04	2.79	2.56	
0.0				4.03	4.03	4.06	3.95	3.57	3.26	2.98	2.74	2.53	
-1.0				3.98	3.87	3.99	3.92	3.54	3.22	2.95	2.71	2.51	
-2.0			4.41	4.04	4.05	4.41	3.93	3.54	3.22	2.95	2.72		
-3.0		5.07	4.53	4.36	5.06	4.45	3.97	3.58	3.26	2.89			
-4.0			4.36b	4.37b	4.21b	3.93b	3.52b	2.84b					


3h			RAIL		50-150mm CANT @ 90% of tipping								
			SECTOR		160° - 180°								
			OSC. AXLE		LOCKED (Static lift only)								
	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.0	6.5	7.0	7.5	8.0
8.00					2.88a	3.13a	2.53a						
7.00					3.77a	4.04a	4.02a	3.69a	2.69a				
6.00					4.44a	4.51a	4.47a	4.35a	4.06a	3.40a			
5.00			6.46a	5.17k	5.36a	5.42a	5.22	4.92a	4.54	4.06	3.58a		
4.00	6.65a	7.38a	4.72k	7.34a	7.54	6.44	5.33a	5.03	4.47	4.01	3.60	3.24	
3.00			7.16	7.52	7.00	6.20	5.46	4.85	4.34	3.91	3.54	3.21	
2.00				6.19	6.17	5.88	5.23	4.68	4.21	3.80	3.45	3.15	
1.00				5.36	5.50	5.46	5.07	4.54	4.09	3.71	3.38	3.09	
0.00				5.09	5.09	5.13	4.98	4.45	4.01	3.64	3.32	3.04	
-1.00				5.02	4.87	5.05	4.95	4.41	3.97	3.60	3.29	3.02	
-2.00			5.65	5.12	5.12	5.64	4.95	4.41	3.97	3.60	3.30		
-3.00		5.09b	5.45b	5.58	5.92b	5.46	4.92	4.41	3.95	3.20a			
-4.0			4.36b	4.37b	4.21b	3.93b	3.52b	2.84b					

NOTES	<p>Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.</p> <p>Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar).</p> <p>All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm</p>
PAGE	23 Of 24



25 Benson Rd, Nuffield Industrial Estate
 Poole, Dorset. BH17 0GB
 Tel: 01202 681190
 Fax: 01202 677909
 E-mail: info@prolec.co.uk

MACHINE TYPE	Komatsu PW160-7
SERIAL No	H55920
FLEET ASSET NUMBER	99709 910045-2
EQUIPMENT	5m15+2m10
LIFT MODE	Standard / Tool Pin
DATE	29/06/2015



This machine is equipped with a Prolec PME RCI. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530 ISSUE 5

4		RAIL		150-177mm CANT @ 67% of tipping										
		SECTOR		360°										
		OSC. AXLE		FLOAT (Lift & Carry)										
		2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
8.0						1.37	1.35	1.36						
7.0						1.29	1.29	1.39	1.24	0.99				
6.0						1.36	1.39	1.36	1.26	1.01	0.82			
5.0				2.26	1.99	1.79	1.61	1.44	1.19	0.99	0.81	0.66		
4.0		2.31	1.97	1.75	2.22	1.84	1.54	1.29	1.09	0.91	0.76	0.63	0.50	
3.0				1.58	1.67	1.48	1.29	1.11	0.95	0.81	0.68	0.57	0.44	
2.0					1.15	1.13	1.03	0.91	0.80	0.69	0.59	0.50	0.37	
1.0					0.82	0.87	0.84	0.76	0.67	0.59	0.51	0.41	0.30	
0.0					0.69	0.72	0.72	0.67	0.59	0.51	0.43	0.33	0.24	
-1.0					0.65	0.63	0.66	0.64	0.55	0.47	0.38	0.29	0.21	
-2.0				0.76	0.66	0.66	0.77	0.64	0.55	0.47	0.38	0.30		
-3.0			0.98	0.82	0.76	0.99	0.82	0.69	0.60	0.52	0.38			
-4.0				1.15	1.08	0.97	0.84	0.72	0.61					

4		RAIL		150-177mm CANT @ 67% of tipping										
		SECTOR		360°										
		OSC. AXLE		LOCKED (Static lift only)										
		2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.0	6.5	7.0	7.5	8.0
8.00						1.98	1.95	1.97						
7.00						1.88	1.87	2.00	1.82	1.51				
6.00						1.97	2.01	1.96	1.83	1.53	1.31			
5.00				3.10	2.77	2.51	2.29	2.07	1.77	1.52	1.29	1.11		
4.00		3.16	2.74	2.46	3.04	2.59	2.22	1.91	1.65	1.43	1.24	1.07	0.91	
3.00				2.31	2.42	2.20	1.94	1.71	1.50	1.32	1.16	1.01	0.87	
2.00					1.82	1.81	1.67	1.51	1.34	1.20	1.06	0.93	0.82	
1.00					1.44	1.50	1.47	1.35	1.21	1.09	0.97	0.86	0.76	
0.00					1.29	1.32	1.32	1.26	1.13	1.01	0.90	0.81	0.70	
-1.00					1.25	1.22	1.26	1.23	1.09	0.97	0.87	0.78	0.67	
-2.00				1.42	1.27	1.27	1.42	1.23	1.09	0.97	0.87	0.79		
-3.00			1.71	1.48	1.41	1.72	1.47	1.28	1.13	1.02	0.86			
-4.0				1.93	1.83	1.67	1.48	1.31	1.14					

NOTES

Radius/height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the bucket pin with no other equipment attached.

Loads marked 'b' boom and 'a' arm are limited by hydraulic capacity (87% of 355 bar).

All rail duties listed are valid for use on up to a 1:29 gradient, and with a maximum track twist of 27mm