

ROADRAILER


by REXQUOTE

e-mail: sales@rexquote.co.uk

Web: www.rexquote.co.uk


TEL:01823 433398

Oscillating Axle

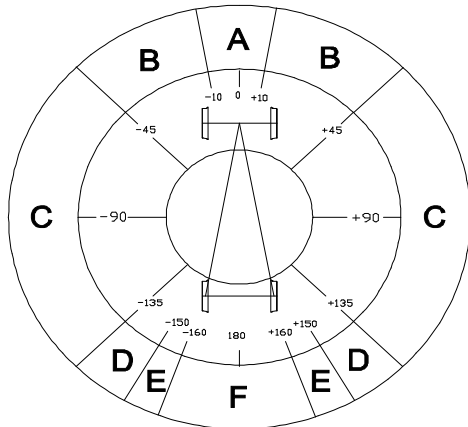


Fixed Axle
Road Duties

Oscillating Axle

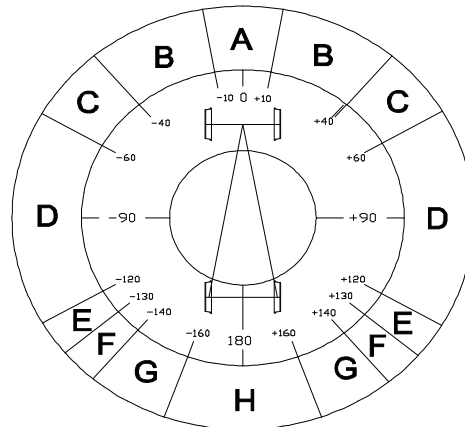

Fixed Axle
Rail Duties
Level Rail 0-50 mm
Canted Rail 50-150mm

Oscillating Axle

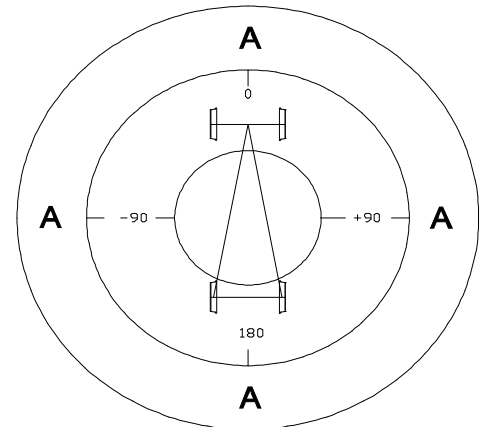

Fixed Axle
Rail Duties
Maximum Cant + Twist
150 + 27 mm

Machine fitted with permanently attached Quick Hitch

Tandem Quick Hitch Lifting Eye Charts

Machine Type:	Komatsu PW160
Serial Number:	H55912
Rail Axle Number:	2450
Network Rail Number:	99709 910086-6
Equipment:	Boom 5.15m Arm 2.1m
Date:	05th October 2016
Issue:	1
Software Versions:	
Safety Controller	V1.26.0.10
I/O Controller 1	V1.26.0.10
I/O Controller 2	V1.26.0.10
MMI	V1.26.0.10

This machine is equipped with a PME Rated Capacity Indicator. This system is designed to comply with RAILWAY SAFETY STANDARD RIS-1530-PLT Issue 5



Radius / Height are given in METRES. Loads are given in TONNES, and assume that the load is suspended vertically below the lifting point with no other equipment attached.

Loads marked 'b' boom, 'r' articulation, 'a' arm and 'k' bucket cylinder are limited by hydraulic capacity.



Loads marked 'c' indicates a capped SWL.

All rail duties listed are valid for use on and up to a 1:25 gradient, and with a maximum track twist of 27mm.



Machine Type	PW160 Basic Mono	Equipment	5.15m + 2.10m
Issue Date	04/10/2016	Reference	RRV147 / 2450
System Type	PME RAIL	Additional Info.	Monoboomb

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
1AU	Hitch	ROAD	+/- 10° Over Osc End		75%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	3.13	2.73	2.01a	-	-	-	-	-
7.00	-	-	-	-	-	2.72	2.41	2.14	1.84	-	-	-
6.00	-	-	-	-	-	2.73	2.42	2.15	1.87	1.62	-	-
5.00	-	-	-	-	3.17	2.75	2.42	2.11	1.84	1.62	1.42	-
4.00	4.75k	4.83k	4.44	3.74	3.17	2.70	2.33	2.03	1.79	1.58	1.40	1.24
3.00	-	-	4.19	3.48	2.95	2.54	2.21	1.94	1.71	1.52	1.35	1.21
2.00	-	-	3.43a	3.15	2.71	2.36	2.07	1.83	1.63	1.45	1.30	1.17
1.00	-	-	3.04a	2.93	2.53	2.21	1.95	1.73	1.55	1.39	1.26	1.13
0.00	-	-	3.36	2.82	2.42	2.11	1.86	1.66	1.49	1.34	1.21	1.10
-1.00	2.55a	3.63a	3.37	2.83	2.39	2.07	1.82	1.62	1.45	1.31	1.19	1.09
-2.00	4.65a	4.31	3.50	2.86	2.41	2.08	1.82	1.62	1.45	1.32	1.19	-
-3.00	5.91	4.49	3.58	2.92	2.46	2.12	1.87	1.68	1.49	1.32	-	-
-4.00	-	-	3.53	2.92	2.49	2.15	1.89	1.67	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
1BU	Hitch	ROAD	+/- 10° - +/- 45° Over Osc End		75%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	1.87	1.63	1.43	-	-	-	-	-
7.00	-	-	-	-	-	1.62	1.44	1.26	1.04	-	-	-
6.00	-	-	-	-	-	1.64	1.44	1.27	1.07	0.89	-	-
5.00	-	-	-	-	1.92	1.66	1.45	1.23	1.04	0.89	0.75	-
4.00	4.61	3.41	2.69	2.28	1.92	1.61	1.35	1.15	0.99	0.84	0.72	0.61
3.00	-	-	2.43	2.02	1.70	1.44	1.23	1.06	0.91	0.79	0.68	0.58
2.00	-	-	1.88	1.69	1.46	1.26	1.09	0.95	0.83	0.72	0.63	0.55
1.00	-	-	1.69	1.47	1.27	1.11	0.98	0.86	0.75	0.66	0.58	0.51
0.00	-	-	1.62	1.36	1.16	1.01	0.89	0.78	0.69	0.61	0.54	0.48
-1.00	2.55a	2.07	1.63	1.36	1.14	0.97	0.84	0.74	0.65	0.58	0.51	0.46
-2.00	3.01	2.23	1.75	1.40	1.16	0.98	0.85	0.74	0.66	0.59	0.52	-
-3.00	3.08	2.30	1.82	1.46	1.21	1.03	0.89	0.80	0.69	0.59	-	-
-4.00	-	-	1.78	1.46	1.23	1.05	0.91	0.80	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	2.50 Config	3.50 Sector	4.50	Osc Axle	Safety	Lift Mode	7.50
1CU	Hitch	ROAD	+/- 45° - +/- 135°			75%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	2.17	1.89	1.66	-	-	-	-	-
7.00	-	-	-	-	-	1.88	1.67	1.47	1.23	-	-	-
6.00	-	-	-	-	-	1.89	1.67	1.48	1.26	1.06	-	-
5.00	-	-	-	-	2.21	1.91	1.68	1.44	1.23	1.06	0.91	-
4.00	4.75k	3.92	3.10	2.62	2.21	1.86	1.58	1.36	1.17	1.02	0.88	0.76
3.00	-	-	2.84	2.36	1.99	1.70	1.46	1.26	1.10	0.96	0.84	0.73
2.00	-	-	2.29	2.03	1.75	1.52	1.32	1.16	1.02	0.89	0.79	0.69
1.00	-	-	2.09	1.81	1.57	1.37	1.20	1.06	0.94	0.83	0.74	0.65
0.00	-	-	2.03	1.70	1.45	1.27	1.11	0.99	0.88	0.78	0.70	0.62
-1.00	2.55a	2.58	2.04	1.70	1.43	1.23	1.07	0.94	0.84	0.75	0.67	0.61
-2.00	3.64a	2.74	2.16	1.74	1.45	1.24	1.07	0.94	0.84	0.76	0.68	-
-3.00	3.76	2.81	2.23	1.80	1.50	1.28	1.12	1.00	0.88	0.76	-	-
-4.00	-	-	2.18	1.80	1.52	1.31	1.14	1.00	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
1DU	Hitch	ROAD	+/- 135° - +/- 150° Over Fixed End		75%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	3.68a	3.01a	2.01a	-	-	-	-	-
7.00	-	-	-	-	-	4.36a	3.72a	2.95a	2.02a	-	-	-
6.00	-	-	-	-	-	4.28a	3.82	3.36	2.97	2.49a	-	-
5.00	-	-	-	-	4.35a	4.35	3.80	3.35	2.99	2.66	2.36	-
4.00	4.75k	4.83k	6.70c	6.07	5.10	4.34	3.77a	3.32	2.93	2.61	2.34	2.10
3.00	-	-	6.70c	5.88	4.93	4.21	3.66	3.22	2.86	2.55	2.30	2.07
2.00	-	-	3.43a	5.52	4.67	4.02	3.51	3.10	2.77	2.48	2.24	2.04
1.00	-	-	3.04a	5.26	4.47	3.86	3.38	3.00	2.69	2.42	2.19	2.00
0.00	-	-	3.97a	5.14	4.35	3.75	3.29	2.92	2.62	2.37	2.15	1.96
-1.00	2.55a	3.63a	5.35a	5.11	4.32	3.71	3.24	2.88	2.58	2.33	2.12	1.95
-2.00	4.65a	5.75a	6.29	5.19	4.34	3.72	3.25	2.88	2.58	2.34	2.13	-
-3.00	6.42a	6.31b	5.82b	5.14	4.33	3.73	3.27	2.90	2.59	2.34	-	-
-4.00	-	-	3.91b	3.62b	3.39b	3.08b	2.62b	2.04b	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
1EU	Hitch	ROAD	+/- 150° - +/- 160° Over Fixed End		75%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	3.68a	3.01a	2.01a	-	-	-	-	-
7.00	-	-	-	-	-	4.36a	3.72a	2.95a	2.02a	-	-	-
6.00	-	-	-	-	-	4.28a	3.82	3.36	2.97	2.49a	-	-
5.00	-	-	-	-	4.35a	4.35	3.80	3.35	2.99	2.66	2.36	-
4.00	4.75k	4.83k	6.70c	6.07	5.10	4.34	3.77a	3.32	2.93	2.61	2.34	2.10
3.00	-	-	6.70c	5.88	4.93	4.21	3.66	3.22	2.86	2.55	2.30	2.07
2.00	-	-	3.43a	5.52	4.67	4.02	3.51	3.10	2.77	2.48	2.24	2.04
1.00	-	-	3.04a	5.26	4.47	3.86	3.38	3.00	2.69	2.42	2.19	2.00
0.00	-	-	3.97a	5.14	4.35	3.75	3.29	2.92	2.62	2.37	2.15	1.96
-1.00	2.55a	3.63a	5.35a	5.11	4.32	3.71	3.24	2.88	2.58	2.33	2.12	1.95
-2.00	4.65a	5.75a	6.29	5.19	4.34	3.72	3.25	2.88	2.58	2.34	2.13	-
-3.00	6.42a	6.31b	5.82b	5.14	4.33	3.73	3.27	2.90	2.59	2.34	-	-
-4.00	-	-	3.91b	3.62b	3.39b	3.08b	2.62b	2.04b	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
1FU	Hitch	ROAD	+/- 160° - +/- 180° Over Fixed End		75%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	3.68a	3.01a	2.01a	-	-	-	-	-
7.00	-	-	-	-	-	4.36a	3.72a	2.95a	2.02a	-	-	-
6.00	-	-	-	-	-	4.28a	3.82	3.36	2.97	2.49a	-	-
5.00	-	-	-	-	4.35a	4.35	3.80	3.35	2.99	2.66	2.36	-
4.00	4.75k	4.83k	6.70c	6.07	5.10	4.34	3.77a	3.32	2.93	2.61	2.34	2.10
3.00	-	-	6.70c	5.88	4.93	4.21	3.66	3.22	2.86	2.55	2.30	2.07
2.00	-	-	3.43a	5.52	4.67	4.02	3.51	3.10	2.77	2.48	2.24	2.04
1.00	-	-	3.04a	5.26	4.47	3.86	3.38	3.00	2.69	2.42	2.19	2.00
0.00	-	-	3.97a	5.14	4.35	3.75	3.29	2.92	2.62	2.37	2.15	1.96
-1.00	2.55a	3.63a	5.35a	5.11	4.32	3.71	3.24	2.88	2.58	2.33	2.12	1.95
-2.00	4.65a	5.75a	6.29	5.19	4.34	3.72	3.25	2.88	2.58	2.34	2.13	-
-3.00	6.42a	6.31b	5.82b	5.14	4.33	3.73	3.27	2.90	2.59	2.34	-	-
-4.00	-	-	3.91b	3.62b	3.39b	3.08b	2.62b	2.04b	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	7.50
1AL	Hitch	ROAD	+/- 10° Over Osc End		75%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	3.61	3.01a	2.01a	-	-	-	-	-
7.00	-	-	-	-	-	3.11	2.73	2.40	2.02a	-	-	-
6.00	-	-	-	-	-	3.12	2.74	2.42	2.10	1.82	-	-
5.00	-	-	-	-	3.67	3.15	2.75	2.38	2.06	1.82	1.59	-
4.00	4.75k	4.83k	5.33	4.39	3.66	3.09	2.64	2.29	2.01	1.77	1.57	1.39
3.00	-	-	5.05	4.10	3.42	2.91	2.51	2.19	1.93	1.71	1.52	1.36
2.00	-	-	3.43a	3.74	3.16	2.72	2.37	2.08	1.84	1.64	1.47	1.32
1.00	-	-	3.04a	3.49	2.96	2.56	2.24	1.98	1.76	1.58	1.42	1.28
0.00	-	-	3.97a	3.37	2.84	2.45	2.15	1.90	1.70	1.52	1.37	1.25
-1.00	2.55a	3.63a	4.10	3.38	2.82	2.41	2.10	1.85	1.66	1.49	1.35	1.23
-2.00	4.65a	5.42	4.27	3.42	2.84	2.42	2.10	1.86	1.66	1.50	1.35	-
-3.00	6.42a	5.58	4.31	3.49	2.90	2.47	2.15	1.91	1.70	1.50	-	-
-4.00	-	-	3.91b	3.46	2.89	2.48	2.17	1.91	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
1BL	Hitch	ROAD	+/- 10° - +/- 45° Over Osc End		75%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	3.55	3.01a	2.01a	-	-	-	-	-
7.00	-	-	-	-	-	3.02	2.64	2.31	1.95	-	-	-
6.00	-	-	-	-	-	3.04	2.65	2.32	2.00	1.71	-	-
5.00	-	-	-	-	3.60	3.06	2.65	2.28	1.96	1.71	1.49	-
4.00	4.75k	4.83k	5.40	4.37	3.60	3.00	2.55	2.19	1.91	1.67	1.47	1.29
3.00	-	-	5.09	4.06	3.35	2.81	2.41	2.09	1.82	1.61	1.42	1.26
2.00	-	-	3.43a	3.68	3.07	2.62	2.26	1.97	1.73	1.53	1.37	1.22
1.00	-	-	3.04a	3.41	2.86	2.45	2.12	1.86	1.65	1.47	1.31	1.18
0.00	-	-	3.97a	3.28	2.73	2.33	2.03	1.78	1.58	1.41	1.27	1.14
-1.00	2.55a	3.63a	4.07	3.29	2.70	2.29	1.98	1.73	1.54	1.38	1.24	1.13
-2.00	4.65a	5.55	4.25	3.33	2.73	2.30	1.98	1.74	1.54	1.39	1.25	-
-3.00	6.42a	5.70	4.29	3.41	2.79	2.35	2.03	1.80	1.58	1.39	-	-
-4.00	-	-	3.91b	3.37	2.80	2.37	2.05b	1.80	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	2.00 Config	2.50 Config	3.00 Config	3.50 Sector	4.00	4.50	Osc Axle	5.50	Safety	6.50 Lift Mode	7.50
1CL	Hitch	ROAD			+/- 45° - +/- 135°					75%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	3.50	2.99	2.01a	-	-	-	-	-
7.00	-	-	-	-	-	2.98	2.60	2.27	1.92	-	-	-
6.00	-	-	-	-	-	2.99	2.61	2.29	1.97	1.69	-	-
5.00	-	-	-	-	3.55	3.02	2.61	2.24	1.93	1.69	1.47	-
4.00	4.75k	4.83k	5.32	4.31	3.55	2.96	2.51	2.16	1.87	1.64	1.44	1.26
3.00	-	-	5.02	4.00	3.30	2.77	2.37	2.05	1.79	1.58	1.39	1.23
2.00	-	-	3.43a	3.62	3.02	2.57	2.22	1.93	1.70	1.51	1.34	1.19
1.00	-	-	3.04a	3.35	2.81	2.40	2.09	1.83	1.62	1.44	1.29	1.15
0.00	-	-	3.97a	3.22	2.68	2.29	1.99	1.75	1.55	1.38	1.24	1.12
-1.00	2.55a	3.63a	3.99	3.23	2.65	2.24	1.94	1.70	1.51	1.35	1.22	1.10
-2.00	4.65a	5.45	4.18	3.27	2.68	2.25	1.94	1.70	1.51	1.36	1.22	-
-3.00	6.42a	5.62	4.21	3.34	2.73	2.31	2.00	1.77	1.55	1.36	-	-
-4.00	-	-	3.91b	3.31	2.75	2.33	2.02	1.76	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
1DL	Hitch	ROAD	+/- 135° - +/- 150° Over Fixed End		75%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	3.68a	3.01a	2.01a	-	-	-	-	-
7.00	-	-	-	-	-	4.36a	3.72a	2.95a	2.02a	-	-	-
6.00	-	-	-	-	-	4.28a	3.82	3.36	2.97	2.49a	-	-
5.00	-	-	-	-	4.35a	4.35	3.80	3.35	2.99	2.66	2.36	-
4.00	4.75k	4.83k	6.70c	6.07	5.10	4.34	3.77a	3.32	2.93	2.61	2.34	2.10
3.00	-	-	6.70c	5.88	4.93	4.21	3.66	3.22	2.86	2.55	2.30	2.07
2.00	-	-	3.43a	5.52	4.67	4.02	3.51	3.10	2.77	2.48	2.24	2.04
1.00	-	-	3.04a	5.26	4.47	3.86	3.38	3.00	2.69	2.42	2.19	2.00
0.00	-	-	3.97a	5.14	4.35	3.75	3.29	2.92	2.62	2.37	2.15	1.96
-1.00	2.55a	3.63a	5.35a	5.11	4.32	3.71	3.24	2.88	2.58	2.33	2.12	1.95
-2.00	4.65a	5.75a	6.29	5.19	4.34	3.72	3.25	2.88	2.58	2.34	2.13	-
-3.00	6.42a	6.31b	5.82b	5.14	4.33	3.73	3.27	2.90	2.59	2.34	-	-
-4.00	-	-	3.91b	3.62b	3.39b	3.08b	2.62b	2.04b	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	2.50 Config	3.50 Sector	4.50	6.00 Axle	5.50 Safety	6.50 Lift Mode	7.50
1EL	Hitch	ROAD	+/- 150° - +/- 160° Over Fixed End		75%	Tandem		



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	3.68a	3.01a	2.01a	-	-	-	-	-
7.00	-	-	-	-	-	4.36a	3.72a	2.95a	2.02a	-	-	-
6.00	-	-	-	-	-	4.28a	3.82	3.36	2.97	2.49a	-	-
5.00	-	-	-	-	4.35a	4.35	3.80	3.35	2.99	2.66	2.36	-
4.00	4.75k	4.83k	6.70c	6.07	5.10	4.34	3.77a	3.32	2.93	2.61	2.34	2.10
3.00	-	-	6.70c	5.88	4.93	4.21	3.66	3.22	2.86	2.55	2.30	2.07
2.00	-	-	3.43a	5.52	4.67	4.02	3.51	3.10	2.77	2.48	2.24	2.04
1.00	-	-	3.04a	5.26	4.47	3.86	3.38	3.00	2.69	2.42	2.19	2.00
0.00	-	-	3.97a	5.14	4.35	3.75	3.29	2.92	2.62	2.37	2.15	1.96
-1.00	2.55a	3.63a	5.35a	5.11	4.32	3.71	3.24	2.88	2.58	2.33	2.12	1.95
-2.00	4.65a	5.75a	6.29	5.19	4.34	3.72	3.25	2.88	2.58	2.34	2.13	-
-3.00	6.42a	6.31b	5.82b	5.14	4.33	3.73	3.27	2.90	2.59	2.34	-	-
-4.00	-	-	3.91b	3.62b	3.39b	3.08b	2.62b	2.04b	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
1FL	Hitch	ROAD	+/- 160° - +/- 180° Over Fixed End		75%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	3.68a	3.01a	2.01a	-	-	-	-	-
7.00	-	-	-	-	-	4.36a	3.72a	2.95a	2.02a	-	-	-
6.00	-	-	-	-	-	4.28a	3.82	3.36	2.97	2.49a	-	-
5.00	-	-	-	-	4.35a	4.35	3.80	3.35	2.99	2.66	2.36	-
4.00	4.75k	4.83k	6.70c	6.07	5.10	4.34	3.77a	3.32	2.93	2.61	2.34	2.10
3.00	-	-	6.70c	5.88	4.93	4.21	3.66	3.22	2.86	2.55	2.30	2.07
2.00	-	-	3.43a	5.52	4.67	4.02	3.51	3.10	2.77	2.48	2.24	2.04
1.00	-	-	3.04a	5.26	4.47	3.86	3.38	3.00	2.69	2.42	2.19	2.00
0.00	-	-	3.97a	5.14	4.35	3.75	3.29	2.92	2.62	2.37	2.15	1.96
-1.00	2.55a	3.63a	5.35a	5.11	4.32	3.71	3.24	2.88	2.58	2.33	2.12	1.95
-2.00	4.65a	5.75a	6.29	5.19	4.34	3.72	3.25	2.88	2.58	2.34	2.13	-
-3.00	6.42a	6.31b	5.82b	5.14	4.33	3.73	3.27	2.90	2.59	2.34	-	-
-4.00	-	-	3.91b	3.62b	3.39b	3.08b	2.62b	2.04b	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	7.50
2AU	Hitch	RAIL	+/- 10° Over Osc End		67%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	2.96	2.60	2.31	-	-	-	-	-
7.00	-	-	-	-	2.59	2.31	2.06	1.78	-	-	-	-
6.00	-	-	-	-	2.61	2.31	2.05	1.79	1.58	1.37	-	-
5.00	-	-	-	3.53	3.02	2.63	2.30	2.02	1.77	1.56	1.38	1.21
4.00	-	5.20	4.17	3.52	2.97	2.55	2.22	1.94	1.72	1.52	1.36	1.21
3.00	-	-	3.84	3.24	2.77	2.39	2.10	1.85	1.65	1.47	1.32	1.18
2.00	-	-	3.11a	2.95	2.56	2.24	1.98	1.76	1.57	1.41	1.27	1.15
1.00	-	-	3.18a	2.79	2.41	2.12	1.88	1.68	1.50	1.36	1.23	1.11
0.00	-	-	3.22	2.70	2.33	2.04	1.81	1.61	1.45	1.31	1.19	1.09
-1.00	2.71a	4.02	3.26	2.73	2.32	2.01	1.78	1.58	1.42	1.29	1.18	1.08
-2.00	4.94a	4.23	3.35	2.76	2.35	2.03	1.79	1.59	1.44	1.31	1.18	-
-3.00	5.55	4.23	3.40	2.83	2.40	2.08	1.84	1.64	1.47	-	-	-
-4.00	-	-	-	2.80	2.39	2.08	1.83	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
2BU	Hitch	RAIL	+/- 10° - +/- 40° Over Osc End		67%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	1.95	1.72	1.55	-	-	-	-	-
7.00	-	-	-	-	1.72	1.54	1.38	1.17	-	-	-	-
6.00	-	-	-	-	1.73	1.55	1.37	1.18	1.03	0.87	-	-
5.00	-	-	-	2.32	2.00	1.75	1.54	1.34	1.16	1.01	0.88	0.75
4.00	-	3.28	2.68	2.31	1.96	1.68	1.45	1.27	1.11	0.97	0.85	0.74
3.00	-	-	2.38	2.05	1.77	1.53	1.34	1.18	1.04	0.92	0.82	0.72
2.00	-	-	1.97	1.78	1.58	1.39	1.23	1.09	0.97	0.86	0.77	0.69
1.00	-	-	1.87	1.63	1.44	1.27	1.13	1.01	0.91	0.81	0.73	0.65
0.00	-	-	1.82	1.56	1.36	1.20	1.07	0.95	0.86	0.77	0.70	0.63
-1.00	2.71a	2.25	1.85	1.58	1.35	1.18	1.04	0.92	0.83	0.75	0.68	0.62
-2.00	3.03	2.41	1.94	1.61	1.37	1.19	1.05	0.93	0.85	0.76	0.68	-
-3.00	3.04	2.41	1.98	1.67	1.42	1.24	1.10	0.98	0.87	-	-	-
-4.00	-	-	-	1.64	1.42	1.24	1.09	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	7.50
2CU	Hitch	RAIL	+/- 40° - +/- 60° Over Osc End		67%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	1.74	1.53	1.38	-	-	-	-	-
7.00	-	-	-	-	-	1.53	1.37	1.23	1.03	-	-	-
6.00	-	-	-	-	-	1.55	1.38	1.22	1.04	0.90	0.75	-
5.00	-	-	-	2.07	1.78	1.56	1.37	1.18	1.01	0.88	0.75	0.64
4.00	-	2.93	2.40	2.06	1.75	1.49	1.28	1.11	0.97	0.84	0.73	0.63
3.00	-	-	2.10	1.81	1.55	1.34	1.17	1.03	0.90	0.79	0.70	0.61
2.00	-	-	1.68	1.53	1.36	1.20	1.06	0.94	0.83	0.73	0.65	0.57
1.00	-	-	1.58	1.39	1.22	1.08	0.96	0.86	0.77	0.68	0.61	0.54
0.00	-	-	1.54	1.31	1.14	1.01	0.90	0.80	0.72	0.64	0.58	0.52
-1.00	2.46	1.91	1.57	1.33	1.14	0.99	0.87	0.77	0.69	0.62	0.56	0.51
-2.00	2.59	2.06	1.65	1.37	1.16	1.00	0.88	0.78	0.71	0.63	0.56	-
-3.00	2.60	2.06	1.70	1.42	1.21	1.05	0.93	0.83	0.73	-	-	-
-4.00	-	-	-	1.40	1.20	1.05	0.92	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
2DU	Hitch	RAIL	+/- 60° - +/- 120°		67%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	1.53	1.34	1.19	-	-	-	-	-
7.00	-	-	-	-	-	1.33	1.19	1.05	0.87	-	-	-
6.00	-	-	-	-	-	1.35	1.19	1.04	0.87	0.74	0.59	-
5.00	-	-	-	1.86	1.58	1.36	1.18	1.00	0.85	0.72	0.60	0.49
4.00	-	2.71	2.17	1.85	1.54	1.29	1.09	0.93	0.80	0.68	0.58	0.49
3.00	-	-	1.85	1.57	1.33	1.14	0.98	0.84	0.73	0.63	0.54	0.46
2.00	-	-	1.39	1.28	1.13	0.98	0.86	0.75	0.65	0.57	0.49	0.43
1.00	-	-	1.29	1.12	0.98	0.86	0.76	0.67	0.59	0.52	0.45	0.39
0.00	-	-	1.24	1.04	0.90	0.78	0.69	0.61	0.54	0.47	0.42	0.37
-1.00	2.14	1.59	1.27	1.06	0.89	0.76	0.66	0.58	0.51	0.45	0.40	0.36
-2.00	2.28	1.76	1.36	1.10	0.91	0.78	0.67	0.58	0.52	0.46	0.40	-
-3.00	2.30	1.76	1.41	1.16	0.97	0.82	0.72	0.64	0.55	-	-	-
-4.00	-	-	-	1.13	0.96	0.83	0.72	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	2.50 Config	3.50 Sector	4.50	6.00 Axle	5.50 Safety	6.50 Lift Mode	7.50
2EU	Hitch	RAIL	+/- 120° - +/- 130° Over Fixed End		67%	Tandem		



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	1.84	1.63	1.46	-	-	-	-	-
7.00	-	-	-	-	-	1.62	1.46	1.31	1.11	-	-	-
6.00	-	-	-	-	-	1.64	1.46	1.30	1.12	0.97	0.82	-
5.00	-	-	-	2.18	1.88	1.65	1.45	1.26	1.09	0.95	0.82	0.70
4.00	-	3.04	2.51	2.17	1.84	1.58	1.37	1.19	1.05	0.92	0.80	0.70
3.00	-	-	2.21	1.92	1.66	1.44	1.26	1.11	0.98	0.87	0.77	0.67
2.00	-	-	1.81	1.65	1.47	1.30	1.15	1.02	0.91	0.81	0.72	0.64
1.00	-	-	1.71	1.51	1.33	1.18	1.06	0.94	0.85	0.76	0.68	0.61
0.00	-	-	1.67	1.43	1.25	1.11	0.99	0.89	0.80	0.72	0.65	0.58
-1.00	2.61	2.05	1.70	1.45	1.25	1.09	0.96	0.86	0.77	0.70	0.63	0.57
-2.00	2.73	2.20	1.78	1.49	1.27	1.10	0.97	0.87	0.79	0.71	0.64	-
-3.00	2.74	2.20	1.83	1.54	1.32	1.15	1.02	0.91	0.81	-	-	-
-4.00	-	-	-	1.52	1.31	1.15	1.02	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
2FU	Hitch	RAIL	+/- 130° - +/- 140° Over Fixed End		67%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	2.05	1.81	1.63	-	-	-	-	-
7.00	-	-	-	-	-	1.81	1.63	1.46	1.25	-	-	-
6.00	-	-	-	-	-	1.82	1.63	1.45	1.26	1.10	0.94	-
5.00	-	-	-	2.42	2.09	1.84	1.62	1.42	1.23	1.08	0.94	0.82
4.00	-	3.37	2.79	2.41	2.05	1.77	1.54	1.35	1.19	1.05	0.92	0.81
3.00	-	-	2.50	2.16	1.87	1.63	1.43	1.26	1.12	1.00	0.89	0.79
2.00	-	-	2.09	1.89	1.68	1.49	1.32	1.17	1.05	0.94	0.84	0.75
1.00	-	-	1.99	1.75	1.54	1.37	1.22	1.10	0.99	0.89	0.80	0.72
0.00	-	-	1.95	1.67	1.46	1.30	1.16	1.04	0.94	0.85	0.77	0.70
-1.00	2.71a	2.39	1.98	1.69	1.46	1.28	1.13	1.01	0.91	0.83	0.75	0.69
-2.00	3.15	2.54	2.06	1.73	1.48	1.29	1.14	1.02	0.93	0.84	0.76	-
-3.00	3.16	2.54	2.11	1.78	1.53	1.33	1.19	1.07	0.95	-	-	-
-4.00	-	-	-	1.76	1.52	1.34	1.18	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	2.50 Config	3.50 Sector	4.50	6.00 Axle	5.50 Safety	6.50 Lift Mode	7.50
2GU	Hitch	RAIL	+/- 140° - +/- 160° Over Fixed End		67%	Tandem		



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	2.42	2.15	1.93	-	-	-	-	-
7.00	-	-	-	-	-	2.14	1.93	1.73	1.50	-	-	-
6.00	-	-	-	-	-	2.16	1.93	1.72	1.51	1.33	1.15	-
5.00	-	-	-	2.84	2.47	2.17	1.92	1.69	1.48	1.31	1.16	1.02
4.00	-	3.97	3.29	2.84	2.43	2.10	1.84	1.62	1.44	1.28	1.14	1.01
3.00	-	-	2.99	2.58	2.24	1.96	1.73	1.54	1.37	1.23	1.10	0.99
2.00	-	-	2.59	2.32	2.05	1.82	1.62	1.45	1.30	1.17	1.06	0.95
1.00	-	-	2.49	2.17	1.92	1.70	1.52	1.37	1.24	1.12	1.01	0.92
0.00	-	-	2.45	2.10	1.84	1.63	1.46	1.31	1.19	1.08	0.98	0.90
-1.00	2.71a	2.97	2.48	2.12	1.83	1.61	1.43	1.28	1.16	1.06	0.97	0.89
-2.00	3.88	3.14	2.56	2.15	1.85	1.62	1.44	1.29	1.18	1.07	0.97	-
-3.00	3.91	3.13	2.61	2.21	1.91	1.67	1.49	1.34	1.20	-	-	-
-4.00	-	-	-	2.19	1.90	1.67	1.48	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
2HU	Hitch	RAIL	+/- 160° - +/- 180° Over Fixed End		67%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	4.11a	3.37a	2.55a	-	-	-	-	-
7.00	-	-	-	-	-	3.92	3.44	3.03	2.39a	-	-	-
6.00	-	-	-	-	-	3.93a	3.45	3.06	2.72	2.41	1.55a	-
5.00	-	-	-	4.84a	4.51	3.91	3.43	3.05	2.69	2.40	2.15	1.52a
4.00	-	6.70c	6.46	5.33	4.49	3.87	3.37	2.97	2.64	2.36	2.13	1.92
3.00	-	-	6.10	5.07	4.30	3.71	3.25	2.88	2.57	2.31	2.09	1.89
2.00	-	-	3.11a	4.75	4.08	3.55	3.12	2.78	2.49	2.25	2.04	1.86
1.00	-	-	3.18a	4.57	3.93	3.42	3.02	2.69	2.42	2.19	1.99	1.82
0.00	-	-	4.23a	4.50	3.84	3.34	2.95	2.63	2.37	2.15	1.96	1.79
-1.00	2.71a	4.24a	5.41	4.52	3.83	3.31	2.92	2.60	2.34	2.12	1.94	1.78
-2.00	4.94a	5.99a	5.53b	4.56	3.85	3.33	2.93	2.61	2.36	2.14	1.95	-
-3.00	6.31b	5.85b	5.47b	4.54	3.86	3.35	2.95	2.63	2.36	-	-	-
-4.00	-	-	-	3.27b	2.95b	2.70b	2.27b	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	7.50
2AL	Hitch	RAIL	+/- 10° Over Osc End		75%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	4.11a	3.37a	2.55a	-	-	-	-	-
7.00	-	-	-	-	-	4.29	3.72a	3.21a	2.39a	-	-	-
6.00	-	-	-	-	-	4.29	3.74	3.28	2.92	2.59	1.55a	-
5.00	-	-	-	4.84a	4.67a	4.29	3.72	3.28a	2.91	2.59	2.30	1.52a
4.00	-	6.70c	6.70c	5.98	4.98	4.24	3.68	3.22	2.85	2.54	2.28	2.05
3.00	-	-	6.70c	5.67	4.76	4.07	3.54	3.12	2.77	2.48	2.23	2.01
2.00	-	-	3.11a	5.30	4.51	3.89	3.40	3.00	2.68	2.41	2.18	1.97
1.00	-	-	3.18a	5.09	4.32	3.74	3.28	2.91	2.60	2.35	2.13	1.94
0.00	-	-	4.23a	4.98	4.22	3.64	3.19	2.84	2.54	2.30	2.09	1.90
-1.00	2.71a	4.24a	5.51a	5.03	4.21	3.61	3.16	2.80	2.51	2.27	2.06	1.89a
-2.00	4.94a	5.99a	6.16	5.06	4.24	3.63	3.17	2.81	2.52	2.28	2.07	-
-3.00	6.31b	5.85b	5.47b	5.00	4.22b	3.63	3.18	2.82	2.53	-	-	-
-4.00	-	-	-	3.27b	2.95b	2.70b	2.27b	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
2BL	Hitch	RAIL	+/- 10° - +/- 40° Over Osc End		90%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	3.76	3.24	2.55a	-	-	-	-	-
7.00	-	-	-	-	-	3.23	2.84	2.50	2.13	-	-	-
6.00	-	-	-	-	-	3.26	2.85	2.49	2.14	1.86	1.55a	-
5.00	-	-	-	4.61	3.84	3.26	2.83	2.44	2.10	1.84	1.58	1.34
4.00	-	6.70c	5.62	4.59	3.78	3.17	2.71	2.33	2.03	1.78	1.55	1.33
3.00	-	-	5.11	4.17	3.47	2.95	2.53	2.21	1.94	1.70	1.49	1.29
2.00	-	-	3.11a	3.73	3.17	2.72	2.37	2.07	1.83	1.61	1.42	1.24
1.00	-	-	3.18a	3.49	2.95	2.55	2.22	1.96	1.74	1.53	1.35	1.19
0.00	-	-	4.13	3.37	2.83	2.43	2.12	1.87	1.66	1.46	1.30	1.15
-1.00	2.71a	4.24a	4.15	3.40	2.82	2.40	2.08	1.83	1.62	1.43	1.27	1.14
-2.00	4.94a	5.53	4.35	3.46	2.85	2.42	2.09	1.84	1.64	1.45	1.28	-
-3.00	6.31b	5.65	4.37b	3.52	2.94	2.49	2.17	1.91	1.68	-	-	-
-4.00	-	-	-	3.27b	2.89	2.46	2.15	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
2CL	Hitch	RAIL	+/- 40° - +/- 60° Over Osc End		90%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	3.30	2.86	2.50	-	-	-	-	-
7.00	-	-	-	-	2.85	2.52	2.23	1.89	-	-	-	-
6.00	-	-	-	-	2.88	2.53	2.21	1.90	1.64	1.36	-	-
5.00	-	-	-	4.02	3.37	2.90	2.51	2.16	1.86	1.61	1.37	1.15
4.00	-	6.24	4.84	4.01	3.32	2.79	2.39	2.06	1.80	1.55	1.34	1.14
3.00	-	-	4.36	3.61	3.03	2.58	2.22	1.94	1.70	1.47	1.28	1.10
2.00	-	-	3.11a	3.19	2.74	2.37	2.06	1.81	1.58	1.38	1.21	1.05
1.00	-	-	3.18a	2.96	2.53	2.19	1.92	1.69	1.48	1.30	1.14	1.00
0.00	-	-	3.45	2.84	2.41	2.08	1.82	1.60	1.41	1.24	1.09	0.97
-1.00	2.71a	4.24a	3.50	2.87	2.40	2.05	1.78	1.56	1.36	1.20	1.07	0.95
-2.00	4.94a	4.79	3.65	2.93	2.43	2.07	1.80	1.57	1.39	1.22	1.07	-
-3.00	6.31b	4.76	3.72	3.01	2.51	2.14	1.87	1.65	1.43	-	-	-
-4.00	-	-	-	2.98	2.50	2.14	1.86	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
2DL	Hitch	RAIL	+/- 60° - +/- 120°		90%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	2.91	2.51	2.22	-	-	-	-	-
7.00	-	-	-	-	2.51	2.21	1.95	1.63	-	-	-	-
6.00	-	-	-	-	2.53	2.22	1.94	1.64	1.38	1.13	-	-
5.00	-	-	-	3.55	2.98	2.55	2.21	1.89	1.60	1.36	1.14	0.94
4.00	-	5.52	4.27	3.54	2.92	2.45	2.08	1.79	1.53	1.30	1.11	0.93
3.00	-	-	3.79	3.14	2.63	2.23	1.92	1.66	1.42	1.22	1.05	0.89
2.00	-	-	3.11a	2.72	2.34	2.02	1.76	1.52	1.31	1.13	0.98	0.84
1.00	-	-	2.96	2.49	2.13	1.85	1.61	1.39	1.21	1.05	0.91	0.79
0.00	-	-	2.89	2.37	2.01	1.74	1.50	1.30	1.13	0.99	0.86	0.75
-1.00	2.71a	3.75	2.94	2.41	2.00	1.70	1.45	1.25	1.09	0.95	0.83	0.74
-2.00	4.94a	4.06	3.08	2.46	2.04	1.73	1.47	1.27	1.11	0.97	0.84	-
-3.00	5.64	4.06	3.15	2.55	2.11	1.79	1.55	1.34	1.15	-	-	-
-4.00	-	-	-	2.51	2.10	1.80	1.54	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	2.50 Config	3.50 Sector	4.50	6.00 Axle	5.50 Safety	6.50 Lift Mode	7.50
2EL	Hitch	RAIL	+/- 120° - +/- 130° Over Fixed End		75%	Tandem		



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	3.77	3.28	2.55a	-	-	-	-	-
7.00	-	-	-	-	-	3.28	2.90	2.58a	2.24	-	-	-
6.00	-	-	-	-	-	3.30	2.91	2.57	2.25	1.98	1.55a	-
5.00	-	-	-	4.53	3.83	3.30	2.90	2.53	2.22	1.96	1.74	1.52a
4.00	-	6.70c	5.43	4.52	3.78	3.23	2.80	2.45	2.16	1.92	1.71	1.53
3.00	-	-	5.04	4.19	3.55	3.05	2.66	2.34	2.08	1.86	1.66	1.50
2.00	-	-	3.11a	3.84	3.31	2.87	2.52	2.23	1.99	1.79	1.61	1.46
1.00	-	-	3.18a	3.66	3.13	2.73	2.41	2.14	1.92	1.73	1.56	1.42
0.00	-	-	4.23a	3.56	3.03	2.64	2.33	2.07	1.86	1.68	1.52	1.39
-1.00	2.71a	4.24a	4.29	3.59	3.02	2.61	2.29	2.03	1.83	1.65	1.50	1.38
-2.00	4.94a	5.51	4.45	3.63	3.05	2.63	2.30	2.04	1.85	1.67	1.51	-
-3.00	6.31b	5.62b	4.45	3.67b	3.11	2.68	2.35	2.09	1.88	-	-	-
-4.00	-	-	-	3.27b	2.95b	2.65	2.27b	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
2FL	Hitch	RAIL	+/- 130° - +/- 140° Over Fixed End		75%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	4.11a	3.37a	2.55a	-	-	-	-	-
7.00	-	-	-	-	-	3.60	3.18	2.81	2.39a	-	-	-
6.00	-	-	-	-	-	3.61	3.19	2.82	2.48	2.19	1.55a	-
5.00	-	-	-	4.84a	4.16	3.60	3.17	2.78	2.45	2.17	1.93	1.52a
4.00	-	6.70c	5.95	4.93	4.15	3.55	3.08	2.70	2.39	2.13	1.90	1.71
3.00	-	-	5.55	4.62	3.91	3.37	2.94	2.60	2.31	2.07	1.86	1.68
2.00	-	-	3.11a	4.27	3.67	3.19	2.80	2.49	2.22	2.00	1.81	1.64
1.00	-	-	3.18a	4.08	3.50	3.05	2.69	2.39	2.15	1.94	1.76	1.60
0.00	-	-	4.23a	3.99	3.40	2.96	2.61	2.32	2.09	1.89	1.72	1.57
-1.00	2.71a	4.24a	4.79	4.01	3.39	2.93	2.57	2.29	2.06	1.86	1.70	1.56
-2.00	4.94a	5.99a	4.97	4.06	3.42	2.95	2.58	2.30	2.08	1.88	1.70	-
-3.00	6.31b	5.85b	4.94	4.07	3.45	2.99	2.62	2.33	2.10	-	-	-
-4.00	-	-	-	3.27b	2.95b	2.70b	2.27b	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	2.50 Config	3.50 Sector	4.50	6.00 Axle	5.50 Safety	6.50 Lift Mode	7.50
2GL	Hitch	RAIL	+/- 140° - +/- 160° Over Fixed End		75%	Tandem		



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	4.11a	3.37a	2.55a	-	-	-	-	-
7.00	-	-	-	-	-	4.20	3.64	3.18	2.39a	-	-	-
6.00	-	-	-	-	-	4.18	3.65	3.23	2.88	2.54	1.55a	-
5.00	-	-	-	4.84a	4.67a	4.18	3.65	3.23	2.86	2.54	2.27	1.52a
4.00	-	6.70c	6.70c	5.77	4.84	4.14a	3.60	3.16	2.80	2.50	2.24	2.02
3.00	-	-	6.64	5.48	4.62	3.97	3.46	3.05	2.72	2.44	2.20	1.99
2.00	-	-	3.11a	5.12	4.37	3.79	3.32	2.94	2.63	2.37	2.14	1.95
1.00	-	-	3.18a	4.91	4.19	3.64	3.20	2.85	2.55	2.31	2.09	1.91
0.00	-	-	4.23a	4.81	4.09	3.55	3.12	2.78	2.50	2.26	2.05	1.88
-1.00	2.71a	4.24a	5.51a	4.85	4.08	3.52	3.09	2.74	2.46	2.23	2.03	1.87
-2.00	4.94a	5.99a	5.96	4.89	4.11	3.54	3.10	2.75	2.48	2.25	2.04	-
-3.00	6.31b	5.85b	5.47b	4.84	4.10b	3.55	3.11	2.76	2.48	-	-	-
-4.00	-	-	-	3.27b	2.95b	2.70b	2.27b	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
2HL	Hitch	RAIL	+/- 160° - +/- 180° Over Fixed End		75%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	4.11a	3.37a	2.55a	-	-	-	-	-
7.00	-	-	-	-	-	4.42	3.85	3.21a	2.39a	-	-	-
6.00	-	-	-	-	-	4.39a	3.88	3.43	3.07	2.71a	1.55a	-
5.00	-	-	-	4.84a	4.67a	4.42	3.86	3.43k	3.07	2.75	2.46	1.52a
4.00	-	6.70c	6.70c	6.04	5.12	4.39	3.85	3.39	3.02	2.70	2.43	2.20
3.00	-	-	6.70c	5.78	4.91	4.23	3.71	3.29	2.94	2.64	2.39	2.17
2.00	-	-	3.11a	5.44	4.67	4.06	3.57	3.18	2.85	2.57	2.34	2.13
1.00	-	-	3.18a	5.22	4.49	3.92	3.46	3.08	2.77	2.51	2.29	2.09
0.00	-	-	4.23a	5.14	4.39	3.82	3.38	3.02	2.72	2.46	2.25	2.06
-1.00	2.71a	4.24a	5.51a	5.15a	4.38	3.80	3.34	2.98	2.68	2.44	2.23	2.04a
-2.00	4.94a	5.99a	6.22	5.20	4.41	3.82	3.35	2.99	2.70	2.45	2.23	-
-3.00	6.31b	5.85b	5.47b	5.03b	4.38	3.81b	3.36	2.99	2.69	-	-	-
-4.00	-	-	-	3.27b	2.95b	2.70b	2.27b	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	7.50
3AU	Hitch	CANT	+/- 10° Over Osc End		67%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	2.40	2.09	1.85	-	-	-	-	-
7.00	-	-	-	-	-	2.08	1.85	1.64	1.39	-	-	-
6.00	-	-	-	-	-	2.10	1.85	1.63	1.40	1.22	1.03	-
5.00	-	-	-	2.90	2.45	2.12	1.84	1.59	1.37	1.20	1.04	0.90
4.00	-	4.37	3.45	2.89	2.41	2.04	1.75	1.52	1.32	1.16	1.02	0.89
3.00	-	-	3.10	2.59	2.19	1.88	1.63	1.42	1.25	1.10	0.98	0.86
2.00	-	-	2.62	2.28	1.98	1.72	1.50	1.33	1.17	1.04	0.93	0.83
1.00	-	-	2.50	2.12	1.83	1.59	1.40	1.24	1.11	0.99	0.88	0.79
0.00	-	-	2.45	2.03	1.74	1.51	1.33	1.18	1.05	0.94	0.85	0.77
-1.00	2.71a	3.12	2.49	2.06	1.73	1.49	1.30	1.15	1.02	0.92	0.83	0.76
-2.00	4.36	3.34	2.58	2.10	1.75	1.50	1.31	1.16	1.04	0.94	0.84	-
-3.00	4.50	3.33	2.64	2.16	1.81	1.55	1.37	1.21	1.07	-	-	-
-4.00	-	-	-	2.13	1.80	1.55	1.36	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
3BU	Hitch	CANT	+/- 10° - +/- 40° Over Osc End		67%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	1.64	1.45	1.30	-	-	-	-	-
7.00	-	-	-	-	-	1.45	1.30	1.16	0.98	-	-	-
6.00	-	-	-	-	-	1.46	1.31	1.15	0.99	0.85	0.71	-
5.00	-	-	-	1.95	1.69	1.48	1.30	1.12	0.96	0.83	0.71	0.60
4.00	-	2.72	2.25	1.94	1.65	1.41	1.21	1.05	0.92	0.80	0.69	0.59
3.00	-	-	1.95	1.69	1.46	1.27	1.10	0.97	0.85	0.74	0.65	0.57
2.00	-	-	1.55	1.43	1.27	1.12	0.99	0.88	0.78	0.69	0.61	0.54
1.00	-	-	1.45	1.28	1.14	1.01	0.90	0.80	0.72	0.64	0.57	0.50
0.00	-	-	1.41	1.21	1.06	0.94	0.83	0.75	0.67	0.60	0.54	0.48
-1.00	2.22	1.74	1.44	1.23	1.05	0.91	0.81	0.72	0.64	0.58	0.52	0.47
-2.00	2.34	1.89	1.52	1.26	1.07	0.93	0.82	0.72	0.66	0.59	0.52	-
-3.00	2.35	1.89	1.56	1.32	1.13	0.97	0.87	0.77	0.68	-	-	-
-4.00	-	-	-	1.29	1.12	0.98	0.86	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	7.50
3CU	Hitch	CANT	+/- 40° - +/- 60° Over Osc End		67%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	1.51	1.34	1.20	-	-	-	-	-
7.00	-	-	-	-	-	1.34	1.20	1.07	0.90	-	-	-
6.00	-	-	-	-	-	1.35	1.21	1.06	0.90	0.77	0.63	-
5.00	-	-	-	1.81	1.56	1.37	1.20	1.03	0.88	0.76	0.64	0.53
4.00	-	2.52	2.08	1.80	1.52	1.30	1.11	0.96	0.83	0.72	0.62	0.53
3.00	-	-	1.79	1.55	1.33	1.15	1.00	0.88	0.77	0.67	0.58	0.50
2.00	-	-	1.38	1.28	1.15	1.01	0.89	0.79	0.69	0.61	0.54	0.47
1.00	-	-	1.28	1.14	1.01	0.90	0.80	0.71	0.63	0.56	0.50	0.44
0.00	-	-	1.24	1.06	0.93	0.82	0.73	0.65	0.58	0.52	0.46	0.41
-1.00	1.97	1.54	1.27	1.08	0.92	0.80	0.71	0.62	0.56	0.50	0.45	0.40
-2.00	2.09	1.69	1.35	1.12	0.95	0.82	0.71	0.63	0.57	0.51	0.45	-
-3.00	2.10	1.69	1.40	1.17	1.00	0.86	0.77	0.68	0.60	-	-	-
-4.00	-	-	-	1.15	0.99	0.86	0.76	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
3DU	Hitch	CANT	+/- 60° - +/- 120°		67%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	1.38	1.21	1.07	-	-	-	-	-
7.00	-	-	-	-	-	1.20	1.07	0.95	0.77	-	-	-
6.00	-	-	-	-	-	1.22	1.08	0.93	0.78	0.65	0.51	-
5.00	-	-	-	1.69	1.43	1.24	1.07	0.90	0.75	0.63	0.52	0.41
4.00	-	2.50	1.99	1.68	1.39	1.16	0.98	0.83	0.70	0.59	0.50	0.41
3.00	-	-	1.66	1.41	1.19	1.01	0.86	0.73	0.63	0.54	0.45	0.38
2.00	-	-	1.20	1.11	0.98	0.85	0.74	0.64	0.55	0.48	0.41	0.35
1.00	-	-	1.09	0.95	0.83	0.73	0.64	0.56	0.49	0.42	0.36	0.30
0.00	-	-	1.04	0.87	0.75	0.65	0.57	0.50	0.44	0.38	0.33	0.27
-1.00	1.85	1.35	1.07	0.89	0.74	0.63	0.54	0.47	0.41	0.36	0.31	0.25
-2.00	1.99	1.52	1.16	0.93	0.76	0.64	0.55	0.47	0.42	0.37	0.32	-
-3.00	2.01	1.52	1.22	0.99	0.82	0.69	0.60	0.53	0.45	-	-	-
-4.00	-	-	-	0.96	0.81	0.69	0.59	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	2.50 Config	3.50 Sector	4.50	6.00 Osc Axle	6.50 Safety	7.50 Lift Mode	7.50
3EU	Hitch	CANT	+/- 120° - +/- 130° Over Fixed End		67%	Tandem		



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	1.55	1.37	1.23	-	-	-	-	-
7.00	-	-	-	-	-	1.37	1.23	1.10	0.92	-	-	-
6.00	-	-	-	-	-	1.38	1.24	1.09	0.93	0.79	0.65	-
5.00	-	-	-	1.85	1.60	1.40	1.23	1.06	0.90	0.78	0.66	0.55
4.00	-	2.58	2.13	1.84	1.56	1.33	1.14	0.99	0.86	0.74	0.64	0.55
3.00	-	-	1.84	1.59	1.37	1.19	1.03	0.90	0.79	0.69	0.60	0.52
2.00	-	-	1.43	1.32	1.18	1.05	0.92	0.81	0.72	0.63	0.56	0.49
1.00	-	-	1.33	1.18	1.05	0.93	0.83	0.74	0.66	0.58	0.52	0.46
0.00	-	-	1.29	1.11	0.97	0.86	0.76	0.68	0.61	0.54	0.49	0.43
-1.00	2.04	1.60	1.32	1.13	0.96	0.84	0.73	0.65	0.58	0.52	0.47	0.42
-2.00	2.16	1.75	1.40	1.16	0.99	0.85	0.74	0.66	0.60	0.53	0.47	-
-3.00	2.18	1.74	1.45	1.22	1.04	0.89	0.80	0.71	0.62	-	-	-
-4.00	-	-	-	1.19	1.03	0.90	0.79	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
3FU	Hitch	CANT	+/- 130° - +/- 140° Over Fixed End		67%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	1.67	1.48	1.33	-	-	-	-	-
7.00	-	-	-	-	-	1.48	1.33	1.19	1.00	-	-	-
6.00	-	-	-	-	-	1.49	1.33	1.18	1.01	0.87	0.72	-
5.00	-	-	-	1.99	1.72	1.51	1.32	1.14	0.98	0.85	0.73	0.62
4.00	-	2.77	2.29	1.98	1.68	1.44	1.24	1.08	0.94	0.81	0.71	0.61
3.00	-	-	2.00	1.73	1.49	1.29	1.13	0.99	0.87	0.76	0.67	0.59
2.00	-	-	1.59	1.46	1.30	1.15	1.02	0.90	0.80	0.71	0.63	0.55
1.00	-	-	1.49	1.32	1.17	1.04	0.92	0.83	0.74	0.66	0.59	0.52
0.00	-	-	1.45	1.24	1.09	0.96	0.86	0.77	0.69	0.62	0.55	0.50
-1.00	2.28	1.79	1.48	1.26	1.08	0.94	0.83	0.74	0.66	0.59	0.54	0.49
-2.00	2.40	1.94	1.56	1.30	1.11	0.96	0.84	0.75	0.68	0.61	0.54	-
-3.00	2.42	1.94	1.61	1.35	1.16	1.00	0.89	0.79	0.70	-	-	-
-4.00	-	-	-	1.33	1.15	1.00	0.88	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
3GU	Hitch	CANT	+/- 140° - +/- 160° Over Fixed End		67%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	1.92	1.70	1.53	-	-	-	-	-
7.00	-	-	-	-	-	1.70	1.53	1.37	1.17	-	-	-
6.00	-	-	-	-	-	1.71	1.53	1.36	1.17	1.02	0.87	-
5.00	-	-	-	2.27	1.97	1.73	1.52	1.32	1.15	1.01	0.87	0.75
4.00	-	3.17	2.62	2.26	1.93	1.66	1.44	1.26	1.10	0.97	0.85	0.74
3.00	-	-	2.33	2.01	1.74	1.51	1.33	1.17	1.04	0.92	0.81	0.72
2.00	-	-	1.92	1.75	1.55	1.37	1.22	1.08	0.97	0.86	0.77	0.69
1.00	-	-	1.82	1.60	1.42	1.26	1.12	1.01	0.90	0.81	0.73	0.65
0.00	-	-	1.78	1.53	1.34	1.19	1.06	0.95	0.85	0.77	0.70	0.63
-1.00	2.71a	2.19	1.81	1.55	1.33	1.16	1.03	0.92	0.83	0.75	0.68	0.62
-2.00	2.90	2.34	1.89	1.58	1.36	1.18	1.04	0.93	0.84	0.76	0.68	-
-3.00	2.91	2.33	1.94	1.64	1.41	1.22	1.09	0.98	0.87	-	-	-
-4.00	-	-	-	1.61	1.40	1.23	1.08	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
3HU	Hitch	CANT	+/- 160° - +/- 180° Over Fixed End		67%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	3.95	3.37a	2.55a	-	-	-	-	-
7.00	-	-	-	-	-	3.50	3.15	2.82	2.39a	-	-	-
6.00	-	-	-	-	-	3.52	3.16	2.83	2.53	2.27	1.55a	-
5.00	-	-	-	4.59	3.98	3.51	3.15	2.80	2.50	2.26	2.03	1.52a
4.00	-	6.42	5.32	4.58	3.96	3.46	3.06	2.73	2.46	2.22	2.01	1.83
3.00	-	-	5.03	4.33	3.77	3.32	2.95	2.65	2.39	2.17	1.97	1.80
2.00	-	-	3.11a	4.06	3.58	3.18	2.84	2.56	2.32	2.11	1.93	1.77
1.00	-	-	3.18a	3.92	3.45	3.06	2.75	2.48	2.26	2.06	1.89	1.74
0.00	-	-	4.23a	3.85	3.37	2.99	2.68	2.43	2.21	2.02	1.86	1.71
-1.00	2.71a	4.24a	4.47	3.87	3.36	2.97	2.65	2.40	2.18	2.00	1.84	1.70
-2.00	4.94a	5.43	4.60	3.90	3.38	2.98	2.66	2.40	2.20	2.01	1.84	-
-3.00	6.31b	5.51	4.58	3.92	3.41	3.01	2.69	2.43	2.21	-	-	-
-4.00	-	-	-	3.27b	2.95b	2.70b	2.27b	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	7.50
3AL	Hitch	CANT	+/- 10° Over Osc End		90%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	4.11a	3.37a	2.55a	-	-	-	-	-
7.00	-	-	-	-	-	3.89	3.38	2.93	2.39a	-	-	-
6.00	-	-	-	-	-	3.91	3.37	2.97	2.58	2.25	1.55a	-
5.00	-	-	-	4.84a	4.54	3.88	3.38	2.93	2.54	2.23	1.96	1.52a
4.00	-	6.70c	6.70c	5.50	4.52	3.82	3.27	2.83	2.47	2.17	1.92	1.70
3.00	-	-	6.34	5.12	4.25	3.59	3.09	2.70	2.37	2.10	1.87	1.66
2.00	-	-	3.11a	4.66	3.94	3.37	2.92	2.56	2.26	2.01	1.80	1.60
1.00	-	-	3.18a	4.40	3.71	3.18	2.77	2.44	2.17	1.94	1.74	1.55
0.00	-	-	4.23a	4.29	3.58	3.07	2.67	2.35	2.10	1.88	1.69	1.51
-1.00	2.71a	4.24a	5.30	4.32	3.57	3.03	2.63	2.31	2.05	1.84	1.66	1.50
-2.00	4.94a	5.99a	5.49	4.38	3.61	3.06	2.64	2.32	2.08	1.87	1.67	-
-3.00	6.31b	5.85b	5.42	4.37	3.64	3.10	2.69	2.37	2.10	-	-	-
-4.00	-	-	-	3.27b	2.95b	2.70b	2.27b	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
3BL	Hitch	CANT	+/- 10° - +/- 40° Over Osc End		90%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	3.03	2.61	2.29	-	-	-	-	-
7.00	-	-	-	-	-	2.60	2.29	2.02	1.69	-	-	-
6.00	-	-	-	-	-	2.63	2.30	2.00	1.70	1.43	1.17	-
5.00	-	-	-	3.72	3.10	2.65	2.28	1.95	1.66	1.41	1.18	0.97
4.00	-	5.90	4.51	3.70	3.04	2.54	2.16	1.85	1.58	1.34	1.14	0.96
3.00	-	-	4.01	3.29	2.74	2.32	1.99	1.72	1.47	1.26	1.08	0.92
2.00	-	-	3.11a	2.86	2.45	2.10	1.82	1.57	1.36	1.17	1.01	0.87
1.00	-	-	3.13	2.62	2.23	1.92	1.68	1.45	1.26	1.09	0.95	0.82
0.00	-	-	3.07	2.50	2.11	1.81	1.57	1.36	1.18	1.03	0.90	0.78
-1.00	2.71a	4.04	3.13	2.53	2.09	1.78	1.52	1.31	1.13	0.99	0.87	0.77
-2.00	4.94a	4.37	3.27	2.59	2.13	1.80	1.54	1.32	1.16	1.01	0.88	-
-3.00	6.15	4.36	3.35	2.68	2.21	1.87	1.62	1.40	1.20	-	-	-
-4.00	-	-	-	2.64	2.20	1.87	1.61	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
3CL	Hitch	CANT	+/- 40° - +/- 60° Over Osc End		90%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	2.97	2.53	2.21	-	-	-	-	-
7.00	-	-	-	-	-	2.53	2.20	1.93	1.59	-	-	-
6.00	-	-	-	-	-	2.55	2.21	1.91	1.60	1.33	1.07	-
5.00	-	-	-	3.70	3.04	2.57	2.20	1.86	1.55	1.30	1.08	0.87
4.00	-	6.16	4.57	3.68	2.98	2.46	2.07	1.76	1.48	1.24	1.04	0.86
3.00	-	-	4.02	3.24	2.66	2.23	1.89	1.61	1.37	1.16	0.98	0.82
2.00	-	-	3.11a	2.77	2.35	2.00	1.72	1.46	1.25	1.06	0.91	0.77
1.00	-	-	3.07	2.52	2.12	1.81	1.55	1.33	1.14	0.98	0.84	0.72
0.00	-	-	3.00	2.39	1.99	1.69	1.44	1.23	1.06	0.91	0.79	0.68
-1.00	2.71a	4.07	3.06	2.43	1.98	1.66	1.39	1.18	1.01	0.88	0.76	0.66
-2.00	4.94a	4.44	3.21	2.49	2.02	1.68	1.41	1.19	1.04	0.90	0.77	-
-3.00	6.31b	4.44	3.30	2.59	2.10	1.75	1.50	1.28	1.08	-	-	-
-4.00	-	-	-	2.54	2.09	1.76	1.48	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
3DL	Hitch	CANT	+/- 60° - +/- 120°		90%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	2.66	2.30	2.02	-	-	-	-	-
7.00	-	-	-	-	-	2.29	2.02	1.78	1.45	-	-	-
6.00	-	-	-	-	-	2.31	2.03	1.76	1.46	1.22	0.97	-
5.00	-	-	-	3.27	2.73	2.34	2.01	1.71	1.42	1.19	0.98	0.79
4.00	-	5.14	3.95	3.26	2.67	2.23	1.89	1.59	1.34	1.13	0.95	0.78
3.00	-	-	3.46	2.85	2.38	2.01	1.72	1.46	1.24	1.05	0.89	0.74
2.00	-	-	2.78	2.43	2.09	1.80	1.54	1.31	1.12	0.96	0.82	0.69
1.00	-	-	2.62	2.20	1.87	1.61	1.38	1.19	1.02	0.88	0.75	0.64
0.00	-	-	2.54	2.08	1.75	1.49	1.27	1.10	0.94	0.82	0.70	0.60
-1.00	2.71a	3.34	2.59	2.11	1.74	1.45	1.23	1.05	0.90	0.78	0.68	0.59
-2.00	4.92	3.65	2.73	2.16	1.78	1.48	1.24	1.06	0.93	0.80	0.68	-
-3.00	5.12	3.64	2.81	2.25	1.86	1.55	1.33	1.14	0.97	-	-	-
-4.00	-	-	-	2.21	1.85	1.56	1.31	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	2.50 Config	3.50 Sector	4.50	6.00 Axle	5.50 Safety	6.50 Lift Mode	7.50
3EL	Hitch	CANT	+/- 120° - +/- 130° Over Fixed End		90%	Tandem		



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	3.36	2.92	2.55	-	-	-	-	-
7.00	-	-	-	-	2.91	2.58	2.29	1.95	-	-	-	-
6.00	-	-	-	-	2.94	2.59	2.27	1.96	1.70	1.42	-	-
5.00	-	-	-	4.06	3.43	2.96	2.57	2.23	1.93	1.68	1.44	1.22
4.00	-	6.19	4.86	4.05	3.37	2.86	2.45	2.13	1.86	1.62	1.40	1.21
3.00	-	-	4.40	3.66	3.09	2.64	2.29	2.01	1.76	1.54	1.34	1.17
2.00	-	-	3.11a	3.25	2.81	2.44	2.13	1.88	1.66	1.45	1.28	1.12
1.00	-	-	3.18a	3.03	2.60	2.27	1.99	1.77	1.56	1.37	1.21	1.07
0.00	-	-	3.52	2.92	2.49	2.16	1.90	1.68	1.48	1.31	1.16	1.03
-1.00	2.71a	4.24a	3.55	2.95	2.48	2.13	1.86	1.64	1.44	1.28	1.14	1.02
-2.00	4.94a	4.80	3.71	3.00	2.51	2.15	1.87	1.65	1.47	1.30	1.14	-
-3.00	6.31b	4.77	3.76	3.09	2.59	2.21	1.95	1.72	1.50	-	-	-
-4.00	-	-	-	3.05	2.58	2.22	1.94	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
3FL	Hitch	CANT	+/- 130° - +/- 140° Over Fixed End		90%	Tandem	



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	4.09	3.37a	2.55a	-	-	-	-	-
7.00	-	-	-	-	3.47	3.02	2.63	2.24	-	-	-	-
6.00	-	-	-	-	3.49	3.03	2.63	2.25	1.95	1.55a	-	-
5.00	-	-	-	4.84a	4.11	3.48	3.01	2.58	2.21	1.92	1.65	1.40
4.00	-	6.70c	6.36	5.04	4.10	3.40	2.88	2.47	2.14	1.86	1.62	1.39
3.00	-	-	5.79	4.61	3.77	3.16	2.70	2.33	2.03	1.78	1.56	1.35
2.00	-	-	3.11a	4.12	3.45	2.93	2.52	2.19	1.92	1.70	1.48	1.30
1.00	-	-	3.18a	3.86	3.21	2.74	2.37	2.07	1.83	1.61	1.41	1.25
0.00	-	-	4.23a	3.73	3.08	2.61	2.26	1.98	1.75	1.54	1.36	1.20
-1.00	2.71a	4.24a	4.68	3.76	3.06	2.58	2.21	1.93	1.71	1.50	1.33	1.19
-2.00	4.94a	5.99a	4.94	3.82	3.11	2.60	2.23	1.95	1.73	1.53	1.34	-
-3.00	6.31b	5.85b	4.89	3.86	3.17	2.67	2.30b	2.01	1.77	-	-	-
-4.00	-	-	-	3.27b	2.95b	2.63	2.27	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	2.50 Config	3.50 Sector	4.50	6.00 Axle	5.50 Safety	6.50 Lift Mode	7.50
3GL	Hitch	CANT	+/- 140° - +/- 160° Over Fixed End		75%	Tandem		



	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	4.11a	3.37a	2.55a	-	-	-	-	-
7.00	-	-	-	-	-	3.60	3.21	2.83	2.39a	-	-	-
6.00	-	-	-	-	-	3.62	3.21	2.86	2.52	2.24	1.55a	-
5.00	-	-	-	4.84a	4.13	3.61	3.19	2.82	2.49	2.22	1.98	1.52a
4.00	-	6.70c	5.77	4.86	4.13	3.55	3.10	2.74	2.44	2.18	1.96	1.76
3.00	-	-	5.41	4.56	3.90	3.38	2.97	2.64	2.36	2.12	1.91	1.73
2.00	-	-	3.11a	4.23	3.67	3.21	2.84	2.53	2.28	2.05	1.86	1.69
1.00	-	-	3.18a	4.05	3.51	3.08	2.73	2.44	2.20	1.99	1.82	1.66
0.00	-	-	4.23a	3.96	3.41	2.99	2.65	2.38	2.15	1.95	1.78	1.63
-1.00	2.71a	4.24a	4.70	3.99	3.40	2.96	2.62	2.34	2.11	1.92	1.76	1.62
-2.00	4.94a	5.92	4.86	4.03	3.43	2.98	2.63	2.35	2.13	1.94	1.76	-
-3.00	6.31b	5.85b	4.83	4.04	3.46	3.02	2.66	2.38	2.15	-	-	-
-4.00	-	-	-	3.27b	2.95b	2.70b	2.27b	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
3HL	Hitch	CANT	+/- 160° - +/- 180° Over Fixed End		75%	Tandem	

	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	4.11a	3.37a	2.55a	-	-	-	-	-
7.00	-	-	-	-	-	4.42	3.85	3.21a	2.39a	-	-	-
6.00	-	-	-	-	-	4.39a	3.88	3.43	3.07	2.71a	1.55a	-
5.00	-	-	-	4.84a	4.67a	4.42	3.86	3.43k	3.07	2.75	2.46	1.52a
4.00	-	6.70c	6.70c	6.04	5.12	4.39	3.85	3.39	3.02	2.70	2.43	2.20
3.00	-	-	6.70c	5.78	4.91	4.23	3.71	3.29	2.94	2.64	2.39	2.17
2.00	-	-	3.11a	5.44	4.67	4.06	3.57	3.18	2.85	2.57	2.34	2.13
1.00	-	-	3.18a	5.22	4.49	3.92	3.46	3.08	2.77	2.51	2.29	2.09
0.00	-	-	4.23a	5.14	4.39	3.82	3.38	3.02	2.72	2.46	2.25	2.06
-1.00	2.71a	4.24a	5.51a	5.15a	4.38	3.80	3.34	2.98	2.68	2.44	2.23	2.04a
-2.00	4.94a	5.99a	6.22	5.20	4.41	3.82	3.35	2.99	2.70	2.45	2.23	-
-3.00	6.31b	5.85b	5.47b	5.03b	4.38	3.81b	3.36	2.99	2.69	-	-	-
-4.00	-	-	-	3.27b	2.95b	2.70b	2.27b	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
4AU	Hitch	SUPER CANT	+/- 180°		67%	Tandem	

	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	1.25	1.10	0.98	-	-	-	-	-
7.00	-	-	-	-	-	1.09	0.97	0.86	0.69	-	-	-
6.00	-	-	-	-	-	1.11	0.98	0.85	0.70	0.58	0.45	-
5.00	-	-	-	1.53	1.30	1.12	0.97	0.81	0.67	0.56	0.46	0.36
4.00	-	2.22	1.78	1.52	1.26	1.05	0.88	0.74	0.62	0.52	0.44	0.35
3.00	-	-	1.46	1.25	1.06	0.90	0.76	0.65	0.56	0.47	0.40	0.32
2.00	-	-	1.02	0.96	0.86	0.75	0.65	0.56	0.48	0.41	0.35	0.27
1.00	-	-	0.91	0.81	0.71	0.63	0.55	0.48	0.42	0.36	0.30	0.22
0.00	-	-	0.86	0.73	0.63	0.55	0.48	0.42	0.37	0.32	0.25	0.19
-1.00	1.52	1.12	0.90	0.75	0.62	0.53	0.45	0.39	0.34	0.28	0.22	0.17
-2.00	1.66	1.29	0.98	0.79	0.65	0.54	0.46	0.40	0.35	0.30	0.23	-
-3.00	1.67	1.29	1.04	0.85	0.70	0.59	0.51	0.45	0.38	-	-	-
-4.00	-	-	-	0.82	0.69	0.59	0.51	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

Duty	Lift Point	Config	Sector	Osc Axle	Safety	Lift Mode	
4AL	Hitch	SUPER CANT	+/- 180°		75%	Tandem	

	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
10.00	-	-	-	-	-	-	-	-	-	-	-	-
9.00	-	-	-	-	-	-	-	-	-	-	-	-
8.00	-	-	-	-	1.76	1.56	1.40	-	-	-	-	-
7.00	-	-	-	-	-	1.55	1.40	1.25	1.05	-	-	-
6.00	-	-	-	-	-	1.57	1.40	1.24	1.06	0.91	0.75	-
5.00	-	-	-	2.10	1.81	1.59	1.39	1.20	1.03	0.89	0.76	0.64
4.00	-	2.93	2.41	2.09	1.77	1.51	1.30	1.12	0.98	0.85	0.73	0.63
3.00	-	-	2.09	1.81	1.56	1.35	1.18	1.03	0.90	0.79	0.69	0.60
2.00	-	-	1.64	1.51	1.35	1.20	1.05	0.93	0.83	0.73	0.64	0.57
1.00	-	-	1.53	1.36	1.20	1.07	0.95	0.85	0.76	0.67	0.60	0.53
0.00	-	-	1.49	1.28	1.12	0.99	0.88	0.79	0.70	0.63	0.56	0.50
-1.00	2.35	1.84	1.52	1.30	1.11	0.96	0.85	0.75	0.67	0.60	0.54	0.48
-2.00	2.48	2.00	1.61	1.34	1.13	0.98	0.86	0.76	0.69	0.62	0.55	-
-3.00	2.50	2.00	1.66	1.40	1.19	1.03	0.92	0.81	0.72	-	-	-
-4.00	-	-	-	1.37	1.18	1.03	0.91	-	-	-	-	-
-5.00	-	-	-	-	-	-	-	-	-	-	-	-

NOTES SWL = 75% of Tip Load or 87% of Max System Hydraulic Pressure (whichever is the lower). In addition, ISO4305 1.33P + 0.1F. Radius/Height are given in metres. Loads are given in tonnes, and assume that the load is suspended vertically below the bucket pin with no other equipment attached. Loads marked 'b' boom, 'a' arm and 'r' artic are limited by hydraulic capacity (87% of system maximum hydraulic pressure).